

Popular Science

FOUNDED MONTHLY 1872




See Page 38

DECEMBER

Most Wonderfully Illustrated Magazine in the World

25 CENTS

Copyrighted material

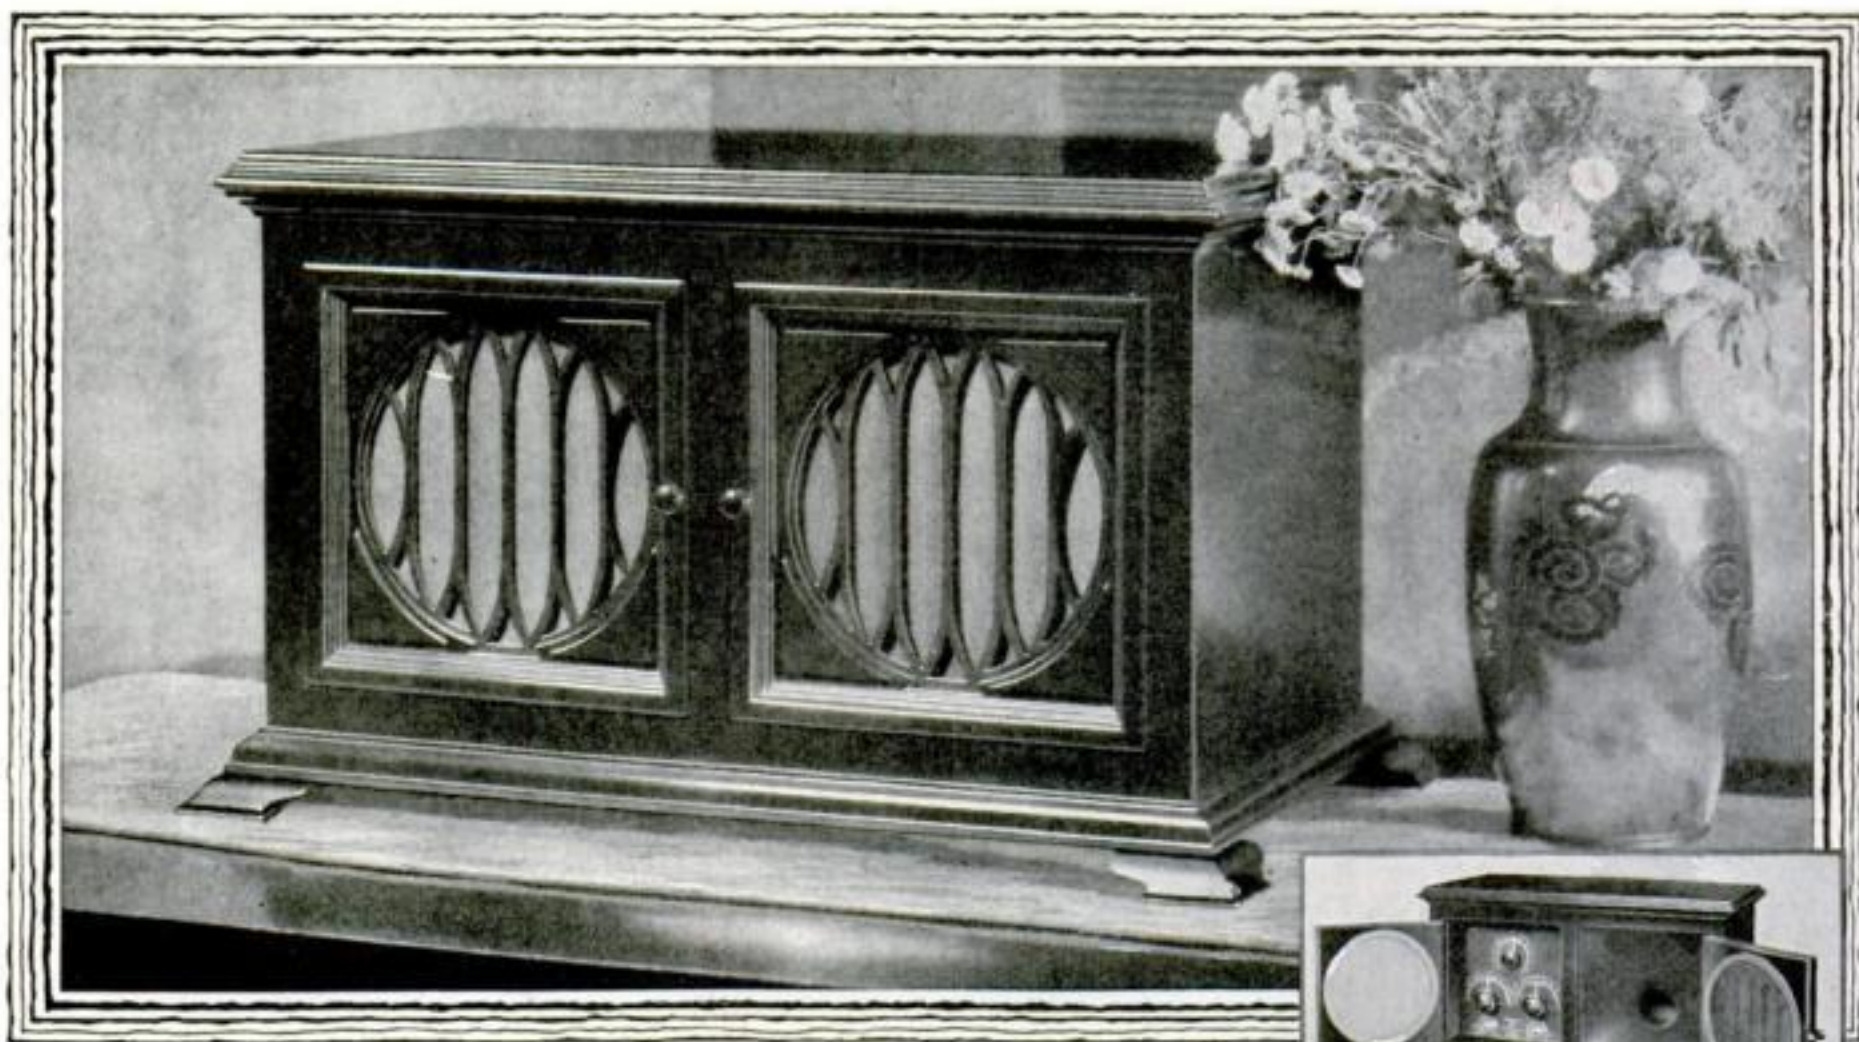

Radiola IV.

A long distance receiver made with the perfection for which RCA is famous. Mahogany finished cabinet; with four tubes (one spare); head phones and plug; silk covered wires. **\$275**
At the nearest radio or electrical dealer.

Opera from the Stage Football from the Field with a **Radiola IV**

REG. U. S. PAT. OFF.

Tune in—then shut the doors. Sit back and listen to the music that's being sung a hundred miles away. Dance to fine orchestras playing in the big cities. Call in the crowd when the big game is on. It's real!

Enclosed in its fine cabinet—with all its workings hidden—with its batteries inside—and its loudspeaker built-in—Radiola IV is a great achievement. Simple, powerful, dependable. Not only by virtue of its radio construction, but by the perfection of its workmanship and finish. It gets distance—gets it simply and clearly, at the turn of a knob. And fits with dignity into the finest living room.

Tune in—the air is crowded! Fun—music—education—big, exciting events. Listen in on them all with a Radiola IV.



*This symbol of
quality is your
protection*

Send for the free booklet
that describes every Radiola

RADIO CORPORATION OF AMERICA
Dept. 2080. (Address office nearest you.)
Please send me your free Radio Booklet.

Name _____
Street Address _____
City _____ R. F. D. _____
State _____


Radio Corporation of America

Sales Department District Sales Offices
233 Broadway, New York 10 So. LaSalle St., Chicago, Ill. 433 California St., San Francisco, Cal.

Radiola

REG. U. S. PAT. OFF.

21 Jewel Burlington

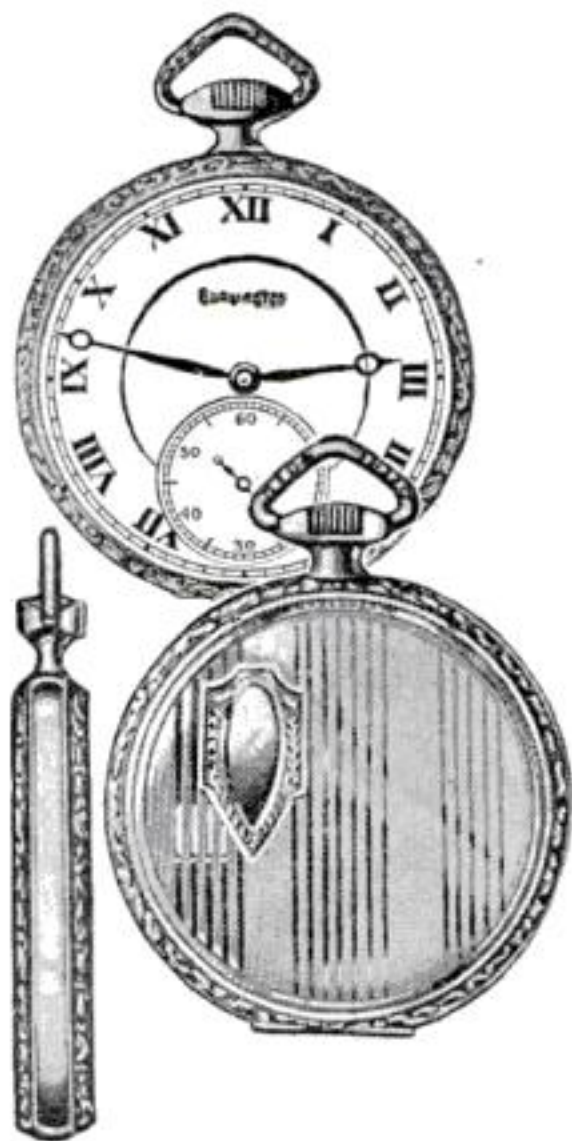

Adjusted to the Second
Adjusted to Temperature
Adjusted to Isochronism
Adjusted to Positions

21 Ruby and Sapphire Jewels
25 Year Gold Strata Case
Your choice of Dials
(Including Montgomery R.R. Dial)
New Ideas in Thin Cases

Only \$1.00 Down

Only One Dollar Down will buy this masterpiece of watch manufacture. The balance you are allowed to pay in small, easy, monthly payments. The Burlington—a 21-Jewel Watch—is sold to you at a price much lower than that of other high-grade watches. Besides, you

Just Out!

Latest designs in Watch Cases beautifully illustrated in our booklet. Send for FREE Copy.

have the selection of the finest thin model designs and latest styles in watch cases. Don't delay! Write for the FREE Watch Book and our SPECIAL OFFER today.

Write While This Special Offer Lasts

Get the Burlington Watch Book by sending this coupon. Find out about this great special offer which is being made for only a limited time. You will know a great deal more about watch buying when you read this book. You will be able to "steer clear" of the over-priced watches which are no better. Remember, the Burlington is sent to you for only One Dollar down, balance in small monthly payments. Send the coupon for watch book and our special offer TODAY.

BURLINGTON WATCH COMPANY

Dept. 13-69, 19th Street and Marshall Blvd., Chicago
Canadian Address: 62 Albert St., Winnipeg, Manitoba

Burlington Watch Company

Dept. 13-69, 19th St. and Marshall Blvd., Chicago
Canadian Address: 62 Albert St., Winnipeg, Manitoba

Please send me (without obligations and prepaid) your free book on watches with full explanation of your \$1.00 down offer on the Burlington Watch.

Name _____

Address _____

POPULAR SCIENCE MONTHLY

Most Wonderfully Illustrated Magazine in the World

DECEMBER, 1923; Vol. 103, No. 6

25 cents a Copy; \$2.50 a Year



Published in New York City at

225 West Thirty-ninth Street

A YOUNG fellow in our town used to have an exaggerated opinion of his own importance. He talked a lot and said little. Now he thinks a lot and talks little. He has been reading and thinking of recent revelations of science in the world of the infinitely large and the infinitely small. Such thought is good to reduce the ego of mortals.

* *

CONSIDER our stellar system, the Milky Way. It consists of millions of stars, alongside of which our sun, a giant compared to the earth, is but a dwarf. Antares, the largest star yet measured, larger even than Betelgeuse, has a diameter of 400,000,000 miles. Our world, with its diameter of 8000 miles, compares with it about as does an anthill with the Woolworth Building.

* *

YET in the depths of space are many other systems, perhaps larger than ours. If by some chance the earth should collide with one of these tremendous celestial bodies, it would disappear as quickly as a snowflake in a blast furnace. Romance is there—the romance of the infinitely big. And there is mystery, too—the mystery of the unknown and the intangible.

* *

ROMANTIC also is the atom. Its wonders are invisibly small. Each atom is a miniature solar sys-

tem, so small that no human eye has ever seen it. Electrons, concentrated electrical charges, revolve with a velocity of 93,000 miles a second about a nucleus as the planets revolve about our sun. One thousand million million million of these electrons equal the weight of a single cigarette paper. A scientist explained that if one imagined an atom having a diameter of a

mile, an electron moving in it would be as large as a dining-table and the nucleus the size of a pea.

* *

TEAR the atom apart and you will find it veritably alive with a prodigious force. It has been pointed out that the electronic energy in a glass of water is sufficient to propel the *Leviathan* to Europe and back at top speed. Science, inseparable twin of Romance, is striving to harness this tremendous power. One day it will do the work of the world.

* *

ON THIS planet, where a thousand miles is a great distance and the head of a pin is small, it is difficult to comprehend the infinite. We are in something of the position of moths, attracted by an arc light, striving to under-

stand electricity. But stories of these wonders serve to reduce the ego. They did that for the young man in our town. And they help men understand the promises of science for the future of the world.

In Next Month's Issue

The Story of the Mind—First article in an unusually helpful psychological series by James J. Walsh, M. D., Ph. D., famous American surgeon and psychologist.

Harnessing the River Jordan—How Science, in its restoration of the Holy Land, today is carrying out ancient Biblical prophecies.

Jack Binns on Radio—An understandable and usable article on the heterodyne receiver by the foremost writer on radio in America.

Your New Car—Mechanical improvements in the 1924 automobile. A practical article that will help you make your selection.

And 200 other fascinating articles and pictures

See Special Christmas Offer on page 88

POPULAR SCIENCE MONTHLY

Issued monthly. Single copy, 25 cents. Yearly subscription to United States, its possessions, and Canada, \$2.50; foreign countries, \$3. Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A. Copyright, 1923, by the Modern Publishing Co. The contents of this magazine must not be reprinted without permission. H. J. Fisher, President; R. C. Wilson, Vice-President; O. B. Capen, Secretary and Treasurer.

If You Want Bigger Pay *Make This* **FREE TEST**

There's a sure way to increase your earning power. And here is such an opportunity. Look into it—you may recognize it as your one chance to earn the biggest money of your life.



ARE you ready for a shock?

Then, let me tell you that if you have average intelligence and can read and write, there is a quick and easy way for you to double or triple your present salary—to earn enough money to satisfy any average ambition. And after reading this offer, if you do not quickly make more money, you have no one to blame but yourself.

Don't take my word for it. By a simple free test—one you can make in the privacy of your home—you will know that every word I say is true—or otherwise. The test does not obligate you or cost you one penny. But make it! Then judge for yourself. It has proved to be THE opportunity for thousands. They have found the way to bigger pay—are now earning from five to twenty times as much as formerly. And the beauty of it is they enjoy every minute in the day's work. They are their own bosses.

A Field of Unlimited Opportunities

The thousands who have made this test before you, and who are now making the money you would like to make, are now salesmen. Ninety-five per cent once thought they were not "cut out for selling," that salesmen were "born" and not made. They found it was a fallacy that had kept them in the rut. They discovered that any one with proper training can sell, and they are making from \$5,000 to \$10,000 a year because they had the vision to recognize opportunity.

Are trained salesmen in demand? Look at the affidavit on this page.

Thousands Have Proved It

For instance, Ellis Sumner Cook, 20 E. Jackson Blvd., Chicago, left a \$25 a week job and last year made \$9,000! H. D. Miller, another Chicago boy, was making \$100 a month as a stenographer in July, 1922. In September, 3 months later, he was making \$100 a week as a salesman. W. P. Clenny of Kansas City, Mo., stepped from a \$150 a month clerkship into a selling job at \$500 a month. He is making \$850 a month now.

M. V. Stephens of Albany, Ky., was making \$25 a week. He took up this training and now makes five times that much. J. H. Cash of Atlanta, Ga., exchanged his \$75 a month job for one which pays him \$500 a month. O. H. Malfort of Hartford, Conn., stepped into a \$10,000 position as a SALES MANAGER—so thorough is this training. All these successes are due to this easy, fascinating and rapid way to master certain invincible secrets of selling.

These men were formerly clerks, bookkeepers, factory workers, farm hands, mechanics, machinists, chauffeurs, firemen, motormen, conductors, etc. Their success proves that previous experience or training has nothing to do with success in the selling field. It proves that any man who wants to, and who is willing to put in a few hours of spare time each week, can quickly get a selling position and make big money. And they started with this free test.

Why don't you make this free test and prove, to your own satisfaction, that a bigger salary is easy to get? The test is contained in a free book, "Modern Salesmanship," which we will gladly send you without obligation. After reading the

book through you will ask yourself the questions it brings up. The answers will show you whether you can get away from the humdrum, small-pay job for the lucrative and fascinating work of selling.

Make This Free Test At Once


Don't turn this page until you have clipped the coupon, filled it out, and sent it on its way. It may mean the turning point in your life. Write now while the impulse to succeed is upon you.

NATIONAL SALESMEN'S TRAINING ASSOCIATION
Dept. 15-W Chicago, Illinois

National Salesmen's Training Association
Dept. 15-W, Chicago, Illinois.

Please send me without obligation on my part, your free book, "Modern Salesmanship," which will enable me to test my ability at home, and full information about the N. S. T. A. System of Salesmanship Training and Employment Service.

Name.....
Address.....
City.....State.....
Age.....Occupation.....

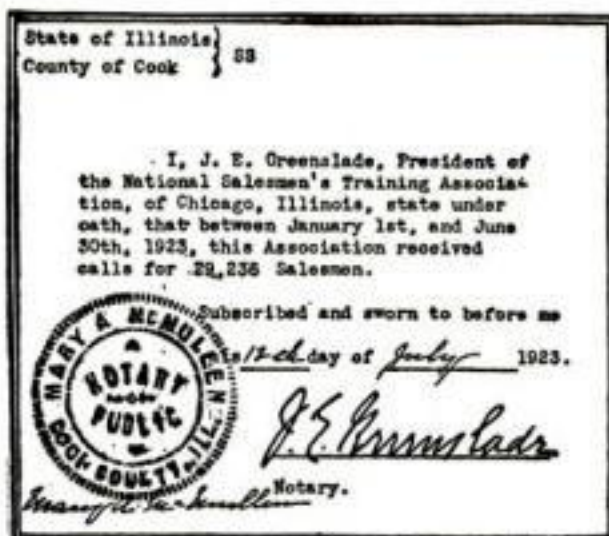

See Here!

You can make \$75 to \$125 a week!

BE AN AUTO EXPERT!



Keep your Job—stay home—loan me part of your spare time and I'll make you an AUTO EXPERT quick. A liking for machinery all you need. As directing Engineer of the big CHICAGO AUTO SHOPS I train you the "JOB-WAY"—no books or useless theories in my course. I show you the short-cuts, the inside methods acquired during my twenty years in training men.

GUARANTEE

I to prepare you right at home to go into business for yourself where you can become INDEPENDENT. I guarantee to train you to hold down any EXPERT'S job at TOP SALARY. I guarantee to make you an EXPERT right in your own home—to give you the most practical instruction ever devised in every branch of Automotive Mechanics, Automotive Electricity, Battery, Ignition, Welding, Vulcanizing, etc. And I guarantee to refund your money if you are not entirely satisfied.

Learn at HOME!

in your spare time! Prepare to get your share of the thousand million dollars spent annually for auto upkeep. Now 15 million autos, trucks and tractors crowding the cities, highways and farms. 15,000,000 electrical systems to maintain and repair, 50,000,000 tires to replace and repair, 15 million batteries to test and service, 15 million autos, trucks and tractors to keep going.

I Train you quick the JOB-WAY!

I train you with tools, not books—with JOBS, not theories. I stay with you until you are a success! Good jobs everywhere! In garages, repair shops, service-stations, factories. As salesmen, demonstrators, electrical experts, Master Mechanics. In Battery Stations, Vulcanizing Shops, Welding Plants or in business for yourself. Salaries sky-high, easy hours, and opportunities for a business of your own all around you! Man alive! You cannot afford to hesitate a minute!

EARN

\$3000 to \$10,000 a Year!

and Boss the Job!

You will master
Auto Mechanical Work
Auto Electrical Work
Automotive Salesman-
ship
Garage and Shop Man-
agement
Automotive Production
Work
Superintendent
Battery Work
Welding Work
Service Station Work,
etc.

B. W. COOKE, Directing Engineer

To meet the need for AUTO EXPERTS Mr. Cooke has spent more than 20 years preparing his "JOB-WAY" home training. There is no other way for you to get ALL the branches of Automotive instruction. Schools train Auto Mechanics. Cook's "JOB-WAY" training makes you an Auto EXPERT!



A Business of Your own paying \$5,000 to \$15,000 a year!

Garage Repair Work
Battery Work
Welding Work
Tire Repair Work
Auto Electrical Work
Auto Accessories Store
Tire and Battery Sales

SUCCESS COUPON

B. W. COOKE, Directing Engineer
CHICAGO AUTO SHOPS
Dept. 913,
1553 W. Madison St., CHICAGO

Please send me Free Book and complete information about your "Job-Way" training at home. Tell me about the opportunities today for Auto Experts. I am mailing this promptly to secure FREE REPAIR OUTFIT and the reduced prices and special terms you offer now. Of course, I am not obligating myself in any way.

Name.....

Address.....

City.....State.....

Mail Coupon for Free Catalog!

START NOW!

I'll help you start and help you finish. Inducements you cannot resist, RIGHT NOW to ambitious men; terms within reach of everybody! Free Employment Service to help you get the job you want at top pay! Many extras, but not one penny extra for anything. Find out how easy I have made it for you to SUCCEED thru my SUCCESS coupon. Mail it right away!

B. W. COOKE - Directing Engineer
CHICAGO AUTO SHOPS


Dept. 913, 1553 W. Madison St., CHICAGO



FREE! BIG \$18.50 REPAIR OUTFIT

I give you this fine \$18.50 repair outfit free, teach you how to use it and make money almost from the start of your training. Mail coupon and get full information.

MAIL COUPON TO-DAY!

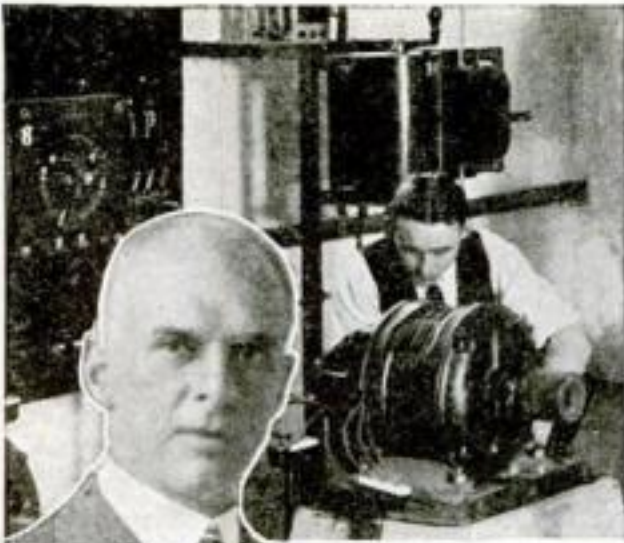

Herbert Dickerson,
Warrenton, Va.,
makes \$7,500 a year



Automotive Electricity pays W. E. Pence,
Chehalis, Wash., over \$9,000 a year



J. R. Morgan, Delaware, Ohio, makes \$30
to \$50 a day in business for himself



Electrical Experts Are in Big Demand I Will Train You at Home To Fill a Big Pay Job

Electricity— the World's Big Pay Field

Electricity is the field of the greatest opportunities. In all other trades and professions competition is so keen from over-crowding that only the exceptional man can get to the top.

Not so in the Electrical line.

Here is a profession that is fairly bubbling with possibilities—with thousands of chances for wonderful success. We stand today on the very threshold of the real Electrical Age—an Age when everything now operated by steam or gas or horses, will be moved by Electricity. But it is an Age demanding specialists—trained men—Electrical Experts. Such men can easily earn from \$12 to \$30 a day.

Money is being poured into the Electrical Industry at the rate of a billion dollars a year. Think of it—a thousand million dollars a year for electrical expansion. This means—men—jobs—opportunities.

My big book the "Vital Facts" of the electrical industry and the wonderful opportunities that await "Cooke Trained Men" tells you all about this Big Pay Field.

**Mail Coupon
for the Free
Vital FACTS**

It's a shame for you to earn \$15 or \$20 or \$30 a week, when in the same six days as an Electrical Expert you can make \$70 to \$200 a week—and do it easier—not work half so hard. Why then remain in the small-pay game, in a line of work that offers no chance, no big promotion, no big income? Fit yourself for a real job in the great electrical industry. I'll show you how.

Be an Electrical Expert Earn \$3,500 to \$10,000 a Year

Today even the ordinary Electrician—the "screw driver" kind—is making money—big money. But it's the trained man—the man who knows the whys and wherefores of Electricity—the "Electrical Expert"—who is picked out to "boss" the ordinary Electricians—to boss the Big Jobs—the jobs that pay \$3,500 to \$10,000 a Year. Get in line for one of these "Big Jobs" by enrolling now for my easily learned, quickly grasped, right-up-to-the-minute, Spare-Time Home-Study Course in Practical Electricity.

Age or Lack of Experience No Drawback

You don't have to be a College Man; you don't have to be a High School Graduate. As Chief Engineer of the Chicago Engineering Works, I know exactly the kind of training you need, and I will give you that training. My Course in Electricity is the most simple, thorough and successful in existence, and offers every man, regardless of age, education, or previous experience, the chance to become, in a very short time, an "Electrical Expert," able to make from \$70 to \$200 a week.

FREE Electrical Working Outfit FREE

With me, you do practical work—at home. You start right in after your first few lessons to work at your profession in the regular way. For this you need tools, and I give them to you absolutely free—a whole kit, a complete outfit, one that would cost you \$12 to \$15.

Your Satisfaction Guaranteed

So sure am I that you can learn Electricity—so sure am I that after studying with me, you, too, can get into the "big money" class in electrical work, that I will guarantee under bond to return every single penny paid me in tuition, if, when you have finished my Course, you are not satisfied it was the best investment you ever made.

Guarantee Backed by a Million Dollar Institution

Back of me in my guarantee, stands the Chicago Engineering Works, Inc., a million dollar institution, thus assuring to every student enrolled, not only a wonderful training in Electricity, but an unsurpassed Student Service as well.

It's this Service that makes "Cooke" training different from any other training. It's this Service, plus "Cooke" Training, that makes the "Cooke" Trained Man the "Big-Pay Man," everywhere.

Be a "Cooke" Trained Man and earn \$12 to \$30 a day—\$70 to \$200 a week—\$3,500 to \$10,000 a year.

Get Started Now—Mail Coupon

I want to send you my Electrical Book and Proof Lessons both Free. These cost you nothing and you'll enjoy them. Make the start today for a bright future in Electricity. Send in Coupon—NOW.

L. L. Cooke, Chief Engineer

Chicago Engineering Works
2150 Lawrence Ave., Dept. 39 Chicago

Use this Free Outfit Coupon!

L. L. COOKE, Dept. 39 2150 Lawrence Ave., Chicago	The Man Who Makes "Big-Pay" Men
Dear Sir: Send at once, Sample Lessons, your Big Book, and full particulars of your Free Outfit and Home Study Course, also the Free Radio Course—all fully prepaid without obligation on my part.	
Name	
Address	
Occupation	

The "Cooke" Trained Man is the "Big Pay" Man

Look Here!

Are you ambitious—are you looking for the way to Success? - Do you want an easy, pleasant job? Do you want to make from \$60 to \$200 a week? - Do you want to enjoy the luxuries of life?

Then Read My Offer!

My Guarantee

to train you right at home—to make you an EXPERT DRAFTSMAN quick! I guarantee to prepare you to hold down any big pay job in any Drafting Office and to refund every cent of your money if you are not satisfied with my training. I guarantee to give you my practical JOB-WAY instruction until you are actually placed in a drafting position paying at least

\$250 to \$300 a month!

I have recommended Drafting as a life-work to thousands of men during the past 20 years—I have seen them step into big-salaried positions after completing my course—I have thousands of letters to prove that my "Job-Way" instruction has made these men SUCCESSFUL DRAFTING EXPERTS—and I offer you now the same

opportunity to get into a business where there are always more jobs than Experts to fill them, where salaries are big, hours short, work pleasant.



COYNE SCHOOL of DRAFTING

Immediately after completing the Coyne drafting course I went to work for Armour and Company. I held my own easily with more than a hundred draftsmen and was surprised to find graduates of other schools with a year or more of experience get stuck on problems that seemed perfectly simple to me.

Five months later I left Chicago to accept a position in New York at a large increase in salary. I owe my success entirely to the thorough Coyne training.

Very sincerely yours,
L. T. DUBENDORF.

BE AN EXPERT DRAFTSMAN!

Learn at Home in your spare time!

Common schooling all you need. Learn in a few months. Plenty jobs everywhere—railroads, factories, builders, Cities, Counties, States, the U. S. Government, shipyards, automotive plants, architects and dozens of other lines all need Expert Draftsmen. Salaries range from \$60 to \$200 a week. Drafting Experts are always in line for promotion as superintendents, managers and other official positions. Before any machine, building or product can be made, a Draftsman must draw the plans! He's the key-man of Industry. Executives depend on him. Not a wheel can turn without him.

Chief Draftsman,
Coyne School of Drafting,
Dept. 915,
1-9 S. Ashland Avenue,
Chicago, Ill.

Without obligating me in any way, please send me your two books, "Drafting, the Foundation of Industry" and "Learn Drafting by the 'Job-Way'" —all absolutely free. Also complete information of your rapid home-study Drafting course, free instruments and other features.

\$19 Professional Drafting Outfit FREE!

The Coyne "Job-Way" teaches you Drafting with the same instruments and outfits you will use as an EXPERT when employed at a big salary. In order to help you START RIGHT NOW, we offer this \$19 Outfit FREE to every Coyne student. Coupon brings complete information. Mail it immediately.

2 Books FREE!

"Drafting the Foundation of Industry" and "Learn Drafting by the 'Job-Way'." Prices reduced, easy terms now. Mail coupon today and take advantage of this opportunity.

Address Chief Draftsman,

COYNE SCHOOL of DRAFTING

Dept. 915, 1-9 S. Ashland Avenue, CHICAGO, Ill.

MAIL COUPON TO-DAY!

Name.....

St. No.....

City..... State.....




A Wonderful Bargain!

The Famous Two-Volume Book of Etiquette

500,000 Already Sold at \$3.50

NOW \$1.98
ONLY For a Very Limited Time

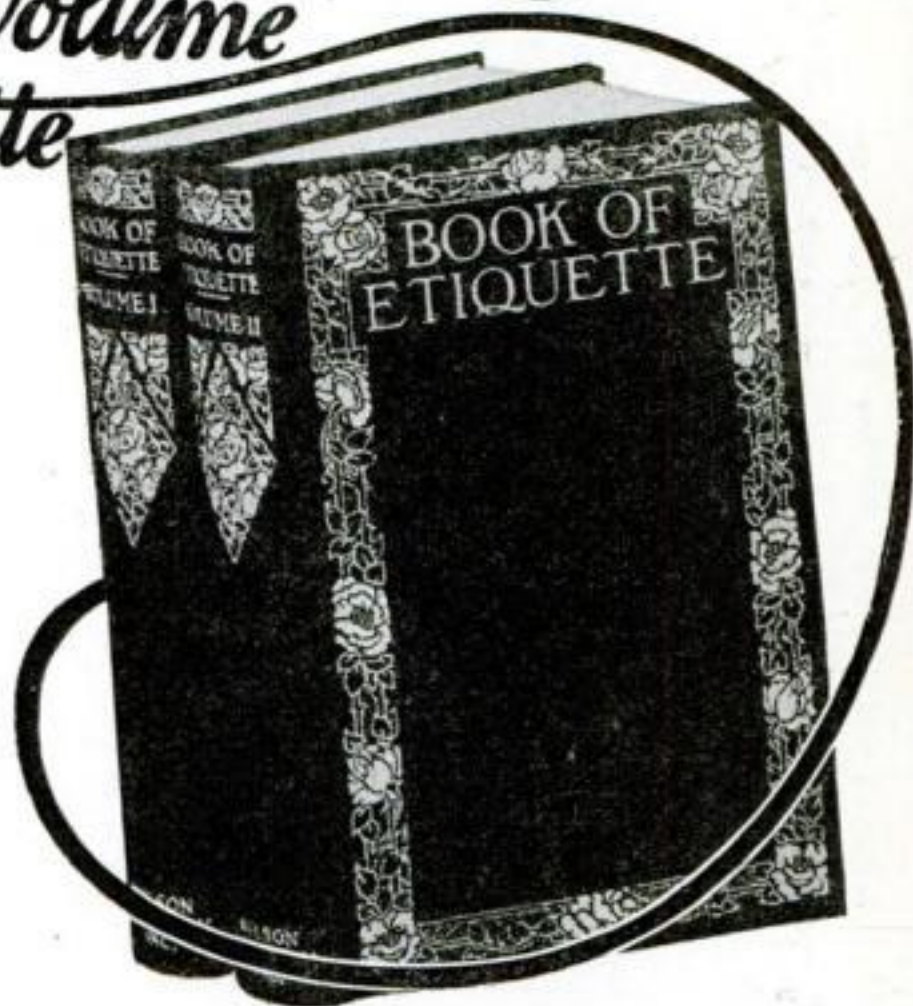

IF YOU are one of the 500,000 men and women who have purchased the Book of Etiquette, you will agree that it is a positive insurance against social blunders and sudden embarrassments. If you are not among those who have profited through the help of this famous set of books, you have surely heard about them and wanted them. But if you have intended to make these books your own, don't hesitate another day, for this wonderful bargain offer is made for you. If you act quickly, you can get your set of these famous books—not for \$3.50, which 500,000 people have gladly paid—but for only \$1.98 complete. And without a cent in advance!

Should She Invite Him In?

Countless little problems confront the man and woman who attend the theatre, dance, dinner or reception. It is so easy to make embarrassing blunders. This couple have just returned from a dance. Although it is late, the folks are still up. Should she invite him in or say good-night at the door? Should he ask permission to go into the house? Should she ask him to call again?



Are You Ever Tongue-tied at a Party?

Have you ever been seated next to a stranger at dinner and discovered there wasn't a thing to talk about? Have you ever found yourself tongue-tied—unable to say what you wanted to say, hesitant and embarrassed instead of well-poised, at ease and CONFIDENT?

Solves Every Social Problem

The famous two-volume Book of Etiquette is unquestionably the most authoritative, complete and helpful work of its kind. It covers every phase of wedding, street, dinner, dance and theatre etiquette. It contains valuable information for the self-conscious and timid; the bachelor, business woman and country hostess. It tells you the proper thing to do, say, write and wear on any and every occasion. It is a positive insurance against the numerous embarrassments that come so unexpectedly.

Why We Are Making This Special Offer

You are probably wondering why we are making this offer—why, when 500,000 people have gladly paid \$3.50 for the Book of Etiquette, we now offer it to you for only \$1.98. Here's the answer: Due to the enormous volume of books which we publish, it is necessary to maintain a staff of high-grade, capable men and women. Right now there is a lull in the publishing business. Yet it is necessary to keep our presses running and our employees busy. In doing that we are printing more books than are required to supply the demand. Therefore, we are compelled to increase this demand by making certain inducements. That is why we are now offering the Book of Etiquette for a short time only, at practically one-half the publisher's price. You can now get your set for \$1.98—if you act quickly.

SEND NO MONEY

You need not send a cent in advance in order to take advantage of this unusual bargain. Just mail the special coupon today. When the books arrive, pay the postman only \$1.98 (plus delivery charges) and the Book of Etiquette is yours. But act NOW if you want the benefit of this offer. The response will be great and we cannot afford to maintain such reduction for anything but a short time. Therefore, we urge you to order today. You take no risk—if you are not entirely satisfied, your money will be refunded. Nelson Doubleday, Inc., Dept. 2512, Garden City, New York.

Mail This Special Coupon

NELSON DOUBLEDAY, Inc.
Dept. 2512, Garden City, N. Y.

I accept your special, limited offer. Please send me the complete two-volume Book of Etiquette, regular price \$3.50. When the books arrive, I will pay the postman only \$1.98 (plus delivery charges), with the understanding that if I am not satisfied, I may return them in 5 days and get my money back.

Name.....

Street.....City.....State.....



Money Making Opportunities for "Popular Science" Readers

AUTOMOBILES AND ACCESSORIES

PATENTS—Write for our Guide Book, List of Patent Buyers and "Records of Invention Blank" before disclosing inventions. Send model or sketch of your invention for our free opinion of its patentable nature. Terms Reasonable. Victor J. Evans & Co., 189 Ninth, Washington, D. C.

AUTOMOBILE PARTS—Used parts for most any car at half factory list prices. Allen, Briscoe, Bulek, Cadillac, Chalmers, Chevrolet, Dodge, Ford, Grant, Hudson, Hupmobile, Oakland, Overland, Oldsmobile, Reo, Studebaker and many others. Send list of parts wanted. Maxwell Bros., 4106 Olive Street, St. Louis, Missouri.

AUTOMOBILE OWNERS, CARPENTERS, MECHANICS, send for free copy America's popular motor magazine. Contains helpful, money-saving articles on repairing, overhauling, ignition, carburetors, batteries, etc. Automobile Digest, 523 Butler Bldg., Cincinnati.

AGENTS—Extraordinary Automobile necessity: "Save Money Three Ways." Thousands "Sold." Everybody Satisfied. Permanent business. \$70.00 weekly. "Wizard," 998, Rochester, N. Y.

AVIATION

THE American School of Aviation announces a new correspondence course in mechanics of aviation. A thorough training in practical aeronautics. American School of Aviation, Dept. 174C, 3601 Michigan Ave., Chicago, Illinois.

PROPELLERS for aeroplanes propellers, 5-foot diameters, \$12; 6-foot for Ford, \$15; others in proportion. Motorcycle sleigh blueprints, 75c; Ford size, \$1.00. Pictures free. Crawford Motor and Aeroplane, Long Beach, Calif.

MOTORCYCLES, BICYCLES, SUPPLIES

DON'T buy a bicycle motor attachment until you get our catalogue and prices. Shaw Mfg. Co., Dept. 4, Galveston, Kansas.

DEALERS and riders: Attention! Write for our special motor cycle saving bulletins. Dealer's bulletin No. 8 and rider's bulletin No. 42. Motorcycle Parts Mfg. Co., 2030 Wabash Avenue, Chicago, Illinois.

USED motorcycles fully guaranteed like new, \$25 to \$100. Motorcycle tires, \$3. Auto tires, \$3. Bicycle tires, \$1. Bicycles, \$5; tandem, \$10. Disk Talking Machines, \$1. Records for all Talking Machines, 25c. Easy terms. Send stamps for catalogue. Bendner Price Cutter, Rochester, N. Y.

MODELS AND MODEL SUPPLIES

WE make working models for inventors and experimenters. All work, and carry a complete stock of brass, steel and metal supplies. Send for catalogue. The Pierce Model Works, 1000 Park, Illinois.

MODEL making and experimental work; modern shop, expert workmen. Manufacturing. Lanson M. & Mfg. Co., 625 W. Jackson, Chicago.

MODEL Making Supplies—2" 4" diameter, special thin brass tubing for Model Boilers, 10c-20c. per inch. Machined ends, per pair, 2", 75c; 4", \$1.50. Miniature machine screws, 3/32" up. Finished Boiler Fittings. Catalogue, 20c. Bothe Mfg. Co., Dept. C, 5214 Woodland Ave., Philadelphia, Pa.

MOTORS, ENGINES, MACHINERY

MOTORS—G. E., 1/2 H.P., \$15.00; 1/4 H.P., \$32.50; 1 H.P., \$62.50. Generators, 8 volt, 10 amp., \$15.00; 32 volt, 500 watt, \$30.00. Other sizes, low prices. Motor Specialties Co., Crafton, Pennsylvania.

USED auto engines excellent for power. We make 10 governors. P. C. Smith Governor Co., Springfield, N. Y.

MANUFACTURING

To order: Metal articles, simple, or complicate machinery. Models, tools, patterns. Experimenting. Parma Engineering Co., Brooklyn Station, Cleveland, O.

RADIO AND SUPPLIES

TESTED radio receipts. One Skinderviken transmitter button mixed with radio set gives amplification and loud speaking. Free literature. R. Electric Co., 15 Park Row, New York.

1500 MILE vacuum tube receiver \$21.50. Radio, 4416 Market, Philadelphia.

RADIO generators 500 V 100 W. \$28.50 each. Battery chargers \$12.40—High speed motors. Motor-Generator sets, all sizes. Motor Specialties Co., Crafton, Penn.

GENUINE Edison Elements (new) for making "B" Batteries, obtained from U. S. Government. A positive and negative element—6c; glass tube—3c; all other parts at reasonable prices. Postage, etc., 50c extra per order. Free instructions. Todd Electric Company, 109 West 23d Street, New York.

2000 MILE Range. Home made receiver. Hundred station log and hook-up free. Spencer Rosch, 2905 Columbia Ave., Philadelphia, Pa.

FORD ACCESSORIES

SPEEDSTER fans—see "Red-i-Kut" ad, page 126

LETTER SPECIALISTS

MY master sales letters, prepared to your order, will show big, profitable sales returns. Ad-Expert Mac Fee, 2731 Warren Avenue, Chicago.

Another \$25.00 IN PRIZES

To win one of these cash prizes is easy, and every reader is invited to enter this fascinating competition. Just write a letter of not over seventy words answering this question:—

What advertisement of "Money Making Opportunities" in this issue interests you most-and why?

Here are the prizes we will pay for the ten best letters answering the above question:—

First Prize.....\$10.00
Second Prize.....5.00
Third Prize.....3.00
And 7 Prizes
of \$1.00 each.....7.00

First read every one of the "Money Making Opportunity" advertisements on pages 8 to 24. Check the ones that interest you. Then read over the ones you have checked and decide on the one that interests you most.

Then write a short letter, *not more than seventy words*, telling us why the advertisement you pick interests you most. Remember that ten prizes will be awarded. You have a good chance of winning one of them. Be sure to mail us your answer before December 1st. The prizes will be awarded, in the order of their merit, for the letters that are most interesting and best expressed.

The names of all the prize winners and the letters that win the first two prizes will be printed in this column in the February issue. Address your prize letter to—

Contest Editor

POPULAR SCIENCE MONTHLY
225 West 39th Street, New York City
Last Month's Prize Winners

The First Prize of \$10.00 goes to W. P. Kaufman, 16 Decatur Street, Cumberland, Maryland, for his letter on the advertisement of the Denver Optic Company. Here is Mr. Kaufman's letter:—

Dear Sir:

The Classified ad that interested me the most was the ad of the Denver Optic Company, because I answered it; bought three eyes of them; saved \$15 on the deal, which represented more than \$1.00 a minute for the time I consumed in reading it, besides saving me a trip to the city to get fitted, or probably a \$50.00 saving by reading a Classified ad.
W. P. KAUFMAN.

Mr. E. M. Hoefel, 5427 Nottingham, St. Louis, Mo., wins the Second Prize for the following letter regarding the advertisement of Southampton Coin Exchange:

Dear Sir:

The "Money-making Opportunities" which interests me the most is my own ad—The Southampton Coin Exchange.

Why? Because it is the only ad in the entire magazine which is bringing me in some good ready cash; because already this first use by us of these columns has many times over paid for the advertisement and has made us invest in more goods to sell, helping thereby the other fellow.

E. M. HOEFEL.

The Third Prize goes to Mr. R. Clayton, Provo, Utah.

The winners of the other seven prizes are:—

Albert E. Lemay, Manchester, N. H.;
Lisbeth Ann Lewis, Lakeville, Conn.;
Clarence Miller, Kirksville, Mo.; K. L. Rao, Girgaum, Bombay, India; A. Turo, Astoria, L. I.; H. M. Sharpe, Spencer, Iowa; Mildred W. Mattern, Philadelphia, Pa.

Rate 25 Cents a Word. Advertisements intended for the February issue should be received by Dec. 5th

AMERICAN MADE TOYS

MANUFACTURERS on large scale, also homeworkers wanted to manufacture metal toys and novelties. Millions needed of barking dogs, wag tail pups, wild animals, automobiles, Indians, cowboys, baseball players, cannons, toy soldiers, crowing roosters, Statues of Liberty, miniature castings of capital, bathing girl souvenirs and others. Unlimited possibilities. Guaranteed casting forms furnished manufacturers at cost price from \$5.00 up, with complete outfit. No experience or tools necessary. Thousands made complete per hour. We buy goods all year and pay high price for finished goods. Cash on delivery. Contract orders placed with manufacturers. Catalog and information free. Correspondence invited only if you mean business. Metal Cast Products Co., 1696 Boston Road, New York.

ADVERTISING

ADVERTISE in 24 metropolitan dailies, 24 weeks, \$15.00. Helpful Guide listing 1000 publications, 4c stamps. Wade Company, Baltimore Bldg., Chicago.

ADVERTISING rates for magazines and weeklies free. Charles A. Lutz, Apartment 241, York, Pennsylvania.

25 WORDS—355 rural weeklies. \$14.20. Meyer Agency, 4112P Hartford, St. Louis.

1 INCH Display, 100 magazines, three \$5. Beck, 5109 Alaska, St. Louis.

DUPLICATING DEVICES

"MODERN" Duplicators save Time, Labor and Money. Gets business. Reproduces Typewritten or Pencil Letters, Drawings, Lessons, Music, Menus, Bills, Notices, Specifications, Maps or anything in one or more colors. Prints two per minute. Special sale on. 30 days' free trial, \$2.25 up. Booklet free. J. V. Durkin-Reeves Co., Pittsburgh, Pennsylvania.

STENCIL Duplicating Outfit for hand use. \$3.00. On Approval. Prints Typewriting—Handwriting. Primos Specialty Co., 3-N, Primos, Pa.

LABORATORY AND CHEMICAL

EXPERIMENTERS. Complete supplies for the chemical laboratory. Catalogue 5c. National Scientific Supply Co., 241 Pennsylvania Avenue, Washington, D. C.

YOUR chemical problem solved and working process furnished for five dollars. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Mass.

CHEMICAL Service. Formulas, analysis, methods, experiments. Jacob Shyster, Chemist, 2527 East St., Davenport, Iowa.

FORMULAS

FORMULA catalog free. C. A. Lutz, Apartment 241, York, Pennsylvania.

3000 FORMULAS—500 pages. \$1.00 postpaid. Hissale Laboratories, 14802-144 Cooper, Harvey, Ill.

FORMULAS furnished—All kinds—Household recipes, Beverages, Chemical Magic. Universal Laboratories, Newark, Delaware.

FOR THE HOME

GRANDFATHER clock works, \$5.00. Build your own case, instructions free; make good profits selling your friends. Clock works with chains for old or new cases. Write for full particulars. Clock Co., Nictown, Pennsylvania.

GASOLINE lamps, lanterns and heaters. Catalog free. Little Wonder Mfg. Co., Terre Haute, Ind.

WANTED

DETECTIVES—Excellent opportunity. Fascinating work. Experience unnecessary. Particulars free. Write American Detective System, 1968 Broadway, New York.

TYPISTS—Earn \$25-\$100 weekly in spare time copying authors' manuscripts. Write R. J. Carney, P-1, Tallapoosa, Georgia, for particulars.

MEN! Write Me! A 14 disk tempered steel knife sharpener, practical, permanent and durable, sent to you for \$1.00. Guaranteed 10 years. Particulars Free. Reference, Trevitt Maiths Banking Company, A. C. Conway, Dept. (H), Champaign, Ill.

CASH for old gold, silver, platinum, watches, diamonds, magneto points, gold crowns, false teeth, and other valuables. Merchandise returned if offer unsatisfactory. Busch Products, Dept. 55, 144 Fifth Ave., New York.

TRADE SCHOOLS


PAINT Automobiles, Trim Automobiles. Become a certified Electrician. We fit you for a big money job. Make you an expert, able to step right into a position paying \$45 to \$100 per week. We secure you a job while training that more than returns tuition costs and expenses. Come to Detroit, the Automobile Hub; the World's wonder City. Write today. Standard Trades Schools, 416 Woodward Avenue, Detroit, Mich.

CIGARS AND CIGARETTES

CIGARS, save 75%, make your own. We teach you. Universal Cigar Co., 19 Library St., Grand Rapids, Mich.

**More Money Making Opportunities
on pages 10 to 24**

L
E
A
R
N

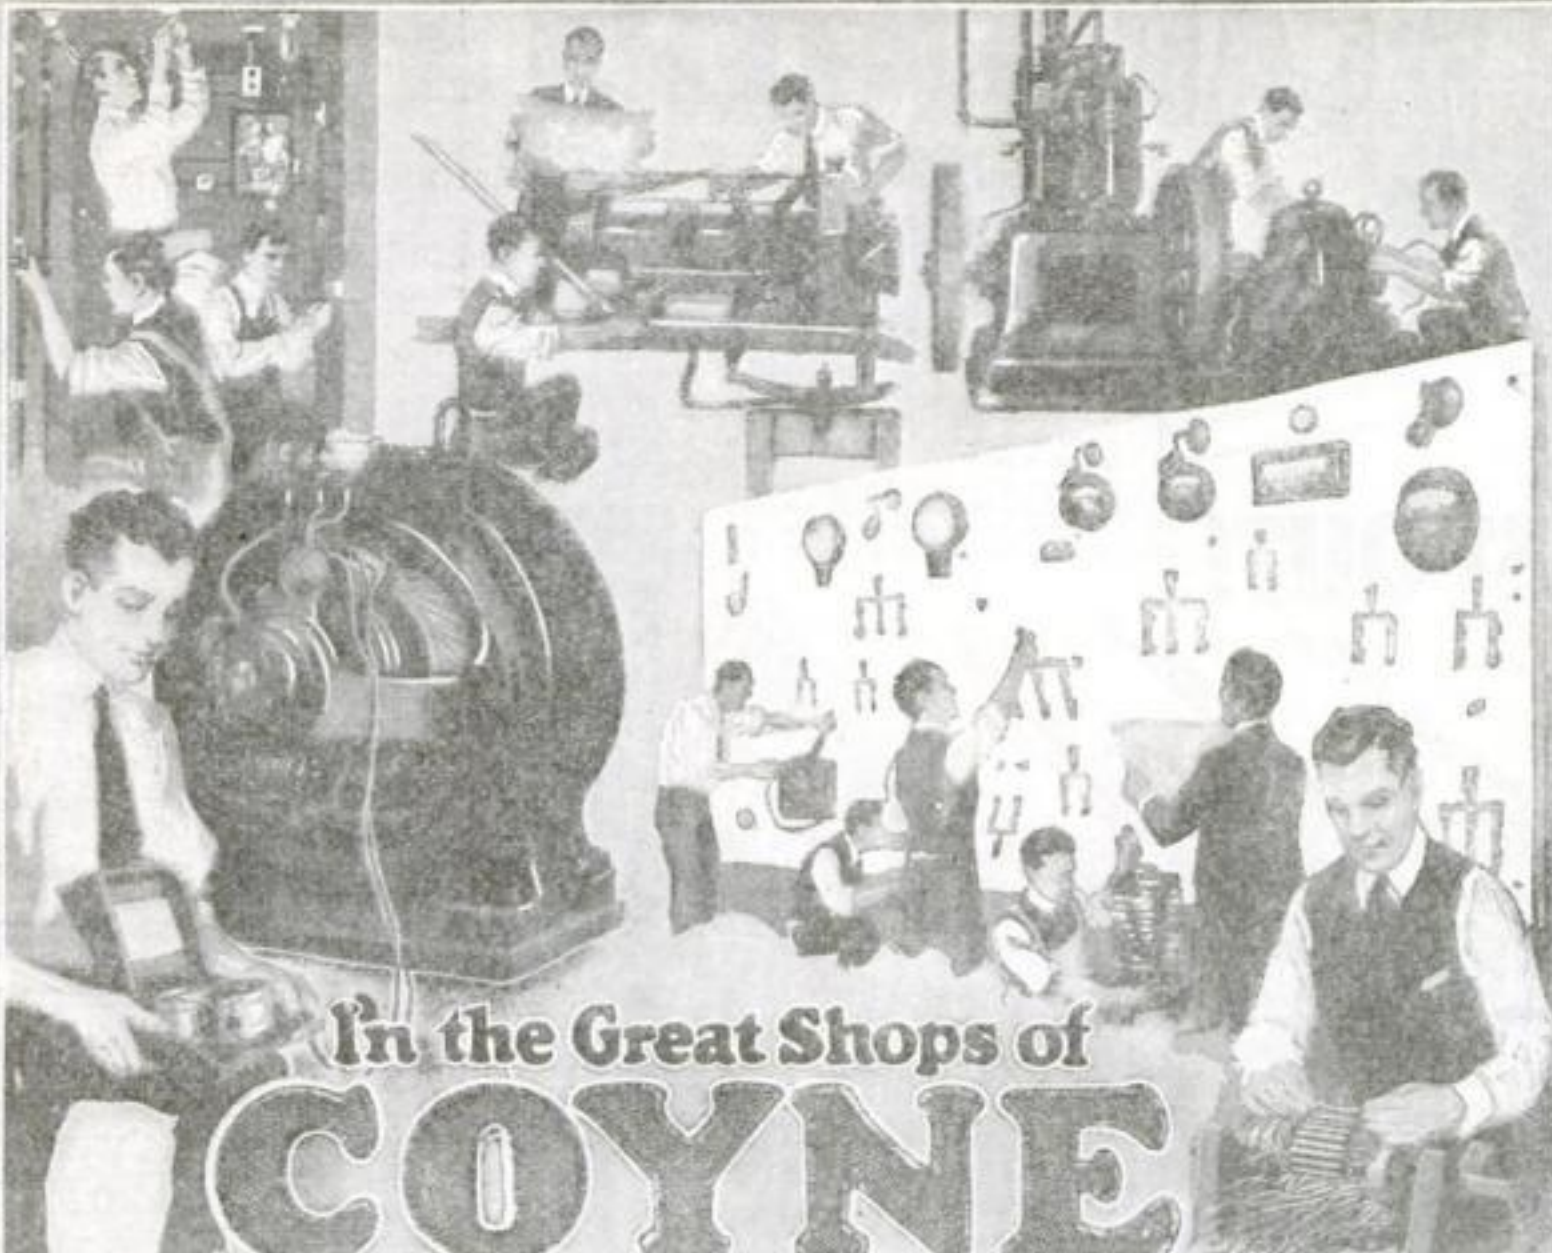

In the Great Shops of

COYNE

E
L
E
C
T
R
I
C
I
T
Y

Be An Electrical Expert

THE whole world of electricity is open to the Coyne trained Electrical Expert. Come to Chicago—the Electrical Center of the World. Get your training at Coyne—the oldest, largest and best school of practical electricity in the country—the only school endorsed by the Electrical Industry. Coyne trains you in all branches of electricity. We do not offer a number of individual courses—we give you just one **Complete** course so that you will be an **Electrical Expert** capable of commanding big pay. Let ordinary electricians do the small jobs. You can become an **Expert** and get the big money in any branch of electricity if you seize this chance to come to Coyne. Opportunities for **Experts** are unlimited. Get started now!

You Work on \$200,000 Worth of Electrical Equipment

No books or useless theory. You are trained on \$200,000 worth of electrical equipment in 3½ months (stay longer if you wish). Every thing from door bells to power plants. You work on Circuits, Housewiring, D. C., A. C., Armature and Stator Winding, Drafting, Auto, Truck and Tractor Electricity, Battery Building and Repairing and Radio—everything to make you an expert ready to step right into a position paying from \$50 to \$125 a week.

Coyne Trains You for Life

We furnish every student with a Life Scholarship which enables you to stay as long as you want or come back for further training at any time without charge. We also assist students to good paying positions after graduation.

We give you free a course in Radio—the marvel of the age. Constructing, installing and operating. You can build your own radio receiving set.

Hundreds of Coyne graduates are making big money as Electrical Experts. You can do the same if you get started at once. The electrical industry is crying for **EXPERTS**—don't pass up a chance to train yourself for one of these big paying jobs.

Earn while you learn! We help students to secure jobs to earn a good part of their expenses while learning

Send this Coupon Now

Send this coupon now. Determine today that you are going to become a part of the world's greatest force—electricity. Assure your future by sending this coupon now. It brings you full information. Think of it—if you send the coupon today, you can be fully equipped for a fine paying electrical job in a few months. Send coupon now before the special offer we are making is withdrawn.

COYNE
Electrical School

Endorsed by Electrical Industry

1300-1319 W. Harrison St.,

Dept. 13-69


Chicago, Ill.

Coyne Electrical School,
1300-1319 W. Harrison Street,
Dept. 13-69 Chicago, Illinois

Gentlemen: Please send me free your big catalog and full information about your 3½ month's practical training and special offer.

Name.....

Address.....

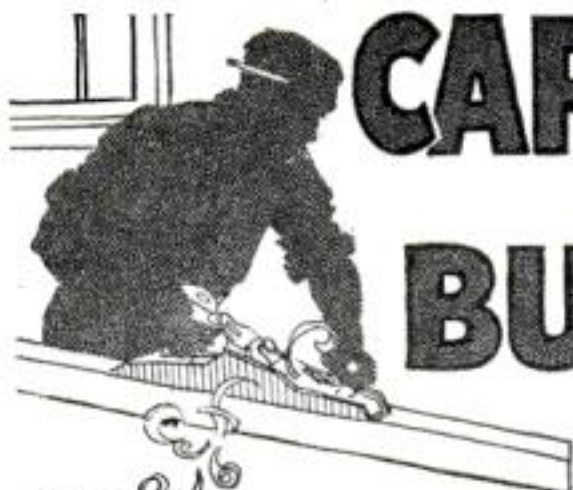


CARPENTERS AND BUILDERS!

Just available — Audel's Carpenters and Builders Guides—the short cut, professional information you want.

A Guide that keeps you in close touch with your work and shows you how you may increase your earning power.

No need to guess or take chances. Every day you have before you in this set, exact, practical, useful information to help you with your daily work.

JUST OUT!

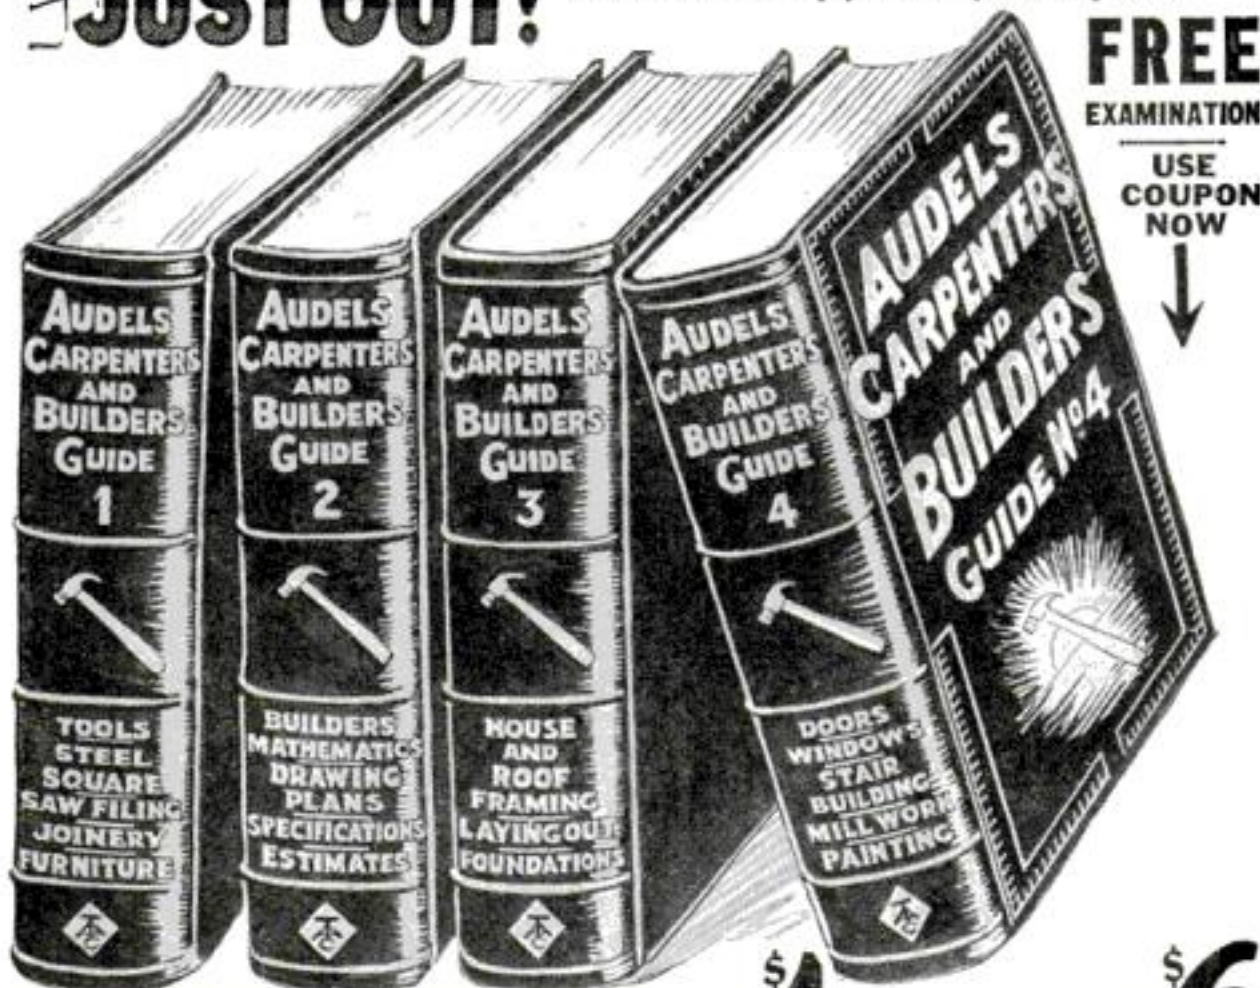

POCKET SIZE-FLEXIBLE COVERS

There are thousands of examples of modern construction and building work—new methods, new ideas, proved efficiency plans, short cuts, time saving suggestions, new ways that cover the entire theory and practice of modern carpentry. Every point is easy to read and

understand and clearly illustrated with sketches and forms. Decide for yourself whether they are worth the money to you. Pay only \$1 a month if you like them.

Return the Guides if you don't. **USE COUPON NOW!**

HOW To Handle the Job That Puzzles YOU

How to use the different kinds of wood—complete detailed information on nails and screws—how to use the steel square—how to file and set saws—how to make wood joints—how to build furniture—how to make a mitre shooting board—how to plumb, and level work—how to lay out work—how

to understand carpenter's arithmetic—how to solve mensuration problems—how to estimate the strength of timbers—how to proportion beams—how to read plans—how to draw up specifications—how to estimate the cost of buildings—how to build houses, barns, garages, bungalows, etc.—how to build foundations—how to proportion foundation footings—how to frame houses—how to set girders and sills—how to frame joists—

how to frame a studding—how to set window frames—how to cut rafters—how to use the settings 12, 13, and 17 on the steel square—how to put on wood, fibre and metal shingles—how to hang doors—how to frame windows—how to put on sheathing—how to put on exterior trim—how to do cornice work—how to build stairs—how to lay floors—how to paint.

FREE EXAMINATION

Not a cent to pay until you see the books. No obligation to pay unless you are satisfied. Send coupon now—today and

get this fine, helpful new set for Carpenters and Builders. After you have looked them over 5 days send only \$1, then \$1 a month until \$6 is paid—if you want to keep them. Return them if you do not.

THEO. AUDEL & CO., 72 Fifth Avenue, New York City.

Please submit me for approval and free examination:—
AUDEL'S CARPENTERS AND BUILDERS GUIDES

Ship at once, prepaid, the 4 numbers. If satisfactory I agree to send you \$1 within five days and to further mail you \$1 monthly until \$6 is paid.

Name

Address

Employed by Reference

SEND NO MONEY

SEND THIS COUPON ONLY



Money Making Opportunities

PRINTING, ENGRAVING, MULTIGRAPHING

BETTER printing for less money! Send for our large package of samples of hundreds of items every user of printing is interested in. These samples worth dollars will be sent for 10 cents to pay postage. Ernest Fantus Company, 525 South Dearborn Street, Chicago.

EMBOSSED business, personal stationery. Samples, stamp. Daniels P. Company, Pittston, Pennsylvania.

225 BOND letterheads, envelopes, billheads, cards, \$1.25 each. Combination, \$4. Economic Printery, Leonia, New Jersey.

LETTERHEADS, envelopes, 500, \$2.65. Samples free. Quality Printery, Marietta, Ohio.

QUALITY Printing 1,000 letter heads, envelopes, cards or statements, \$3.00. Your name on 200 note sheets and 100 envelopes, \$1.00. Samples Free. Howlett's Paris, Ill.

LETTERHEADS, envelopes, 500, \$2.65. Samples free. MacDonald Printery, Marietta, Ohio.

500 EACH Hammermill bond letterheads, envelopes, \$4.50. Multigraphed letters \$4.25 thousand, delivered. Anderson, 205 N. Church, Rockymount, N. C.

EVERYTHING Printed. Samples free. Franklin Press, B-34, Milford, New Hampshire.

CARDS printed, business or visiting, 50c per 100. C. O. D. postpaid. McMath Press, 405 East Seventh Street, Newport, Kentucky.

500 TWO Color Letterheads, \$2.75. Samples free. Superior, 1825 Roosevelt, Indianapolis.

ADDING MACHINES

FREE trial, marvelous free adding machine. Adds, subtracts, multiplies, divides, automatically. Work equals \$350.00 machine. Price only \$15.00. Speedy, durable, handsome. Five-year guarantee. Used by largest corporations. Write today for catalog and free trial offer. Lightning Calculator Co., Dept. O, Grand Rapids, Michigan.

TYPEWRITERS

ALL makes, rebuilt, refinished and guaranteed ten years. \$15.00 up shipped privilege 30 days' time. Get our prices and agents proposition. Typewriter Manufacturers Exchange, Fordham, New York.

EDUCATIONAL AND INSTRUCTION

500 "FREE Tuition Scholarships" to be granted to first applicants. Normal, high school, collegiate, and business courses thoroughly taught by mail. Apply Carnegie College, Rogers, Ohio.

DOUBLE entry bookkeeping mastered in 60 hours; guaranteed; diploma. International Bookkeeping Institute, Springfield, Missouri, Desk 10.

LINCOLN-JEFFERSON University. Home Study in Academy College, Theological, Law, Music, Pharmacy. Business and Graduate schools, leading to degrees. Box G, 64 W. Randolph Street, Chicago.

HYPNOTISM easily learned. Lessons guaranteed. Postpaid \$1.10. Smith Publishing Co., Springfield, Mass.

SHORTHAND in 100 hours. Most rapid readable system. Introductory booklet free. Manuscript Institute, Roanoke, Virginia.

PERSPECTIVE drawing made easy. Fuller Simplified System makes beginners and junior draftsmen expert overnight. Send stamp for particulars. Earl Fuller, 602 Gumble Bldg., Kansas City, Mo.

USED correspondence courses bought and sold. Bargain catalogue 1000 courses free. Students' Exchange, Dept. 3, 47 West 42d Street, New York.

ARITHMETIC lessons by mail at small cost. Burket, Roosevelt Ave., Roaring Spring, Pa.

JUST out! "How to Be a Traveling Salesman." Learn to travel and make big money—25c. Chillicothe Publishing Co., Chillicothe, Ohio.

CORRESPONDENCE Courses sold complete 1/3 usual prices because slightly used; easy terms; money back guarantee. All schools and subjects. Write for special Free catalog. Courses bought for cash. Economy Educator Service, F202 West 49th Street, New York.

MAIL ORDER BUSINESS

\$50 a week, evenings. I made it. Mail order business, booklet for stamp tells how. Sample and plan 25c. Free, 12 articles worth \$3. Alps Scott, Cohoes, New York.

YOUR opportunity. Start a mail order business on 25c capital. Complete details, 25c cash. Newton Specialty Co., Box B54, Newtonville, Mass.

DOGS AND PETS

AIREDALES that I breed people appreciate. Dr. Knox, Danbury, Connecticut.

200 VARIETIES, Dogs and Pet Stock. Catalog 10 cents. Violet Hill Kennels, York, Pa.

HIGH Class Fox, Wolf, Deer, Coon hounds. A few still trailing coon and varmint dogs. Rabbit hounds. Stephens Kennels, Marshall, Ark.

POULTRY

FOUR new money making fowls, Spencer Turken, Russian Orloff, Jersey Giants and New Zealand Kiwis. Complete information free. Spencer, Route 1, Santa Cruz, Calif.

POULTRY Feeder. New principles. No waste. Sanitary. Booklet and Mash Formula Free. L. Kelly, Saranac, Michigan.

ROOTS AND HERBS

GINSENG and other Plants for Medicine, Perfume, Dyes. How to gather. Buyer's Addresses. Book 30 cents. O. Twitchell, Berlin, N. H.

More Money Making Opportunities
on pages 8 to 24

\$90 Drafting Course FREE

There is such an urgent demand for practical, trained Draftsmen that I am making this special offer in order to enable deserving, ambitious and bright men to get into this line of work. I will teach you to become a Draftsman and Designer until you are **Drawing a salary of \$250.00 a month.** You need not pay me for my personal instruction or for the complete set of instruments. **But you must take advantage of this special offer at once.**

\$300 a Month Salary— \$450 on the Side at Home!



Chief Draftsman Dobe

That's the kind of money my drafting students make. Read what this one says:

"As a beginner I am doing fine. Am earning a salary of \$300 per month, besides I made over \$450 at home the last two months, drawing plans for private parties. The practical drafting training you gave me by mail put me where I am in less than six month's study. Thank you for all your personal interest and help you gave me so far."

(Signed) J. B.

(Name and address upon request)

I Guarantee

*To Train You Until You Are
Placed in a Position Paying
up to \$250 and \$300 a Month*


Write and I'll tell you how I make you a first-class, big-money-earning draftsman in a very few months! I do this by a method no other man nor institution can imitate. I give you personal training at home by mail until you are actually placed in a position paying up to \$250 and \$300 a month. Six thousand draftsmen are wanted every month.

Free Book

Send Coupon Today

No matter what plans you have for the future. Get this great book—"Successful Draftsmanship." Find out about the simply marvelous opportunities ahead now. How the world needs draftsmen, engineers, architects and builders. What great salaries and possibilities there are! Send coupon for free book today.

Chief Draftsman, Engineers Equipment Co.
1951 Lawrence Ave. Div. 13-69 Chicago, Ill.

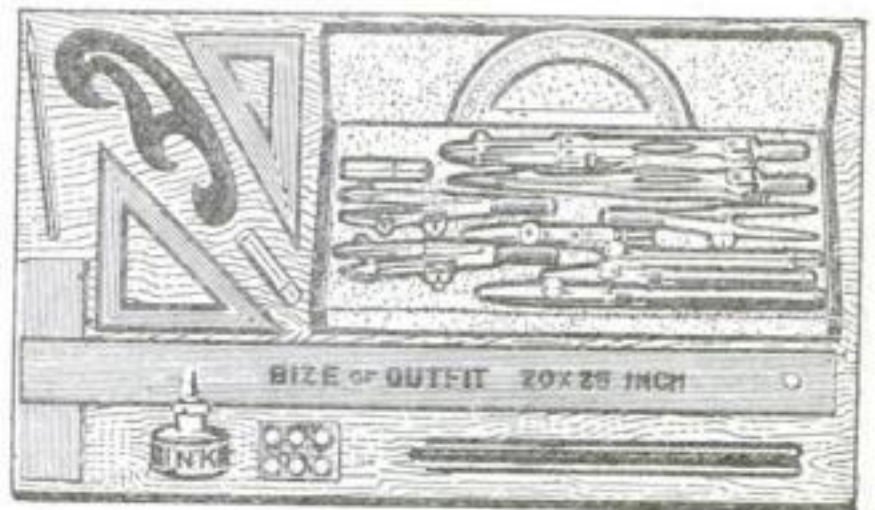

THIS OUTFIT FREE

And more—I give you a whole set of drafting tools the minute you become my student. You get every tool you need. A magnificent set of instruments which will build your success in draftsmanship.


Chief Draftsman, Engineers Equipment Co.
1951 Lawrence Ave. Div. 13-69 Chicago, Ill.

Without any obligation whatsoever, please mail your book, "Successful Draftsmanship", and full particulars of your liberal "Personal Instruction" offer to few students.

Name.....

Address.....

Post Office.....State.....

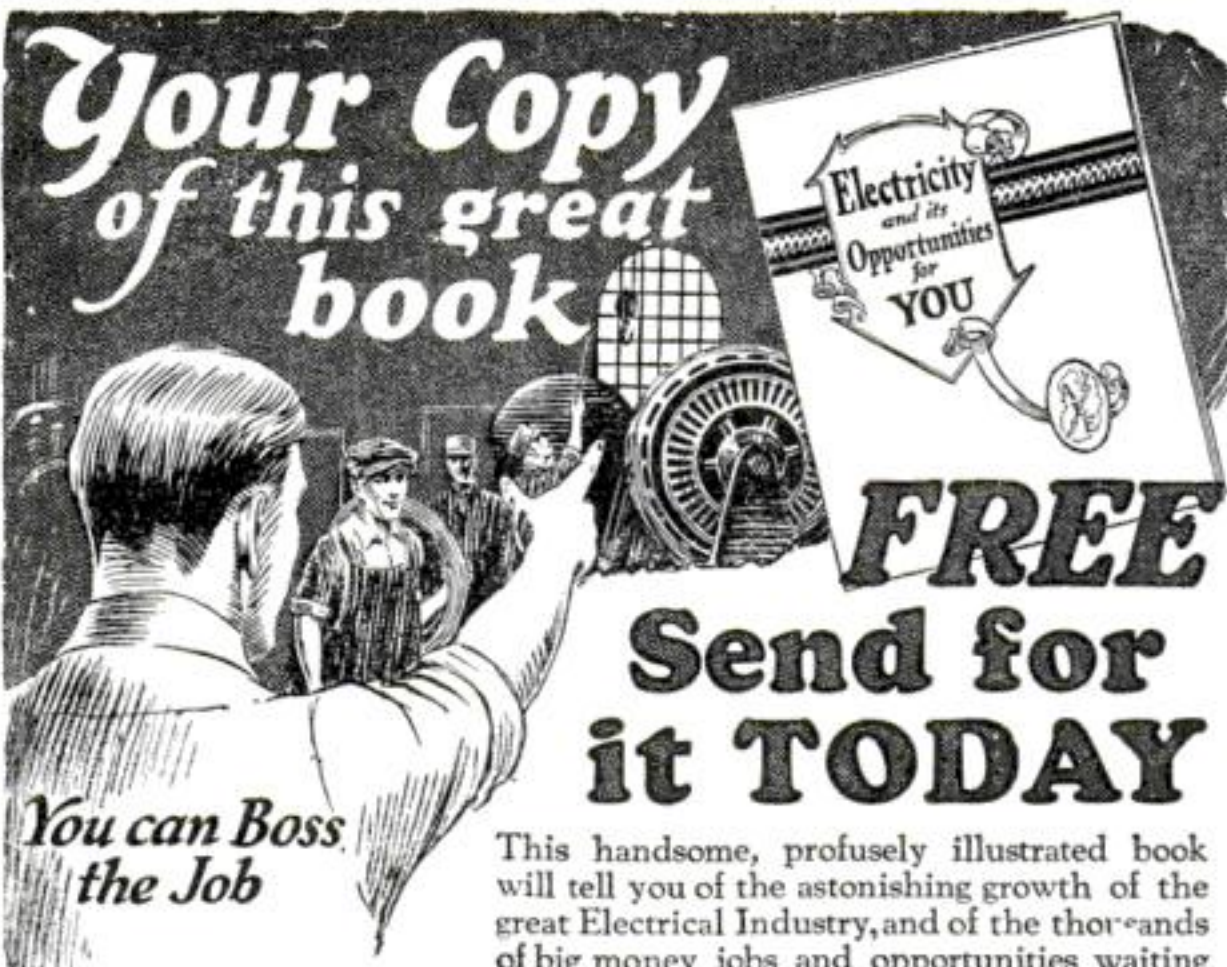

Your Copy of this great book

FREE

Send for it TODAY

You can Boss the Job

Mark These 9 Feature Points of A.E.E. Service

- 1 Life Membership in the Associated Electrical Engineers
- 2 Our exclusive and copyrighted method of training
- 3 Unlimited Placement Service throughout your career
- 4 Unlimited Consultation Service
- 5 A wonderful Laboratory and Experimental Outfit
- 6 A Complete Course in Automotive Electricity
- 7 A Complete Course in Radio
- 8 A Complete Course in Business for the Electrical Expert
- 9 A Legally Binding Guarantee of Satisfaction



This is the mark of the Associated Electrical Engineers Follow it to SUCCESS!

This handsome, profusely illustrated book will tell you of the astonishing growth of the great Electrical Industry, and of the thousands of big money jobs and opportunities waiting for trained men.

More important, it will tell you of the great Associated Electrical Engineers—chartered by the State of Illinois, as an institution for the advancement of every phase of Electrical Science. Not a mere school, but a great National Organization of Electrical Experts and Specialists, who have developed the MOST REMARKABLE SYSTEM ON EARTH for HOME TRAINING IN ELECTRICITY.

We Train You at Home

in your spare time, quickly and surely, by our EXCLUSIVE AND COPYRIGHTED METHOD to qualify to

Earn \$75 to \$200 a Week

as an Electrical Expert or in business for yourself—and

We Help You "Cash In"

through our Placement Department and our great FREE BUSINESS COURSE, which will show you how to get the big-money Electrical jobs and how to establish your own independent, profitable Electrical business.

Our Book Tells the Story

Our BIG 64-PAGE ILLUSTRATED BOOK will tell you fully about every one of the 9 remarkable features of Associated Electrical Engineers Service, and how they will be the stepping stones for you from futureless, low-pay jobs up into the limitless, big-money opportunities in Electricity.

You Have Education Enough

If you have the AMBITION to succeed and make big money as an Electrical Expert, we will guarantee the rest.

Mail the Coupon NOW

Get this remarkable book. It is FREE. You will incur no obligation in asking for it. We want every ambitious man in America to have one and receive this great message. Your copy is ready. Send for it TODAY.

ASSOCIATED ELECTRICAL ENGINEERS
Dept. B-2, 537 South Dearborn Street, CHICAGO, ILL.

Here's Opportunity's Wide Open Door

Associated Electrical Engineers
Department B-2,
537 South Dearborn Street, Chicago, Ill.

Without obligation, send me your 64-page illustrated book on Electricity, together with full details of your remarkable plan of home training and membership in the A.E.E.

Name

Address

Associated Electrical Engineers OF AMERICA

Money Making Opportunities

BOOKS, PERIODICALS

"LIGHTS, Colors, Tones and Nature's Finer Forces," including vibrations; odic auras; cold-lights; radio; inventions; illustrated; 270 pages, \$2.00. Circulars free. Stevens Science Publishers, 242 Powell St., San Francisco.

HYPNOTISM Astonous, controls others. Wants gratified. 25 easy lessons, \$1.10. "Mindreading" (any distance). Wonderful, \$1.10. Popular Institute, PS 1014, Belmont, Chicago.

ENJOY health thru right eating. Literature free. Eutropheon, 1910 N. Harding Ave., Chicago, Ill.

DISEASES and their innate healer, 50c. Arthur Stevens, Wauseon, Ohio.

CHEMICAL Wonders, Secrets, and Mysteries, and Wireless Telegraphy fully explained. 20c each. P. S. Collins Co., 197 Fulton Street, Brooklyn, N. Y.

NEW and original magic. Massey. 205 pages, 28 page plates, \$3.15 postpaid. Spon & Chamberlain, 122C Liberty Street, New York.

PERSONAL Service Sales Guide, 10c. F. Glaeser, 660 Rutherford Avenue, Trenton, N. J.

PLEASE order my book, "Theology and Creation vs. Evolution and Darwinism," right now for the holidays. Price \$1.00 postpaid. Stephen O. Bryant, Bethany, Missouri.

PLAYS AND ENTERTAINMENTS

EVERYTHING Magical. Trick and Catalogs 20c. Gilmaglio, Morgan Park, Ill.

PLAYS, monologues, sketches, acts, written for amateur and professional purposes; low prices. Hoosier Play Company, 202 Fair Building, Indianapolis, Indiana.

YOU'LL have lots of fun exchanging cheery letters in my club. Eva Moore, Box 908, Jacksonville, Florida. (Stamp.)

EXCHANGE interesting letters with new friends. Dolly Jay Club, Box 186J, Denver, Colorado.

PLAYS, musical comedies and revues, minstrel music, blackface skits, vaudeville acts, monologs, dialogues, recitations, entertainments, musical readings, stage handbooks, make-up goods. Big catalog free. T. S. Denison & Co., 623 So. Wabash, Dept. 26, Chicago.

AUTHORS—MANUSCRIPTS

WRITE: for newspapers and magazines. Big pay. Experience unnecessary, details free. Press Reporting Syndicate, 400, St. Louis.

WRITERS—Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Missouri.

FREE to writers—a wonderful little book of money-making hints, suggestions, ideas; the A B C of successful story and play-writing. Absolutely free. Just address Authors' Press, Dept. 15, Auburn, New York.

\$\$\$ FOR ideas. Photoplay plots accepted any form, revised, criticized, copyrighted, marketed. Advice free. Universal Scenario Corporation 214 Security Bldg., Santa Monica and Western Avenue, Hollywood, California.

BIG money in writing photoplays, short stories, poems, songs, etc. Send today for free copy America's greatest magazine for writers. Filled with practical help in writing and selling. Writers' Digest, 636 Butler Building, Cincinnati, Ohio.

MISCELLANEOUS

ALL wool knitting yarns for sale from manufacturer, 95c and up per lb. Golf and plain socks. Free samples. H. A. Bartlett, Harmony, Maine.

JOIN the old reliable card club. Membership 10c. Riverside Club, Dept. 5, Frederick, Maryland.

HOMEOPATHIC and Biochemic preparations sent postpaid to all parts of the world. Manual and booklets free. Halsey Bros. Co., 111 N. Wabash Ave., Chicago, Illinois. Established 1855.

BRITISH girls desire American correspondents. Proposition 10c. Clack, 16 Cambridge St., London, S. W., England.

CREATE international friendships. Free information. Write: "Universalist," 1034-A West Eighteenth Street, Chicago, Illinois.

OLD reliable, most successful matrimonial club in the west. P. O. Box 21, Tacoma, Washington.

MAKE interesting new friends through jolly letters. Betty Lee, Inc., 4254 Broadway, New York City. Stamp appreciated.

LONESOME—Join our club—make acquaintances everywhere. Big illustrated book with descriptions and photos, sent in plain wrapper for ten cents. Bonafide Co., Dept. 43, Kansas City, Missouri.

FOR MEN AND WOMEN

"SEXUAL philosophy," 12c. Clear, specific authoritative, complete, best, satisfies. Fred B. Kaessmann, Lawrence, Massachusetts.

GENUINE Indian baskets, blankets and wampum—wholesale, catalogue. Gilham, Kelseyville, California.

MAGIC words! Secret, sure method of obtaining anything you want. Postpaid for dime. Lida Smedley, 145 Miller, Brooklyn, New York.

TOBACCO or Snuff Habit cured or no pay. \$1.00 if cured. Remedy sent on trial. Superba Co., N-5, Baltimore, Maryland.

DETECTIVES—Work home or travel. Experience unnecessary. Write American Detective System, 1968P Broadway, New York.

A CERTIFICATE for \$10.02 Free. For particulars write Orient Supply Co., North Troy, N. Y.

"HAGERMATH." Numerologist and specialist in solving personal problems. Vocational advising. P. O. Box 16, Station Y, New York City.

FURS

YOUR raw furs made up into beautiful garments. Enormous savings. Catalog Free. Arthur Felber Fur Co., 25 N. Dearborn St., Dept. P-8, Chicago, Ill.

More Money Making Opportunities on pages 8 to 24

How to Invent— What to Invent and What to Do About Protecting and Selling An Invention

ALTHOUGH the fact has been universally recognized that Invention is governed by a few simple, easily acquired, fundamental principles, no one ever thought of putting these principles in black and white so that everybody interested in invention could read them. In spite of the fact that Thomas A. Edison made his famous statement that invention should be taught as a science, thousands of people continued to work blindly, doggedly, haphazardly to perfect their ideas.

But now anyone can learn how to invent. Fifteen famous inventors have at last given to the world the laws and principles of Inventive Science. They have shown every ambitious man and woman how to invent. They are teaching Invention exactly as other people are teaching law, medicine, bookkeeping. Instead of spending years groping blindly, instead of wasting your time in useless, heartbreaking drudgery, you learn how to complete your ideas quickly *and what to do about them* when they are completed. You learn how to think so you are sure to succeed.

Everybody Invents

For a long time it was commonly believed that every invention was a matter of pure luck—the result of some happy inspiration that suddenly flashed through a man's brain, and which made him fabulously rich without the slightest effort or thought. But you can prove for yourself that this is not so. You can prove for yourself that invention is the result of thinking and action along definitely exact, scientific lines.

Suppose when you went home tonight, you found a window rattling. Through your mind would flash, almost instinctively, a regular order of thoughts which characterize the conception and completion of every invention the world has ever known. First, you would recognize a problem to be solved—the rattling of the window. Then you would think of several principles of science or mechanics which would solve your problem. You might think of the scientific fact that if you poured water on the frame the wood would swell and tighten the window. You might think of using a nail. But what you most probably would do would be to use the oldest mechanical principle known to man, the wedge.

What Invention Is

Brought down to its simplest terms, that is exactly the way every invention has been made—combining two ideas; a problem

—How to develop your imagination
—How to develop your ideas
—How to get the facts you need for inventions
—How to keep legal records of ideas
—How to use scientific principles of mechanics
—How to avoid wasting time on impractical inventions
—How to apply for a patent
—How to organize a company
—How to protect your rights
—How to market a patent
and hundreds of other vitally important facts which EVERY successful inventor knows and uses.

which must be solved and a fact of mechanics or science which solves the problem. So, although you may never have thought of it in just this way every time you solve a problem in your daily life—at home, traveling, or in business—you are an inventor; you use the principles of thought and action which govern the Science of Invention!

You can see, therefore, how easy it is for you to develop your natural instinct to "fix things." The same processes of thought that almost instinctively told you to fix a rattling window with a wedge can be so well developed that you can learn to invent other things almost as easily and quickly. You know, too, that every invention is made only by thinking inventively. And every inventor is agreed that the principles of Inventive Science are so simple, so easy to learn that anyone,

regardless of training or education, can develop himself to become a successful inventor!

With every new advance, with every new discovery that the world experiences, more problems are coming up—and more inventions are needed to solve these problems. Now, as never before, are new inventions wanted, and the world will pay a fortune to the man or woman who gives it just one of the inventions it needs.

Even little ideas can bring you a fortune. Eberhard, who invented the rubber on the end of a pencil, has been paid hundreds of thousands of dollars for his simple idea. The man who invented the metal tip for shoelaces, the man who conceived the idea of the "humped" hairpin, the man who developed the metal tape measure, all have achieved success and wealth as great or greater than the inventors of large machinery.

Learn How to Invent at Home

If you would like to develop your natural inventive ability along *money-making* lines, instead of trifling with ideas—if you would like to DO something about your

ideas instead of letting someone else patent and market them ahead of you, let this great Course in Inventive Science help you. Get the advice and the help of the fifteen famous inventors who tell you the secrets of invention which you MUST know to be successful.

This is the first course in practical invention that has ever been devised. In simple, easy-to-understand language you are told how successful inventors work; you learn how to think along inventive lines, you learn the short-cuts to successful invention; you learn how to use the secrets of invention that convert a simple little idea into money.

No one step in invention has been omitted. Everything you want to know about invention—developing your ideas, securing information you need, how to apply for patents, how to protect your rights, how to sell your invention—are taken up step by step, so that when you have completed the course you have a wealth of information worth thousands upon thousands of dollars.

FREE—New Book on Inventive Science

A wonderful new book has just come from the press that tells you all about the Science of Invention. It tells you how to avoid the pitfalls that have brought failure to thousands of would-be inventors. It tells you how to learn the secrets of practical invention, which famous inventors discovered only after years of heart-breaking effort and discouraging mistakes, and it tells you how to do this in only fifteen minutes of your spare time each day. This fascinating book will be sent to all those who are genuinely interested. Get the advice of those fifteen famous inventors. Let them tell you how you can easily learn the secrets of successful invention. Send for this Book today as only a limited number are available for free distribution. Send the coupon below NOW, or a letter or postal card will do. There is no cost or obligation. This bureau is not connected in any way with patent attorneys or manufacturers. Our only work is to help ambitious men and women to develop their inventive ability—to become successful inventors.

Bureau of Inventive Science
Dept. 712, Wisner Building, Rochester, N.Y.

BUREAU OF INVENTIVE SCIENCE
Dept. 712, Wisner Building
Rochester, New York

Please send me your free book, "The Science of Invention."

Name.....Age.....

Address.....

City.....State.....



Raymond F. Yates, seen with fourteen other famous inventors, now makes it easy for you to learn how to invent in your spare time at home.

Learn Cartooning at Home

Earn \$100 a Week

In This Fascinating Business

CASH in on the amazing ever-increasing popularity of cartoons! Thousands of cartoonists are needed to draw the vast number of political, religious, international, seasonal and human-interest cartoons. There is a crying demand too for men able to produce humorous cartoons, comic strips, and sport cartoons. Advertising and animated cartooning offer two wonderful new and almost untouched fields. Never before have the opportunities in cartooning been so many or so varied. Never have cartoonists had such a wonderful chance to make big money. Now indeed is the time to study cartooning!

New Method Makes Cartooning Easy to Learn

Regardless of how little ability you have in drawing, you can now easily qualify for this attractive highly-paid business. Through a wonderful new method you can learn right at home in your spare time. Learning this way is more than easy—it is actually as fascinating as a game.

First you learn the important fundamental principles of cartoon-making. Then you learn the little secrets of originating ideas of action, exaggeration, and expression—the little tricks which make cartooning easy for those who know them. Step by step

you advance through every branch of cartooning until almost before you realize it you are drawing cartoons that **SELL**. Many of our students have sold enough work while studying to pay for the course many times over.

Just think of earning a splendid salary for such pleasant work. Successful cartoonists earn from \$3,000 to over \$100,000 a year. Yet enough cartoonists cannot be found to meet the tremendous demand. Right now there is a wonderful opportunity for you in this fast-growing uncrowded field.

Send for FREE BOOK

WASHINGTON SCHOOL OF CARTOONING
Room 2412, 1113-15th St., N. W., Washington, D. C.

Please send me without obligation your illustrated booklet on cartooning.

Name.....
(Print Name Plainly)

Address.....

City.....State.....

If under 16 years, please give age.....

Find out more about the wonderful opportunities open to you in this attractive field. Learn more about this easy home-study method of learning cartooning. A handsome booklet has just been prepared which is crammed full of interesting information about cartooning and describes in detail this remarkable method. It will be sent to you without cost, without obligation. Mail coupon for it **TO-DAY!**

Washington School of Cartooning
Room 2412, 1113-15th St., N. W. Washington, D. C.

\$25.00 in PRIZES

See top of page 8 of this issue for full details.

WANTED

Railway Postal Clerks

\$1600 to \$2300 Year

MEN—BOYS 18 UP

MAIL COUPON IMMEDIATELY

Steady work. No layoffs. Paid Vacations.

Common education sufficient.

Travel—See the country



FRANKLIN INSTITUTE, Dept. C280, Rochester, N. Y.

Sirs: Send me without charge, (1) Sample Railway Postal Clerk Examination questions, (2) List of Government jobs now obtainable, (3) Send free illustrated book, "How to Get Government Jobs."

Name.....

Address.....

Money Making Opportunities

PHOTOGRAPHY AND SUPPLIES

FREE 8"x10" enlargement from your favorite negative. Write for Card "S." Liberty Photo Company, O-We-GO, New York.

CAMERA Hospital: Expert camera repairing a specialty. Send your broken camera, will write you cost. Turner, 1679 Ave. A., New York.

ESTABLISH yourself at home, is a photographic expert; make \$75 a week while learning; professional camera furnished free; write quick for full information. International Studios, Dept. 4329, 3601 Michigan Ave., Chicago.

SAMPLE enlargement, dime and negative (returned). Sample 6-exposure roll finished glossy, 25c silver. Brown Studio, Lake Elmo, Minnesota.

SEND Us Your Films. \$550 in prizes given away. First prize, Ford Touring Car. Write us for Free Coupon entitling you to share in drawing held December 17, 1923. Trial roll of film developed for 5c. Prints 3c each. Roanoke Photo Finishing Co., 212 Bell, Roanoke, Va.

HAVE you a camera? Write for free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 117 Camera House, Boston, 17, Massachusetts.

HOROSCOPES

WONDERFUL Self-Revealing Chart and Personality tests. 10c. Thomson-Heywood, Dept. P. S., Chronicle Bldg., San Francisco, Calif.

YOUR horoscope, business, changes, social, matrimonial prospects. Send birthdate and 10 cents (stamps) for remarkable test reading. Zanya, 262-B West 105th Street, New York.

UNUSUAL HOROSCOPE—Six pages, consisting of extensive four-page Special Horoscope, Astro-Analysis and two-page valuable guide giving daily and monthly advice covering entire year. Send 50c and birthdate. Money returned if dissatisfied. Prof. T. Bolles, Box 5, Fordham Station, New York, N. Y.

ARTISTS' MATERIALS

PAINTERS, Decorators, Printers, Artists. Book gives proportions for mixing 3000 colors, \$1.00. Kline, Box 1482, Indianapolis, Ind.

FOR SALE

FOR sale, complete set of watchmaker's tools at a bargain. R. Jaegermann, 5815 Easton Ave., St. Louis, Missouri.

FOR SALE—For Research work, Rabbits, Guinea Pigs, White Mice, Rats; large and small amounts; write for quotations. Henry Moser, 1420 S. 18th, St. Louis, Mo.

CHALK TALKS

LAUGH producing program, \$1.00. Circulars free. Cartoonist Balda, Oshkosh, Wisconsin.

100 LIGHTNING Chalk Talk Stunts, \$1.00. Cartoonist, 2925 Euclid, Kansas City.

MUSIC AND SHEET MUSIC

POEMS wanted—Sell your song verses for cash. Submit MSS. at once or write New Era Music Company, 117, St. Louis, Missouri.

COMPLETE, easy self-instructors—Harmonica, Violin, Piano, Drum, Ocarina, Ukulele, Accordion, Saxophone—25c each. Elses, Publisher, Bowling Green, Ohio.

PROMINENT London music publisher is open for available songs by American writers—amateur or professional; songs judged on merit—not writers' reputations. For further particulars write to American representative, Jack Mahoney, Dept. 8., 145 West 45th Street, New York.

WRITE the words for a song. We compose music. Our chief of staff wrote many hit songs. Submit your song-poem to him at once. New York Melody Corp., 419F Romax Building, New York.

MOTION PICTURE BUSINESS

WRITE photoplays; \$50 each. Experience unnecessary. Details free to beginners. Producers' League, 312, St. Louis.

AMERICA'S Greatest Fortunes made in this Business. Complete outfits sold on Easy Payments. No experience needed. Opportunities everywhere. Free Catalog. Monarch Theatre Supply Co., Dept. 19, Memphis, Tenn.

MOVIE Fans, here's a wonderful opportunity to represent us. Something new and interesting, never before offered. Details and outfit free. Shnapier, 729 7th Ave., New York. Room 711.

WRITE photoplays that sell. Our proposition will interest you. Address, Pribyl's Photoplay Service, Pa. Ave. Sta. Box 351-F, Washington, D. C.

CHINESE AND JAPANESE NOVELTIES

JAPANESE Novelties, dropped into water, expand twice original size, turning into fish, flowers, babies. Package dozen, 15 cts. Hootch Insurance policy. Latest Prohibition joke, free. George P. Heinemann, 7242 Pinetree, Chicago.

BUY oriental goods at wholesale prices, save 30%. Catalog free. Shanghai Trading Co., San Francisco.

REAL ESTATE, ORCHARDS AND FARM LANDS

BIG Returns from Pecan, Orange and Fig Groves. Guaranteed care. Small monthly payments. Dept. 8. Suburban Orchards Co., Biloxi, Mississippi.

OFFICE DEVICES

ADDRESSING machines, multigraphs, duplicators, folders, check writers, sealers, dictating machines, at about half new cost. Pruitt, 170-Z North Wells, Chicago.

OPTICAL GOODS

ARTIFICIAL eyes, \$3. Booklet free. Denver Optic, 508 Barclay, Denver, Colorado.

More Money Making Opportunities
on pages 8 to 24

New Hair for You in 30 Days -or Your Money Instantly Refunded

My amazing guarantee means just exactly what it says! I don't care how thin your hair is—I don't care if you are completely bald—if new hair fails to grow after using my method—then the test costs you absolutely NOTHING! The astonishing proof of what I have done for others is now yours—entirely free. Simply mail the coupon below

By ALOIS MERKE

Founder of Famous Merke Institute, Fifth Avenue, New York

NO matter how long you have been bald—no matter how many different treatments you have taken without results—I have discovered a startling new treatment for baldness which I absolutely guarantee will grow new hair in 30 days—or every penny you have paid me will be instantly—and gladly—refunded.

No one has ever dared to make such a sweeping guarantee before! But do you suppose that I could make it unless I was absolutely confident that my treatment would do all I claim? Never! I would be out of business in a week. But I KNOW what my method will do. For in most cases, its remarkable value is shown by actual statistics covering thousands of cases treated—only three people in every hundred asking the return of their money!

Not One Penny's Risk!

Now I realize that you have perhaps wasted a lot of time and money on

treatments which could NEVER restore your hair. Very likely you are skeptical. All right, I don't blame you. And I'll admit right here that my treatment may not help you either. For your case may be one of the three in every hundred that is absolutely hopeless. In any case, I want you to try my treatment at my risk—and if after 30 days



you are not more than delighted with the results produced—then all you need do is tell me so, and without asking a single question I'll mail you a check refunding every cent you have paid me. I don't want a cent of your money, unless I actually grow hair on your head! You, of course, are to be the sole judge.

Entirely New Method

My treatment is the result of 17 years of experience gained in treating thousands of cases of baldness. This included many long years which I spent in such famous centers of scientific research as Heidelberg, Berlin, Paris, Geneva, and Buenos Ayres. And my method is entirely different from anything known or used before.

There is no massaging—no singeing—no "mange cures"—no unnecessary fuss or bother of any kind. Yet results are usually noticeable even after the very few first treatments.

My treatment proves that a big percentage of baldness is caused—not by dead hair roots—but by dormant hair roots, which can now be awakened and made to grow hair again. The reason other treatments failed is because they did not penetrate to these dormant roots. To make a tree grow you would not

think of rubbing "growing fluid" on the bark. Instead you would get right to the roots. And so it is with the hair.

In all the world there is only one method I know about of penetrating direct to the roots and getting nourishment to them. And this method is embodied in the treatment that I now offer you on my positive guarantee of satisfactory results, or the trial costs you nothing.

Already great numbers of men and women who only recently were bald or troubled with thin, falling hair have, through this method, acquired healthy hair that is the envy and admiration of all their friends. As for dandruff and similar scalp disorders, these in many cases disappear so quickly that it seems almost magical. The treatment can be used in any home in which there is electricity.

Free Booklet Explains Treatment

If you will merely fill in and mail the coupon below I will gladly send you—without cost or obligation—an interesting 32-page booklet, describing my treatment in detail.

This booklet contains much helpful information on the care of hair—and in addition shows by actual photographs what my treatment is doing for thousands of others.

No matter how bald you are—no matter if you are completely bald, this booklet will prove of deepest interest to you. So mail the coupon now—and it will be sent you by return mail.

Allied Merke Institutes, Inc.

512 Fifth Avenue Dept. 1712 New York City

Allied Merke Institutes, Inc.,
Dept. 1712, 512 Fifth Avenue, New York City

Please send me, without cost or obligation on my part, a copy of the new booklet describing in detail the Merke Institute Home Treatment.

Name.....

Address.....

City..... State.....


Actual Results

(Dozens of letters like the following are received every day by the Merke Institute.)

"In the short time I have used your treatment I have gained remarkable results. Dandruff has disappeared entirely. My scalp is now all full of fine, new hair. I would not part with my treatment for 10 times its cost." A. W. B.

"The top of my head is now almost covered with new hair about one-half inch long. I have been trying five years, but could never find anything to make my hair grow until your treatment." T. C.

"Ten years ago my hair started falling. I used hair tonics constantly, but four years ago I displayed a perfect full moon. I tried everything—but without results. Today, however, thanks to your treatment, I am pleased to inform you that I have quite a new crop of hair one inch long. My friends are astonished at the result." F. H. B.

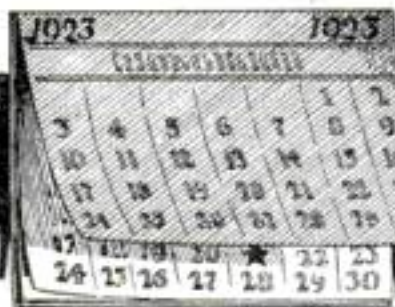

I Will Make You a High Priced Auto-Motive Electrical Expert in 50 days!

IMPORTANT NOTICE! This school is the only one in the country that limits each class to 20 men. That's one reason the training you get in 50 DAYS brings bigger money than many College Graduates can earn after 50 MONTHS of study

MANY Ambu Automotive Electrical Experts earn \$132 a week. And that isn't the top limit. Others operating for themselves charging for the actual VALUE they render, expert service, time saving, etc., do even better. Ellerd, for instance, writes that he averages \$1,000 a month. Ludlow \$175 a week. Get my *free* book which tells how they do it.

Big Jobs Now Open

The demand for Automotive Electrical Experts has always been far greater than the supply. Garage and Repair Shop owners can get plenty of \$40 a week mechanics. They can train mechanics in the shop, but electrical experts need study—training. That's why there is a shortage of men who understand the electrical part of a car. Yet 78% of auto troubles are in the electrical system. No wonder there is always plenty of big jobs for Ambu men. My *free* book tells about these jobs.

No Experience

You don't have to know about Automobiles or Electricity when you start to learn this delightful big-pay profession. I supply you all the knowledge you need in 50 days. I train you to locate, instantly, any electrical trouble on any make or model of car

C. J. Buckwalter, Pres.
AMBU ENGINEERING INSTITUTE,
Dept. 412, 2632 Prairie Ave., Chicago, Illinois.

Please send me *FREE* Book and complete information about the big-pay, uncrowded field of Automotive Electricity. Explain also your remarkable short time offer. I am interested in
() Home Study Course.
() Resident Course at Chicago.

Name

Address

City.....State

Why Good Dancers Are Popular

EVERYONE admires and wants to dance with the person who knows the latest steps. There is no need of being a wall-flower! By my remarkable new easy method, anyone can learn the newest dances at home in a few hours. Much less expensive than from a personal teacher. No music or partner needed. So simple even a child can learn quickly. 90,000 have learned dancing by mail. Your own success is guaranteed.

To prove I can quickly and easily make you an accomplished dancer, I will send you *FREE*, in plain cover, a lesson in Fox Trot, Secret of Leading and How to Gain Confidence. For mailing of free lessons, send 10c. Learn in private—surprise your friends. Act now and be a good dancer soon!
ARTHUR MURRAY, Studio 917, 290 Broadway, N.Y.



and have the car running long before the average auto mechanic could find out what was wrong.

No grease; no heavy lifting, no hand labor. In fact, in some places, the Automotive Electrical Expert directs only—he has mechanics perform the labor under his supervision. See the facts and figures in my *free* book.

Amazing New Way to Train

When the government needed Auto-Electrical Experts for the war there was no time to waste. Men had to be trained 100% right and sent out almost overnight. The man who invented the 50-day method was the man to whom Uncle Sam went for help. Results were amazing. Never before had such a thing been accomplished by anyone. A complete practical thorough training in 50 days. So remarkable that after the war, and at a great cost, it was made available to Ambu students only.

Ambu has even improved on the original plan by not admitting more than 20 men to a class. No other school does this. The smaller the class the more you learn.

Come to Chicago or Train at Home

Hundreds of men who cannot come to Chicago have begged me repeatedly to give them Ambu training at home. And now for the first time you can receive the same world famous training you would get if you came to my great shops—right in your own home—during spare time. No need to give up your present job. I guarantee that my home training will satisfy you or I will refund your money.

Get FREE Book And Unusual Short Time Offer

This book tells what others are making and shows how thousands—with no education or experience have learned this fascinating, big-pay profession in 50 days. If you can't come to Chicago, the book shows how you may make your \$132 a week and more just as those do who learn in Chicago. Also get my amazing temporary offer.

AMBU ENGINEERING INSTITUTE
Dept. 412, 2632 Prairie Ave. Chicago

Begin Today—Write for My FREE BOOK
I can make a good penman of you at home during spare time. Write for my *FREE* BOOK, "HOW TO BECOME A GOOD PENMAN." It contains specimens and tells how others mastered penmanship by the Tumbly System. Your name will be elegantly written on a card if you enclose stamp to pay postage. *FREE* BOOK—Write for it Today.

F.W. Tumbly, 417 Ridge Bldg., Kansas City, U.S.A.

Be a Newspaper Artist!

Win Fortune and Fame. **MANUEL ROSENBERG** COURSE IN NEWSPAPER ART tells you how. 71 lessons and 150 illustrations. Drawing made easy. Complete instruction in layouts, lettering, illustration, cartooning and sketching. Ten years' experience as staff artist of important American dailies. Send \$5 or pay the postman C. O. D. Order yours TODAY.
MANUEL ROSENBERG
Butler Building Cincinnati, O.



Money Making Opportunities

FOR BOYS

THREE foot model aeroplane. Small cost. Circulars free. Aero Shop, 3050 Hurlbut Ave., Detroit, Mich.

BOYS get a model aeroplane that dives, spirals, loops the loop, like a real plane. 30c coin. H. Herman, 1140 So. Sacramento, Chicago, Ill.

PATENTS FOR SALE

IMPROVED Clothes Dryer, for rainy day. A necessity in every home. Outright or Royalty. M. B. Halliday, Walkkill, N. Y.

FOR INVENTORS

INVENTORS' educator. 900 mechanical movements, 50 perpetual motions. How to procure and sell patents. Mechanical movements greatly assist inventors, suggest new ideas. Explain how to select an attorney and avoid patent sharks. Price \$1.50. Postage free. Albert E. Dietrich, 681 Ouray Building, Washington, D. C.

INVENTORS—Send your ideas for manufacturing development to our modern sheet metal and angle-iron fabricating plant. Those pertaining to dust collecting or ventilating preferred. Liberal payment for accepted inventions. Kirk & Blum Manufacturing Co., 2845 Spring Grove Ave., Cincinnati, Ohio.

SELL patents. Established in 1900. Charles A. Scott, 773PS, Garson Avenue, Rochester, New York.

TO sell your patent, write me. Experienced handling, immediate action. Address Arthur S. Billings, Suite 401, Dekum Bldg., Portland, Oregon.

UNPATENTED ideas can be sold. I tell you how and help you make the sale. Particulars free. Write W. E. Greene, Jenifer Building, Washington, D. C.

INVENTION and Patent Promotion Magazine. Interesting information and helpful advice. Send for circular. Burckett, Box 38-8, Station 8, New York City.

BE an inventor. Our course of "Inventive Science" teaches you to successfully invent and sell your ideas, including patent laws, mail order business, and discussion on perpetual motion with photographs. Introductory price \$3. Inventive Science, 406 N. Denver St., El Dorado, Kansas.

PATENTS—Write for Guide Books, List of Patent Buyers and "Record of Invention Blank." Send model or sketch of your invention for our free opinion of its patentable nature. Victor J. Evans & Co., 156 Ninth, Washington, D. C.

COOPERATIVE Plan for commercializing your inventions. Write for booklet. Ralph Burch, Patent Lawyer, Jenifer Building, Washington.

IF you have a practical, useful invention to sell (patented or patent pending), write us today. American Patents Corporation, Barrister Building, Washington, D. C.

PATENT Application involving one sheet drawing prepared for \$15. Art M. Benner, Olympia, Wash.

PATENT ATTORNEYS

PATENTS—Before disclosing an invention the inventor should write for our blank form "Record of Invention." This should be signed, witnessed and returned to us together with model or sketch and description of the invention and we will give our opinion as to its patentable nature free. Our Three Books mailed free to inventors. Our illustrated Guide Book, "How to Obtain a Patent," contains full instructions regarding patents. "List of Patent Buyers" sent free, contains unsolicited letters from manufacturers and others who are constantly writing us regarding the purchase or leasing of meritorious patents. Victor J. Evans & Co., 937 Ninth, Washington, D. C.

BEFORE or after filing application for patent on your invention it will pay you to read over my "Inventors' Adviser No. 1," free for asking. M. Labiner, Registered Patent Attorney, 3 Park Row, New York.

HERBERT JENNER, patent attorney and mechanical expert, 624 F Street, Washington, D. C. I report if patent obtainable and exact cost. Send for circular.

LACEY Patent-Sense. "The Book the Inventor keeps." Free. See page 132.

PATENTS PROCURED; trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Bldg., Washington, D. C., or 2276-Z Woolworth Bldg., New York.

INVENTION—Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, 232 Ouray Bldg., Washington, D. C.

MONROE MILLER, Ouray Building, Washington, D. C., patent attorney, mechanical and electrical expert, Best quality of work and results. Moderate charges.

PATENTS, trade marks, copyrights. Prompt, personal reliable service. Over 30 years' active practice. Write for terms. Book free. Address E. G. Siggers, Box 1, N. U. Building, Washington, D. C.

PATENTS. Booklet free. Highest references. Best results. Promptness assured. Watson E. Coleman, Patent Lawyer, 624 F Street, Washington, D. C.

PATENTS—My fees in installments. Advice book free. Frank Fuller, Washington, D. C.

H. F. Lowenstein, registered patent attorney, Technical expert. 817 McLachlen Building, Washington, D. C.

EDWARD C. SASNETT, formerly a Principal Examiner U. S. Patent Office. Personal Service. 530 McGill Bldg., Washington, D. C.


INVENTORS' Guide free on request; gives valuable information and advice for all who have original ideas or improvements. Frank Lederman, Registered Attorney and Engineer, 15-S Park Row, New York.

MILLIONS spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc., American Industries, Inc., 501 Kresge Bldg., Washington, D. C.

BESSEMER, a barber, invented "open hearth" steel. Perhaps you can invent something worth while. Write today. Horace L. Woodward, Patent Attorney, 710 Ninth, Washington.

M. P. LAUGHLIN—Patents—Engineer—Attorney. 48 E. 41st Street, New York City.

More Money Making Opportunities
on pages 8 to 24

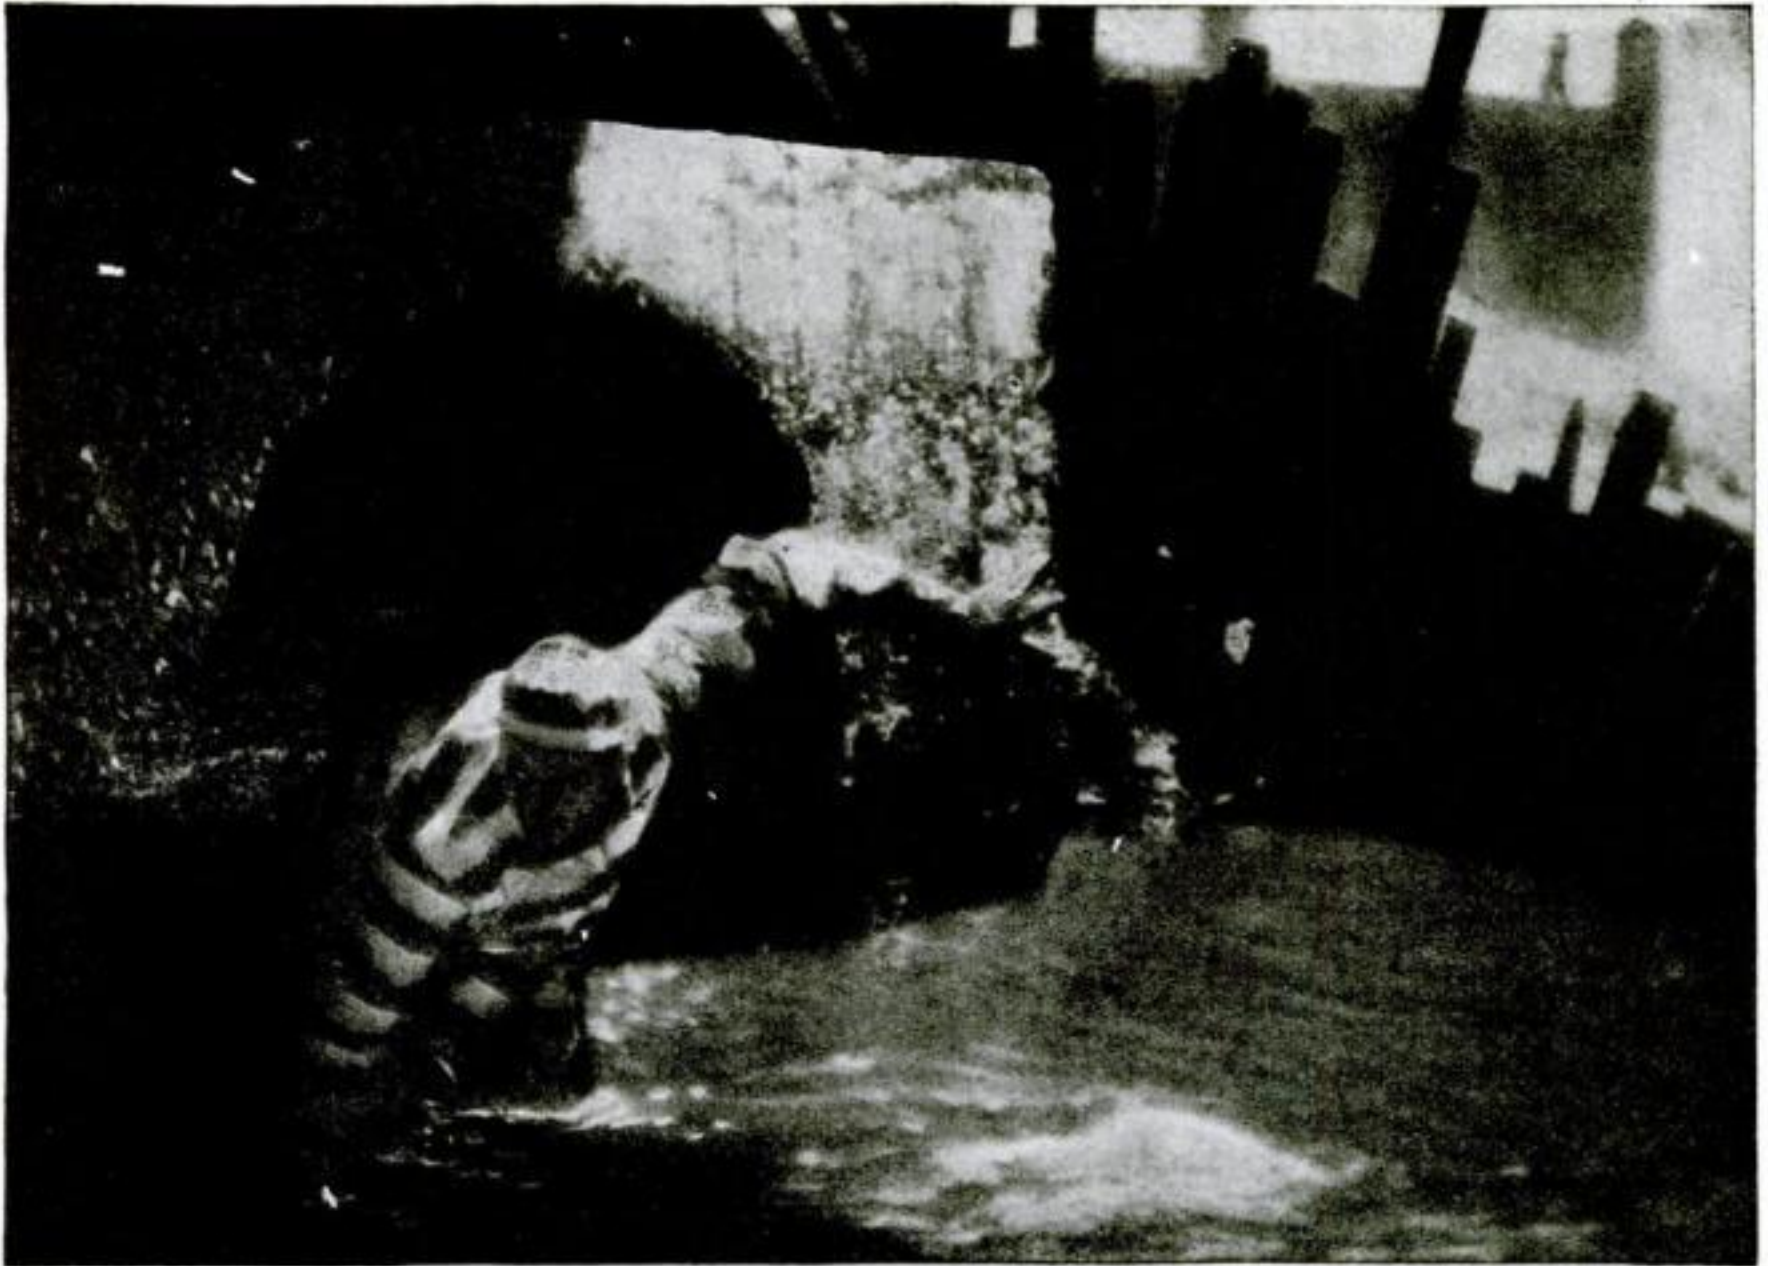

\$1000 Reward

For the Capture of This Man

PARTIAL LIST

Graduates U. of A. S.
Recently appointed
Finger Print Ex-
perts of these
States, Cities and
Institutions.

State of Iowa
State of Idaho
State of Colorado
St. Paul, Minn.
Columbus, Ohio
Detroit, Mich.
Pittsburgh, Pa.
Great Falls, Mont.
Idaho Falls, Idaho
East Lansing, Mich.
Schenectady, N. Y.
Lorain County, Ohio
El Paso, Texas
Galveston, Texas
Houston, Texas
Lincoln, Nebr.
Everett, Wash.
Ogden, Utah
Butte, Mont.
Pueblo, Colo.
Albany County Peniten-
tary, N. Y. [tiary
Wilkes Barre, Pa.
Livingston, Mont.
Alhambra, Calif.
Tulsa, Okla.
Havana, Cuba
Pensacola, Fla.
Fort Collins, Colo.
Calgary, Ala., Canada
Indiana Reformatory
Jeffersonville, Ind.
House of Correction
New Haven, Conn.
Birmingham, Ala.
St. Joseph, Mo.
Marquette, Mich.
Waterloo, Iowa

CONVICT 6138, escaped from the State Penitentiary;
Name, Charles Condray; Age, 37; Height, 5 ft. 8 in.;
Weight, 141 pounds; Hair, light brown; Eyes, gray.

Easy enough to identify him from his photograph and
this description, you may say — but, Condray took the
name of "Brown," dyed his hair, darkened his skin,
grew a mustache, put on weight and walked with a stoop.

Yet, he was captured and identified so positively that
he knew the game was up and returned to the peni-
tentiary without extradition.

How was it accomplished? Easy enough for the Finger
Print Expert. They are the specialists, the leaders, the
cream of detectives. Every day's paper tells their
wonderful exploits in solving mysterious crimes and
convicting dangerous criminals.

The demand for trained men by governments, states,
cities, detective agencies, corporations, and private
bureaus is becoming greater every day.

More Trained Men Needed

Here is a real opportunity for YOU. Can you imagine
a more fascinating line of work than this? Often life
and death depend upon finger print evidence — and
big rewards go to the expert. Many experts earn regu-
larly from \$3,000 to \$10,000 per year.

Learn at Home in Spare Time

And now you can learn the secrets of this science at
home in your spare time. Any man with common
school education and average ability can become a
Finger Print Detective in surprisingly short time.

Course in Secret Service FREE

For a limited time we are making a special offer of a *Profes-
sional Finger Print Outfit, absolutely Free, and Free
Course in Secret Service Intelligence*. Mastery of these
two kindred professions will open a brilliant career for you.
Write quickly for fully illustrated free book on Finger Prints
which explains this wonderful training in detail. Don't wait
until this offer has expired — mail the coupon now. You may
never see this announcement again! You assume no obliga-
tion — you have everything to gain and nothing to lose.
Write at once — address

University of Applied Science
Dept. 13-69 1920 Sunnyside Avenue Chicago, Illinois

UNIVERSITY OF APPLIED SCIENCE
Dept. 13-69, 1920 Sunnyside Avenue, Chicago, Ill.

Gentlemen: — Without any obligation whatever, send me your
new, fully illustrated, FREE book on Finger Prints and your
offer of a FREE course in Secret Service Intelligence and the
Free Professional Finger Print Outfit.

Name.....

Address.....

.....Age.....

You! can be a \$5000 Auto Expert!



J. R. Bayston, Pres.
CHICAGO AUTOMOTIVE
INSTITUTE
Originator of the "Job Way"
system of training

"Cigarette" money pays for this great pay-boosting training. Five "Trades" included at price within reach of anybody. Easy Payments. I deliver the best automotive training on earth for the smallest price. My book tells why. Contains true stories of successes attained in jig-time by my boys. Tells about my **Free Employment Service** which gets big-pay jobs for students and graduates all over U. S. without one penny of charge. Man alive! Don't waste or wait a minute! when a few weeks after you start you can demand real money and assume the authority of the boss's job! Coupon or postal, that's all.

CHICAGO AUTOMOTIVE INSTITUTE
J. R. Bayston, Pres., Dept. 301, 536 So. Clark St., Chicago

LEARN AT HOME THE C.A.I. JOB-WAY

Let Thornton Fisher Teach You Cartooning

A Fascinating Profession
For the past twelve years THORNTON FISHER has become intimately known to millions of readers of New York World and other leading newspapers, for characteristic cartoons on sport and political subjects. In the height of his fame he resigned to teach others his art. Study Cartooning, newspaper illustrating and comic drawing, now, at home under the teaching of this high paid artist. The most fascinating work in the (fascinating newspaper business. Pays \$75 to \$200 a week. Send 5c today for portfolio of Fisher's work, and his booklet. Thornton Fisher School, Box 332, Times Bldg., N.Y.C.



PLAY BY NOTE
Piano, Organ, Violin, Cornet, Mandolin, Harp, Cello, Trombone, Flute, Clarinet, Piccolo, Saxophone, Ukulele, Guitar, Harmony and Composition, Banjo, Tenor Banjo, Voice and Speech Culture, Drums and Traps Automatic Finger Control, etc.

Learn music by playing actual selections—instead of tiresome exercises. When you've quickly mastered a lesson you've thoroughly learned to play a new musical composition. As simple as A, B, C. As delightful as a fascinating game. You'll astound yourself by your rapid progress. You can surprise friends by performing in public before they even suspect that you've taken up music. You learn real notes too—no "numbers" or trick music. You learn by mail—in your own home.

FREE BOOK AND ILLUSTRATED FOLDER SHOW HOW

You can become master of your favorite instrument through the U. S. School home study method. Also tells about "Automatic Finger Control" whereby fingers are guided, trained and made so adept that they fall into their proper places almost automatically. Write today before free edition is exhausted. Mention your favorite instrument or if you prefer vocal lessons. Instruments supplied when needed, cash or credit.

U. S. School of Music
812 Brunswick Building, New York City

Here's quickest way to Train for Big Pay!

Don't quit your job—stay home—just give me an hour of your spare time a day and I'll guarantee to put you in the \$100 a week class after only a few weeks of **Home Study!** My copyrighted "job-way" system teaches you in an hour what ordinarily takes a month to learn. And where can you find such golden opportunities as in the Auto and Truck Business?

MEN WANTED for these Jobs

Master Mechanic	— \$3000 to \$8000
Electrical Expert	— \$3600 up
Garage Manager	— \$3000 up
Battery Expert	— \$2400 up
Expert Welder	— \$2400 up
Salesman	— \$3000 up
Tractor Engineer	— \$2400 up

My graduates earn money fast enough to go into business. Own your own Garage, Battery station, Ignition service, Repair or Welding plant.

Write for FREE LESSON and FREE BOOK!

18-piece Complete TOOL KIT FREE!



Master Mechanic's grade, full size, everything you need. This \$15.00 outfit FREE to every C. A. I. student.

J. R. Bayston, Pres.
Chicago Automotive Institute
Dept. 301, 536 So. Clark St., Chicago

Without a penny of expense or the slightest obligation, please send me **Free Book** about your rapid course in Automotive. Master Mechanics, and Free Tool Kit offer. Explain your money back guarantee. I want to see a **Free Lesson**, too.

Name.....
Address.....

RADIO BOOK

514 PAGES—Greatest book on Radio ever written. New—authoritative—complete. Packed with sound, practical information useful to every radio fan. Send \$1 to-day. Money back if not satisfied.
International Correspondence Schools
Box 7468-C, Scranton, Penna.

only
\$1



FREE BOOK TELLS HOW

Thousands holding Civil Service jobs today were successfully trained by me. I guarantee my training gets you offer for position—or your money is refunded in full. Write for my **BIG FREE BOOK** today. Tells all about Civil Service positions. Examinations coming. Get ready now for job you want. Mail coupon of postal card at once.
Patterson Civil Service School, Dept. 1612, Rochester, N. Y.
Patterson Civil Service School, Dept. 1612, Rochester, N. Y.
Send me without charge, your **FREE BOOK** describing Railway Mail Clerk and other U. S. Government positions.

Name.....
Address.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

BIG Money in spare time for one man in each locality making embossed show cards and price tickets for stores and others. Easy, quick work. No training needed. New embossing machine does it all. 400% profit. Signs sell on sight. T. W. Cushing of Chicago sold \$76 first call. S.D. Downes averaged \$15 a day for 6 months. Many sell \$5 to \$20 daily. No speculation. Before you invest a penny we send you free sample cards to show merchants and convince yourself they sell at sight. Write today. Praemafix Corporation of America, Dept. 400, Geneva, New York.

AGENTS—Best seller; Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold, it vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and accessory dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., 504 Amazon Building, Philadelphia, Pennsylvania.

GET our plan for monogramming automobiles, trucks, hand luggage and all similar articles by transfer method; experience unnecessary; exceptional profits. Motorists' Accessories Company, Mansfield, Ohio.

ONLY one sale a day means \$200 per month! Five sales \$1,000 per month. Marvelous new adding machine. Retail \$15.00. Work equals \$350 machine. Adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five year guarantee. Offices, stores, factories, garages buy one to dozen. A fortune for live agents. Write quick for protected territory and free trial offer. Lightning Calculator Co., Dept. P, Grand Rapids, Michigan.

\$10 DAILY silvering mirrors, plating and refinishing lamps, reflectors, autos, beds, chandeliers by new method. Outfits furnished. Write Gunmetal Co., Ave. F, Decatur, Illinois.

MAKE \$25 to \$50 week representing Clows' Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 24, Philadelphia, Pennsylvania.

EVERYBODY uses extracts. Sell Duo Double strength Extracts. Complete line household necessities. Big repeaters. Write today. Duo Co., Dept. E66, Attica, N. Y.

GET our free sample case toilet articles, perfumes and specialties. Wonderfully profitable. La Derna Co., Dept. F, St. Louis, Missouri.

AGENTS—Make a dollar an hour. Sell Mendets, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Company, Dept. 467, Amsterdam, New York.

AGENTS: Big profits. Best and cheapest window letters made. Easily applied. Dime brings five samples. Particulars free. Stalbrit Company, 1115 Second Avenue, New York.

BIG money and fast sales. Every owner buys gold initials for his auto. You charge \$1.50; make \$1.35. Ten orders daily easy. Write for particulars and free samples. American Monogram Co., Dept. 47, East Orange, New Jersey.

WANTED—Representatives in every factory in the United States. Popular Science Monthly, 225 West 39th Street, New York.

POLMET polishing cloth cleans all metals; sells fast at 25c. Sample free. F. C. Gale, 15 Edinboro St., Boston.

AGENTS: Big money selling Clean-em, crystal washing marvel. Sample free. H. H. Shields, 1938 Telfair St., Augusta, Ga.

WONDERFUL invention—Eliminates all needles for phonographs. Saves time and annoyance. Preserves records. Lasts for years. 12,000,000 prospects. \$15.00 daily. Free sample to workers. Everplay, Desk 1226, McClurg Bldg., Chicago.

50% PROFIT selling name cards, penknives, stationery, catalog. Wolf Labels, Station E, Philadelphia.

SELL Madison "Better Made" shirts direct from our factory to wearer. No capital or experience required. Easily sold. Big profits. Write for free samples. Madison Mills, 503 Broadway, New York.

EARN \$10 daily silvering mirrors, plating and refinishing metal ware, headlights, chandeliers, bedsteads. Outfits furnished. F. Decle Laboratories, 1133 Broadway, New York.

BIG money in the sale of stock for the Southern Chemical Company. Write for particulars to the Arkansas Products Company, Cardwell, Missouri.

AGENTS Wanted—Something New—Fire Fighter sells easily. Makes a spectacular demonstration; car owners, homes, factories, stores practically buy on sight. Our men make \$10.00 to \$50.00 a day; exclusive territory. If you wish to establish a business of your own with unlimited possibilities for making big money, write us today. Fyr-Fyter Co., 191 Fyr-Fyter Bldg., Dayton, Ohio.

AGENTS—Complete line of toilet preparations, including Beauty Clay, Hair Gloss, Lemon Creams. Every woman a user. Colonial Chemical Co., 631 Penn Ave., Pittsburgh, Pa.

SHEEP wool moocasins, polishers, dusters, Box 26, East Boston, Mass.

AGENTS make 500% profit handling auto monograms, new pictures, window letters, transfer flags, novelty signs. Catalog free. Hinton Co., Dept. 125, Star City, Indiana.

STAMPING names on emblem key checks. Sample 20c. Key check outfits, steel dies, key cases, etc. Service Sales Corporation, Shelby, Ohio.

MAKE \$31.00 Profit—Cost you \$1.50 Complete Gold Monogram Outfit. Transferred instantly on Automobiles, Trunks, Bags, Windows. Experience Unnecessary. "Free Samples," Nulife (B) Monogram, Hartford, Conn.

AGENTS—Clever invention! Inkspoon makes every pen a fountain pen. Fast office seller, big profit, demand increasing everywhere. Exclusive territory offered. Sample free. H. Marul Company, Tribune Building, New York.

AGENTS—\$15 a day—Easy, quick sales—Free auto—Big weekly bonus—\$1.50 premium free to every customer. Simply show our beautiful 7-piece, solid aluminum handle cutlery set. Appeals instantly. We deliver and collect. Pay daily. New Era Mfg. Co., 803 Madison Street, Dept. 41R, Chicago.

More Money Making Opportunities
on pages 8 to 24

Takes Only 60 Days to Get a Big Job

Automobile Tractor & Electrical Catalog **FREE**

My Cincinnati School



My Chicago School



You Can Do What These Rahe Men Did

"My garage is a big success. I owe it to Rahe training."—G. Smith, W. Alexandria, O.

"I got a fine job the day after I left school."—W. C. Wyatt, Mt. Sterling, Ky.

"I thank Rahe training for a great job in the best garage in Lima."—Howard Metzger, Lima, Ohio.

"Rahe Training was the best investment I ever made."—Colby Lord, Oakland, Maine.

I'll pay your railroad fare both ways, and pay your board and room; no extras; no incidentals—in 10 weeks you can get a real job at real pay.

No Experience, no Education Necessary. You learn with your Hands under Experts in a Wonderful Shop. No Books. Success Sure.

RAHE-TRAINED MEN IN DEMAND

Rahe-Trained men earn \$200 to \$600 per month—no lay-offs or strikes. You Can Do It, Too. Own Your Own Garage. Send the coupon NOW for my Big Free Catalog.

BE AN EXPERT IN—

Auto and Tractor Mechanics, Ignition, Starting, Lighting, Vulcanizing and Machine Shop Work. Takes only 60 Days.

ELECTRICAL COURSE INCLUDED

All kinds of wiring and generator work. All this in addition to the famous RAHE Life Scholarship, which permits you to return to the school AT ANY TIME for further work WITHOUT COST.

Special Tuition Offer—Short Time Only

Send to My Nearest School for Free Catalog

Rahe Auto, Tractor & Electrical **School**

4445 Grand Boulevard
CHICAGO, ILLINOIS

Ninth and Walnut Sts.
CINCINNATI, OHIO



Desk 381

Send Me Your Big Free Catalog

Name.....

Address.....

City or R. R.....

(No facilities for colored students)



BE A RAILWAY TRAFFIC INSPECTOR

Earn Up to \$250 Per Month

"The Best Thing I Know Of"

—By H. M. LONG



"The S. B. T. I. Course in Railway Traffic Inspection is the best thing I know of and I have never been able to find words to

praise it as I think it deserves to be praised.

"Railway Traffic Inspection is easy to learn if anyone who studies it has any grit at all. And the Course itself is easy, interesting, instructive, important and influential. The hours are not long and the pay is fair to begin with but soon becomes excellent if one only uses his head and maintains himself honestly.

"I want to say for the Standard Business Training Institute that its promises are carried out to the letter and even more. Furthermore, they are always willing to help a man after he has begun working, and for those who do not know, let me say that this means more than they can imagine."

POSITION GUARANTEED

Earn Up to \$250 Per Month, Expenses Paid

Prepare in three months' spare-time study at home for this fascinating profession. Many opportunities for advancement; many men are needed. Steady, pleasant outdoor work; travel or remain near home.

YOU TAKE NO RISK

After completing course if we do not get you a position paying at least \$110.00 a month and expenses, we refund your entire enrollment fee. Cost is moderate.

Send coupon today for full details

**Standard Business Training Institute
BUFFALO, N. Y.**



Standard Business Training Institute,
BUFFALO, N. Y.

Send me, entirely free, Booklet No. D-64, giving full particulars about course in Railway Traffic Inspection.

Name.....
Street.....
City.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

AGENTS Steady income. Large manufacturer of handkerchiefs and dress goods, etc., wishes representative in each locality. Factory to consumer. Big profits, honest goods. Credit given. Send for particulars. Freeport Mfg. Co., 24 Main Street, Brooklyn, N. Y.

WE start you without a dollar. Soaps, extracts, perfumes, toilet goods. Experience unnecessary. Carnation Co., Dept. 21, St. Louis.

NEW invention: reduces gas bills 50%; big money for agents, write quick. Allied Products, box P. S., Waterloo, Iowa.

FREE Sample "Rain Shield Wiper." Retail \$1.00—Costs (25c). Sold Clear and Rainy Days. No Cloth—No Paste—No Attachment. (1) Rub keeps Windshield Clear (48) Hours. Experience Unnecessary. Nullife (1) Corporation, Hartford, Conn.

AGENTS—100% profits. Fast selling novelty for lodge members. Emblematic Belt Co., Ashland, Ohio.

BIG Money and fast sales. Every owner buys gold initials for his auto. You charge \$1.50 make \$1.44. 10 orders daily easy. Write for information and free samples. World Monogram Co., Dept. L, Newark, N. J.

FORDS use kerosene and start instantly. Amazing invention. 200% profit. Territory going. Write Super, 1304-119 Fondulac, Milwaukee, Wis.

MAKE money silvering mirrors, all kinds plating, knives, spoons, auto headlights. Outfits furnished. Free Booklet. International Laboratories, Dept. 27, 311 Fifth Avenue, New York.

SALESMEN, can make \$5.00 a day selling our calendars, pencils, signs, advertising novelties, yardsticks, whistles, etc. Liberal terms. Sells entire year. Fine side line. Local and traveling agencies. Model Calendar Co., Dept. 309, South Bend, Indiana.

EASY, pleasant work for mechanics, shop men, clerks, during spare hours, will add many dollars to their salaries. Also want persons who can give full time. Big wages assured. Novelty Cutlery Company, 27 Bar Street, Canton, Ohio.

\$60-\$200 A WEEK. Genuine Gold Letters for store windows. Easily applied. Free samples. Liberal offer to general agents. Metallic Letter Co., 434A North Clark, Chicago.

AGENTS! Sell rich-looking imported 36-38 rugs, \$1 each. Carter, Tenn., sold 115 in four days. Profits, \$57. You can do same. Write for sample offer selling plan; exclusive territory. Sample rug, prepaid, \$1.39. E. Condon, Importer, 77 Bedford Street, Boston, Massachusetts.

MAKE \$120 Weekly in Spare Time—Sell what the public wants—long distance radio receiving sets. Two sales weekly pays \$120 profit. No big investment, no canvassing. Sharpe of Colorado made \$955 in one month. Representatives wanted at once. This plan is sweeping the country—write today before your county is gone. Ozarka, 803 Washington Blvd., Chicago.

PATENTED Cigar Lighters with Glass Advertising Front. Also Electric Cigar Moistener. Wonderful Sellers. No Competition. Big Steady Profits. Proof, Cuts, Sales Plan Free. Drake Mfg. Co., Dept. P., Milwaukee, Wis.

FREE—Mixing bowls with Chinaware. Special agents' proposition. National Pottery, Roseville, Ohio.

AGENTS—Everywhere women's and children's guaranteed shoes direct to wearer. We deliver. A. P. Condon, Sales Manager, The Allen Shoe Co., 110 Summer Street, Boston, Massachusetts.

MEN, to sell regular \$1.00 and \$1.50 silk and knitted ties for 35c and 50c. Make \$15.00 daily. Write for particulars. American Cravat Exchange, 621 Broadway, New York.

AGENTS—\$1.25 an hour spare time near home. Light, pleasant work, showing samples and distributing tea, coffee, extracts, spices, food products, things people eat, 19 full sized packages and complete outfit to first person in your locality answering. Write quick. Dept. 93, Harley Company, Dayton, Ohio.

AGENTS, both sexes, we manufacture and control new household article. Fast seller. Big profits. Exclusive territory. Write now. Connelly, 123 Liberty St., New York.

LIVE wire salespeople make big money with our quick-selling Office and Home specialties. Write for "Dosen Quick Sellers." Circle Sales Company, 1834 Broadway, New York City.

WHY not sell as your spare time, \$2 an hour. \$19.70 daily easy for full time, introducing New Style Guaranteed Hosiery. 57 styles, 17 colors. No capital or experience required; just write orders, we deliver and collect. Your pay daily, also monthly bonus. Elegant outfit furnished. All colors, grades including silks—wool—heathers. Mac-O-Chee Mills Company, Desk 15212, Cincinnati, Ohio.

\$742 LAST month for Beck, of Buffalo, introducing latest advertising plan; nothing else like it; every merchant wants it; easy sales; no deliveries; no collections; specialty salesmen write quick for offer. National Adv. Service, P. O. Box 51, LaGrange, Indiana.

100% PROFIT Selling Our Felt rugs to homes, hotels, offices, etc. Everybody buys. We are manufacturers, not jobbers. Prices defy competition. \$75 week easy. Newark Felt Rug Company, 27-L 16th Ave., Newark, N. J.

BOYS, girls, men, women, everywhere. Big profits selling the Hatsaver. Protects any hat from rain, snow and dust. Weight one ounce. Carried in any hand bag. Three samples and instructions 25c. To be first in your territory send \$7.35 for one gross, postpaid. R. D. King, 308 South Dearborn, Chicago.

START and operate your own business. Our System proprietary specialty manufacturing offers wonderful opportunity to make \$100 to \$500 weekly. Openings everywhere. Either men or women. We furnish everything and show you how. Big explanatory book. "The Open Door to Fortune." Free. Write for it now. National Scientific Laboratories, 224 Monroe, Richmond, Va.

AGENTS—\$60.00 weekly selling newest sensation: Leather Link Belts going over big. Easy quick sellers. Big profits. Write quick. Victory Belt Co., 1774X Wilson, Chicago.

INSTANT Weld—Repairs largest punctures without cement or heat. Lean's profit one day \$56. Write quick. Free sample. Territory going fast. Tourist's Pride Mfg. Co., Desk R, Minneapolis, Minnesota.

More Money Making Opportunities
on pages 8 to 24

Have You Been Introduced To These New Words?

Thousands of NEW words
have come into the language
Are you making them a part of
your vocabulary? Can you spell,
pronounce, and define them?
The "Supreme Authority"

WEBSTER'S NEW INTERNATIONAL DICTIONARY contains the facts you wish to know.

407,000
Words

6000
Illustrations
2700
Pages

Growth
in all activities
of modern life may
be traced by the NEW
words in WEBSTER'S
NEW INTERNATIONAL

Here are samples:

marquise
camp-fire girl
mystery ship
Air Council
aerial cascade
junior college
Czecho-Slovak
Devil Dog
overhead
Flag Day
agrimotor
irredenta
Esthonia
vitamin
paravane
psoriasis

Waac
realtor
bloc
soviet
nacelle
B. L. E.
zircite
askari
cyper

Schick test
rotogravure
mirrorscope
radiophone
capital ship
Blue Cross
royal spade
broadcast
photostat
nose dive
stop back
narcism
altigraph
Riksdag
Red Star
S. P. boat

and thousands of others

Write for a sample page of the New Words,
specimen of Regular and India Papers, also
Booklet "You are the Jury," prices, etc. To
those naming Popular Science Monthly we
will send free a set of
Pocket Maps.



G. & C.
MERRIAM
COMPANY
Springfield
Mass.

G. & C. MERRIAM COMPANY, Springfield, Mass.

Gentlemen: Send sample page of New Words,
specimen of Regular and India Papers, Free
Maps, per Popular Science Monthly.

Name.....
Street.....
City.....
State.....

Money Making Opportunities

AGENTS AND SALESMEN WANTED

HELLO BOYS! A message from the salesmen of the Alexander Film Company. We are members of a square shooting, smiling, fighting firm that treats a fellow like a partner. Selling motion picture publicity that is par with big feature productions in art and settings. Advertising and sales course, family spirit. You know what that means. Come on, join us—we are challenging only permanent fighters who demand big income for consistent efforts. Alexander Film Company, 3385 So. Broadway, Denver.

NO Dull Times Selling Food—people must Eat. Federal Distributors make \$3,000 yearly and up. Over 100 high grade Toilet Preparations also will increase your profits. A free Course in Salesmanship and ample Capital furnished. Guaranteed sales. Unsold goods may be returned. Free Samples and Advertising matter to customers. Repeat orders sure. Exclusive territory contract. Ask now. Federal Pure Food Co., Dept. 8, Chicago.

WONDERFUL opportunity establish permanent business. Most attractive line Toilet Requisites, entirely new. Be first in territory. Soaps, Extracts, Remedies, Jewelry. Big Profits. Catalogue free. Van Ogden, Inc., 1925 VanBuren, Chicago.

TAILORING Salesmen—Fastest selling line, suits, overcoats, made to measure—\$29.50—one price, all wool. Profits in advance. Biggest old reliable house. W. D. Smith & Co., Dept. 67, established 1895. Chicago.

ABSOLUTELY free box Bassett's Native Herbs sent to introduce. For Constipation, indigestion, headache, rheumatism. Big money selling all or part time. Established 1879. Bassett, Dept. J., Columbus, Ohio.

RUMMAGE Sales make \$50.00 daily. We start you. Representatives wanted everywhere. "Wholesale Distributors," Dept. 34, 609 Division Street, Chicago.

AGENTS—Something New—fastest sellers and quickest repeaters on earth. Permanent, easy. Profitable business. Good for \$42 to \$58 a week. Address, American Products Co., 9849 American Bldg., Cincinnati, Ohio.

AGENTS—Stop wishing work; you can make \$10.00 daily selling articles everybody needs. Particulars free. Write B. & G. Rubber Company, Dept. 454, Pittsburgh, Pennsylvania.

WE start you in business. Good money operating our business leads. No experience required. Manufacturer furnishes everything. Cherokee Sales Company, Department P. S., Danville, Virginia.

MAKE \$17 day—Finest extracts, food products, toilet preparations, household necessities. Credit; sample case free. Write for amazing offer. Perkins Products, B-26, Hastings, Nebr.

WE have four clean cut money making sellers. Every man, woman and child—every home a prospect. Waiting demand, no competition. Profit per sale big. Twenty-five to forty sales per day regularly made. No experience necessary. Full time not required. If you seriously want to earn more and bigger money, Write for Particulars, Multo Mfg. & Sales Co., 58 Delevan Street, Rochester, N. Y.

TANNING Simplified. Formula free. Guaranteed. Tools materials furnished. Agents wanted. R. N. Gilley, Carlton, Texas.

CATARH, Hay-Fever Remedy—Conquers worst cases. Sample Free. Paul Beck, Pittsburgh Building, St. Paul, Minnesota.

AGENTS: \$16 a day. Latest improved portable talking machine. Does more than machines costing five times its price. Built in just like a suitcase. Fully guaranteed. Pay you daily. Write Perry-Ludlow Co., 8-1961, Dayton, Ohio.

YOU can sell wall emblems and emblem goods. Quickest, easiest, profitable. Xmas and year round sellers. Write for free sample—bonus plan. Kier Fraternal Emblem, 439 Como Bldg., Chicago.

\$100 weekly. Agents, crew managers. Absolutely new article selling big to housewife. No capital required. Commissions paid in advance. No collections. No delivery. Exclusive territory. Write quick. Pioneer Corp., 6307 Yale Avenue, Chicago, Illinois.

SELL necessities. Everybody needs and buys the "Business Guide." Bryant cleared \$800 in July. Send for sample. It's free. Nichols Company, Box 1B, Naperville, Illinois.

SELL Auto Quickstart—a new sensation! Starts motor instantly in cold or foggy weather. Eight other rapid sellers. No investment. Big money easy. Write Jubilee Co., 14, Sta. C, Omaha, Nebr.

DISTRIBUTORS WANTED

STAT and County Distributors Wanted. Biggest little thing on the market. E-Z Fil Gas Cap. Sells on sight; fits Fords & 490 Chevrolets. Screw it in and forget it. Never need be taken out. Outlasts life of car. Every owner wants one. Send 50c for sample and plan of distribution as side line, or protected territory. L. B. Collins Sales Co., 31 Wright St., Dunkirk, N. Y.

DISTRICT MANAGERS WANTED

WORLD'S fastest selling auto accessory! County distributors wanted; write today. G. L. W., Spring Oiler Co., San Diego, California.

DISTRICT Managers. Big profits. Men capable of organizing and managing crews of lady solicitors can easily clear \$50 to \$100 per week with the B. & G. Protector, the original and best protector on the market. Every woman between fifteen and fifty needs and buys it. B. & G. Rubber Co., 618 Penn Avenue, Pittsburgh, Pennsylvania. Dept. 455.

BUSINESS OPPORTUNITIES

YOU can have a business profession of your own and earn big money in service fees. A new system of foot correction; readily learned by anyone at home in a few weeks. Easy terms for training, openings everywhere with all the trade you can attend to. No capital required or goods to buy, no agency or soliciting. Address Stephenson Laboratory, 15 Back Bay, Boston, Massachusetts.

USED correspondence courses sold, rented and exchanged. List free. (Courses bought.) Lee Mountain, Piscah, Alabama.

STOP plodding! Be successful. Operate a tire repair shop. Make big profits in any locality. We teach you and furnish complete equipments, \$100 up. Book of Opportunity free. Haywood's, 1306 South Oakley Avenue, Chicago.

"MONTHLY Scherer," Alliance, Ohio, prints big profit schemes; one subscriber making \$25,000 from three; another \$10,000 from one. Try your luck. Year, \$1; 3 months, 25c.

More Money Making Opportunities
on pages 8 to 24

A Moving Picture of Electrical Success!

—Responsibility and Big Pay in One Year—

This series of pictures tells a true story of what others have accomplished through this course. Think of it—a year, or less, from the very start to a position of real responsibility and big pay.

ELECTRICAL experts earn from \$300 to \$1,000 a month. There is a greater demand for competent men than the market can supply. Big business is crying for them, and is willing to pay almost any reasonable salary for trained ability. There is room for all in this wonderful new industry.

Why not fit yourself for a position of prominence in this Big, Money-making Man Market? Marconi and Steinmetz, wizards of electricity, once stood where you are now. Think what they have accomplished!

You can become an electrical expert through the American School Electrical Course **INSIDE OF ONE YEAR**. And you don't have to give up your present earnings and go away to school. Instead, you can actually increase your earnings while you study and **EARN WHILE YOU LEARN**. Hundreds of American School students have done this.

Our files are full of letters from such graduates telling how satisfied they were with the Course and what it accomplished for them. We will gladly supply you with their names, and let you write and ask any of them what they think of us; how they have stepped into money-making positions, assuming responsibility in extensive organizations and superintending the electrical work on large public and national enterprises.

20 Big Electrical Experts Prepared the Special Instruction Papers For This Course

The American School Electrical Course is short and simple, but thoroughly practical. It begins with the fundamentals of electricity and takes you step by step through all the detailed stages of training until you know the profession thoroughly. The Course is taught by high-powered men who know electricity—from its generation to its application. They are practical electricians who know how to impart their knowledge in a common sense, understandable way. All our lessons and text books are simplified to the greatest degree.

FREE Laboratory Outfit

We furnish all books and other essentials without extra charge, including a real Electrical Outfit, containing a high grade motor, wheatstone bridge, electrical magnet, etc. It is not a plaything, but a practical experimental outfit that would cost you \$30.00 retail.

The cost is extremely moderate and within easy reach of all. You may pay in installments, if you wish.

If you want to get into a line of work where you can make good money right from the start—in the least-crowded of all professions—write us today for full information and interesting book, "Your Future in Electricity." Every moment of delay will cost you money in loss of earning power. Fill out the coupon NOW and make your first move toward a real man-size job at a salary such as you've only dreamed about before. Those who act today will be the men who are filling these big-pay positions a year from now!

American School

Dept. E975 Drexel Ave. and 58th St. Chicago
© A. S. 1523

AMERICAN SCHOOL

Dept. E975

Drexel Ave. and 58th St., Chicago

☐ Send me the free booklet, "Your Future in Electricity." This request places me under no obligation.

Name.....

Street.....

City..... State.....



Guglielmo Marconi, as he appears today. Signor Marconi is Honorary Chairman of the Radio Institute of America.

Train for the big Jobs in Radio

There are big radio jobs waiting. Over 6,000 operators have already graduated from our school. But the radio industry is just in its infancy. There are more demands for operators than there are trained men to meet the demand.

Study at Home in Spare Time

Take a complete radio course, starting with magnetism and electricity, going straight through code and the practical operation of commercial radio. Take the same course, with the same careful grading and helpful guidance that resident students are getting. A few months' study will fit you for the U. S. Government operator's license. And you may have three weeks Post-Graduate study free in our New York Residence School.

Good Positions Are Assured
Our school is conducted by the Radio Corporation of America, the world's largest radio organization. This assures you not only finest instruction and closest touch with the most recent radio practice, but also preference for prompt placement in a good position. The pay is excellent from the beginning. The opportunity is unlimited—and entirely in your hands.

Advanced Radio Course

Great popular demand by the advanced student and experienced amateur has led to the opening of an **ADVANCED HOME STUDY RADIO COURSE**, specializing in C. W., I. C. W., telephone and radio measurements. Investigate!

Radio Institute of America

(Formerly Marconi Institute)
Established 1909

328 Broadway, New York City

Indicate by a cross X the course you are interested in:

Radio Institute of America,
328 Broadway, New York.

Please send me full information about radio opportunities today, and your

☐ COMPLETE RADIO COURSE
☐ ADVANCED RADIO COURSE

Name.....

Address.....

Money Making Opportunities

BUSINESS OPPORTUNITIES

ARTIFICIAL Marble, sanitary flooring instruction ornamental casting, concrete plaster, papier-mache decorations, garden furniture, statuary. Rubber moulds. Electrometallurgy, particulars and 200 illustrations free. Chris. Mahler, Huntington, N. Y.

CHEMICAL expert furnishes six manufacturing formulas with complete working directions. 50c coin. Crane Mfg. Co., Box 16, Washington, D. C.

BANKNOTES of Russia, Poland, Austria and Germany in denominations up to 1,000,000. Write for information on same and how to start your own business. George Grigoleit, 29 E. Jackson, Chicago.

PATENTS procured. Trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard H. Owen, 44 Owen Building, Washington, D. C., or 2276-Z Woolworth Bldg., New York.

INCH Display Advertisement 161 Magazines Thrice \$15. Year \$50. Wood's Popular Service, Atlantic City.

UNLIMITED possibilities, making metal toys at home. No experience required. Particulars free. New Specialty Co., 448 E. 79th St., New York.

YOUR Opportunity. Start a Magazine and Mail Order Business. Sample Magazine 10c. Plan Free. H. J. Teeple, Decatur, Indiana.

FREE Instructive Book. Start your own little Mail Order business. Home employment evenings. Also secure Agents to sell for you. We tell you how. Also furnish Beginner's Outfit circulars, samples, specialties. Book sent free. Pier, 315-A, 74 Cortland Street, New York.

START a real estate office of your own. Earn \$3,500 upwards. Our course of 21 lessons tells you how. Booklet P. on application. Frederick Jenkins, Corlaer Heights, Schenectady, New York.

WE start you in business, furnishing everything; men and women, \$80.00 to \$100.00 weekly operating our "New System Specialty Candy Factories" anywhere. Opportunity lifetime; booklet free. W. Hillyer Ragsdale, Drawer 19, East Orange, N. J.

PUBLISH your own magazine. Everything supplied. Sample and instructions; quarter. Lebeuf, Bangor, N. Y.

SPECIAL financial service. Obtain capital, any amount. Banking connections in United States and Europe. Incorporate your business. Sell stock, keep control. Transact any business, anywhere. Avoid personal liability. Low cost for expert services, all corporation supplies, engraved stock certificates, etc. Lists of investors, here and abroad. Write for full information. Advice free. Registrar and Trustee Co., Rochester, New York.

I HAVE over 100 stores paying \$5 monthly. You can do the same in your city. Month's practice qualifies. Midnight Alarm System, 2965 Algonquin, Detroit.

1,000,000 GERMAN marks \$1.00. 1,000,000 Russian rubles \$1.00. Craig Dare, 440 55th St., Brooklyn, N. Y.

HOW to Raise \$500 to \$10,000 quickly. N. Home, 1957 Warren, Chicago.

COMMON Sense and \$100 or more will establish cash business. Dept. R, Paul Kaye, 149 B'way, New York.

PATENTS—Write for our Guide Books, List of Patent Buyers and "Record of Invention Blank" before disclosing inventions. Send model or sketch of your invention for our free opinion of its patentable nature. Terms Reasonable. Victor J. Evans & Co., 190 Ninth, Washington, D. C.

DOLLARS yearly in your backyard. No Mushroom dope. Particulars free. Metz, 313 East 89th, New York.

SUCCEED With Your Own Products—Formulas, Processes, Trade-Secrets. Different, dependable, profitable. Catalog free. Thaxly Co., Washington, D. C.

WORK for yourself writing show cards. Invest one hour daily and earn \$50.00 weekly in short time. Easily learned. Full particulars free. Birch Speedy Correspondence System, 980 Eddy St., San Francisco, Cal.

I MADE \$30 a week home. French bread-making. 15 years' experience. Free booklet tells. Ashbrook, E. 67, Marengo, Ohio.

"MAKE MONEY." 4 in One Auto Cleaner and Polish. Ore Operation. Money back guarantee. Formula \$1. Flansit Co., Wolcottville, Ind.

\$3,000 to \$6,000 yearly. Want it? Others are making it. Send check or money order today for our invaluable books "How to Sell Real Estate," \$3.00—and "How to Conduct Real Estate and Insurance Business," \$1.50. Absolute satisfaction guaranteed. Free Catalogs. Realty Book Co., Dept. 100, Cleveland, Ohio.

HELP WANTED

BE a detective. Excellent opportunity to earn big money, travel, thousands of dollars offered in rewards. Established 1909. Particulars free. Write to C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

SILVERING Mirrors, French plate. Easily learned; immense profits. Plans free. Wear Mirror Works, Excelsior Springs, Mo.

OUR genuine gold window sign letters are an excellent money-making proposition for handy men. Slann Sign System, East Bethune Avenue, Detroit, Michigan.

WANTED Railway Mail Clerks. Free list of Government positions obtainable. Men and Women 17 to 45 years. Salary \$1600 to \$2600 a year. Write today for booklet, free list and sample lessons. United Business Tr. Ass'n, 8181 Dinan Bldg., Detroit, Mich.

STOP daily grind. Silver mirrors, headlights, tableware. Replate stoves, jewelry, brass beds. Dependable, plans free. Clarence Sprinkle, Dept. 95, Marion, Indiana.

GOVERNMENT wants Railway Mail Clerks. \$133 month. List positions open—free. Write today. Franklin Institute, Dept. D41, Rochester, N. Y.

FIREMEN, Brakemen, Baggage men, Sleeping car, train porters (colored). \$140-\$200. Experience unnecessary. 838 Railway Bureau, E. St. Louis, Ill.

MEN—Age 17 to 45. Experience unnecessary. Travel, make secret investigations, reports. Salaries, expense. American Foreign Detective Agency, 321, St. Louis.

SALESMEN: We pay larger commissions than any other Brush House in the Country to men selling our line of Sanitary twisted in wire-brushes. Sanitary Wire Grip Brush Co., 15-17 Mercer Street, New York City.

More Money Making Opportunities
on pages 8 to 24

NOW Everybody Can Dance

Learn in One Hour at Home

There's now no need of being a wall-flower. In one hour—at home—by mail—I can make you an easy confident dancer—popular in any ball-room.

NEW EASY METHOD

No Partner Needed—No Embarrassment

Over 60,000 men and women have become popular dancers of Fox Trot, One Step, Waltz and all latest up-to-the minute society dance steps through my new Photo-tell and Fono-tell Method set to music. Amazingly easy—fascinating. No other course like it. I teach you perfect time and rhythm—the secret of good dancing.

Six Lesson FREE TRIAL

Convince yourself at my expense how amazingly easy it is to learn modern dancing with my new method. For a short time only I'll send the first six lessons of my course (in plain wrapper) including 10-inch dance instruction record, free and prepaid for five days trial. See, test and prove this remarkable new method in your own home. Then, if not delighted at your success, simply return record and lessons within five days and you'll owe me nothing. Write quick before this unusual offer expires. Please mention make of phonograph you have.

WILLIAM CHANDLER PEAK, M. B.
Studio 48, 4601-11 Broadway Chicago, Ill.

MAKE MONEY AT HOME

YOU CAN earn \$1 to \$2 an hour writing show cards at home in your spare time. Quickly and easily learned by our new simple "Instructograph" method. No canvassing or soliciting. We teach you how, guarantee you steady work at home, no matter where you live, and pay you cash each week. Full particulars and booklet free. Write to-day.
AMERICAN SHOW CARD SYSTEM LIMITED
Authorized and Fully Paid Capital, One Million Dollars
206 Adams Bldg., Toronto, Canada

Learn Photography at HOME

Make \$75.00 a Week on the Side

Establish yourself as a Photographer. Expert quickly—during your spare time—under a leading photographer. I'll show you how to start your own business—or command a large salary. Send for my unusual offer—it's only temporary. Act at once. A postal will do.
International Studios, Inc., Dept. 2389
3601 Michigan Ave., Chicago, U. S. A.

Amazing Automatic Washer!

Wonderful new invention—fits any wash boiler—washes clothes snow white in thirty minutes. Sells for less than one-tenth the cost of old fashioned complicated electric machines. Most efficient washer known. Operates by heat from your own stove. Can be used anywhere. No moving parts—no electricity—no hand power or rubbing necessary. Absolutely guaranteed to give perfect satisfaction. Write today for 30-day Free Trial offer, also special low price. **AGENTS WANTED**. Be the first in your territory to make big money with this remarkably easy seller.

TORRENT WASHER CO., Section 5, 122 So. Mich. Ave., Chicago

"STAMMERING Its Cause and Cure"

You can be quickly cured if you stammer. Send 10 cents coin or stamps, for 288 page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammering and Stuttering for 20 years.

Benjamin N. Bogue, 7500 Bogue Bldg., 1147 N. 10th St., Indianapolis

WRITE JOKES

Earn From \$50 To \$150 Per Week

writing jokes, epigrams and humorous stories for publications. Tremendous demand for material. Our short course in Humor Writing teaches you to write humorous material that sells. Learn in your spare time—earn in your spare time. Complete marketing plan and markets furnished.

Write for full particulars

American Institute of Humor
Office K 414 Park Bldg. Cleveland, Ohio

HERE'S A REAL BUSINESS!

MONEY AT HOME

Start permanent business. Everything furnished. Work anywhere, only table room required. \$25.00 to \$75.00 weekly operating Tangle Art Portrait Landscape Painting Business. No experience necessary. Hundreds of successful workers. Quickly learned in 10 lessons. Free booklet. We employ you.
Tangle Company 217 Main, Muscatine, Iowa

BOYS



Drawn from actual photograph of student doing spare time electrical work

Learn Electricity Make Big Money

How would you like to earn two or three dollars every evening after school and prepare yourself for a fine big job at the same time? Here's the opportunity of a lifetime for you fellows who like Electricity. Begin right now to prepare yourself for a regular man's size job in this fascinating field. Your chances for a big success are simply wonderful—the pay is big (\$70 to \$200 a week) and advancement comes swift and sure.

I will Train You at Home

With my easily learned, sparetime Electrical Course I will train you at home like I have trained hundreds of other boys who are now big successful men. It will not interfere with your school work and you can earn more than the small cost of the course doing odd electrical jobs in your spare time. The Course pays for itself. I will show you how to get this work and how to do it. Some of my boy students make \$10 to \$15 a week this way.

Tools, Apparatus and Radio Course FREE

Send me the coupon below and I will tell you all about the big outfit of tools, apparatus and instruments and a new Radio Course that I am giving to my students for a limited time. I will send you my big interesting Electrical Book and a sample lesson, too—all Free. You will be tickled with the things I will send you Free. Mail the coupon right now.

L. L. COOKE, Chief Engineer
Chicago Engineering Works
Dept. A-39, CHICAGO

Look What This Boy Is Doing

"Although the School term is coming to a close, and I am pretty busy with my examinations, I manage to keep up with my electrical studies and work. I guess I forgot to tell you I am now in business for myself. Am doing fine, but owe it all to you. If it had not been for your Course, I, being under age, could not have secured my license in this town. But I got it, and now have all the work I can do, averaging \$20 to \$30 a week, thru spare time work. I went out on a job tonight after school, on which I made \$3 and brought home another on which I made \$2.50—\$5.50, for 4 hours' work and no material furnished by me."
ROGER SMITH,
1215 Chestnut St.,
Greenville, N.C.

Use This "FREE OUTFIT" Coupon

L. L. COOKE, Chief Engineer,
Chicago Engineering Works,
Dept. A-39, 2150 Lawrence Ave., Chicago
Send me your Free Outfit Offer, your big Electrical Book, Sample Lesson and particulars of your Electrical Course and Free Radio Course. This will not obligate me in any way.

Name.....
Address.....
This Coupon only for use of boys 15 years old or more.



WANTED—Railway Postal Clerks

TRAVEL—See the country
\$1600 First Year
MEN—BOYS 18 UP
Mail Coupon immediately
Name.....
Address.....
FRANKLIN INSTITUTE
Dept. C-281, Rochester, N. Y.
Sirs: Send me, without charge, (1) specimen Railway Postal Clerk Examination questions; (2) list of government jobs now obtainable; (3) send free illustrated book, "Government Jobs."

PRACTICAL ELECTRICITY

SELF TAUGHT COMPLETE COURSE IN ELECTRICITY FOR FREE EXAMINATION



HAWKINS ELECTRICAL GUIDES

3500 PAGES—4700 PICTURES—\$1 A VOLUME—\$1 A MONTH—10 VOLUMES

Know the facts in Electricity. They mean more money and better position for you. Hawkins Guides tell you all you need to know about Electricity. Every important electrical subject covered so you can understand it. Easy to study and apply. A complete, practical working course, in 10 volumes. Books are pocket size; flexible covers. Order a set today to look over.



POCKET SIZE

FLEXIBLE COVERS

Easy to Read and Understand

LEARN ALL ABOUT THESE IMPORTANT POINTS

Magnetism — Induction — Experiments —
Dynamoes — Electric Machinery — Motors —
Armatures — Armature Windings — Installing of Dynamoes—Electric Instrument Testing—Practical Management of Dynamoes and Motors—Distribution Systems—Wiring—Wiring Diagrams—Sign Flashers—Storage Batteries—Principles of Alternating Currents and Alternators—Alternating Current Motors — Transformers — Converters — Rectifiers — Al-

ternating Current Systems — Circuit Breakers — Measuring Instruments—Switchboards—Wiring—Power Stations — Installing — Telephone — Telegraph — Wireless — Bells — Lighting — Railways. Also many Modern Practical Applications of Electricity and Ready Reference Index of the ten numbers.

SHIPPED FREE NOTHING TO PAY TO THE POSTMAN

Not a cent to pay until you see the books. No obligation to buy unless you are satisfied. Send Coupon now—today—and get this great help library and see if it is not worth \$100.00 to you—you pay \$1.00 a month for ten months or return it.

Over 5000 readers have O.K'd this set.

USE FREE COUPON NOW

THEO. AUDEL & CO., 72 Fifth Ave., New York City
Please submit me for free examination, HAWKINS ELECTRICAL GUIDE (Price \$1 a number). Ship at once prepaid, the 10 numbers. If satisfactory I agree to send you \$1 within seven days and to further mail you \$1.00 each month until paid.

Name.....
Occupation.....
Employed by.....
Home Address.....
Reference.....
P. S. M. Inc. 23



More Money For You in RADIO

THE amazing expansion of Radio has opened up hundreds of wonderful new positions on land and sea. Big salaries, fascinating, easy work, short hours, and a wonderful future are offered to ambitious men who get into Radio now.

Take advantage of these wonderful opportunities to step into a big paying position in this great new field. Radio offers you an opportunity to travel and see the world, with all expenses paid, and a fine salary besides. Or you can stay at home and work up to a position paying up to \$10,000 a year. One of our recent graduates secured a position one week after graduating, paying a salary of \$300 per month.

Easy to Learn Radio At Home

Hundreds of men are already earning handsome incomes in this wonder science. If you want to get into a profession where opportunities are unlimited make Radio your career—become a Certified Radio-trician.

Thousands of Certified Radio-tricians are wanted to design Radio sets; to make new Radio improvements; to manufacture Radio equipment and to install it; to maintain and operate great broadcasting stations and home Radio sets; to repair and sell Radio apparatus; to go into business for themselves; to operate aboard ship and at land stations.

You can easily and quickly qualify in your spare time at home through the help of the National Radio Institute. Prominent Radio experts will help you. Four wonderful instruments are loaned to students, making the work thoroughly practical. The same plan that has already helped hundreds of our graduates to real success and real money in Radio is open to you.

Send for BIG BOOK

No other field today offers such great opportunities as Radio. Take your choice of the many wonderful openings everywhere. Prepare now to step into the most interesting and best paid profession today. Read about the opportunities open now—the different kinds of work—the salaries paid. Write today for the 44-page book that tells how America's first and biggest Radio school can teach you to become a Certified Radio-trician in your spare time. Mail the coupon or write a letter NOW.

National Radio Institute

Dept. 12-M

Washington, D. C.

National Radio Institute, Dept. 12-M
Washington, D. C.

Without obligation send me your book, "Your Opportunity in Radio," which tells all about the opportunities in Radio, how spare time study at home will qualify me quickly as a Certified Radio-trician so I can get one of these splendid positions, and how your Employment Service helps me to secure a big pay job.

Name.....Age.....

Street.....

City.....State.....

Note: Radio Firms Secure practical Radio experts among our graduates. Write us today.

Money Making Opportunities

HELP WANTED

SMALL capital starts paying mail order business. Toilet specialties without competition. Proposition and particulars free. Glacier Laboratories, Springfield, Minn.

MEN and Young Men—Reliable—wanted everywhere to distribute free samples, almanacs, etc. No selling or soliciting. No experience or capital needed. Permanent business opportunity at big pay. Spare or full time. Do not fail to write us at once for contracts and details. American Advertising Association, File DD7, 6930 North Clark Street, Chicago, Illinois.

MEN Wanting Railway Station-Office positions with transportation furnished, experience unnecessary; write quick. Baker, Supt., Dept. 75, Wainwright, St. Louis.

ALL men, women, boys, girls, 17 to 65, willing to accept Government Positions, \$117 - \$250, traveling or stationary, write Mr. Ozment, 295, St. Louis, Mo., immediately.

EARN \$10.00 to \$35.00 weekly mailing circulars at home. Outfit and instructions 25 cents. Jamorris, 2305 Gratz, Philadelphia, Pa.

GOVERNMENT positions, \$1400-\$2300 yearly. Many openings. Thirty-six page information booklet free. Chicago Civil Service College, B-70, Kessler Building, Chicago.

MAKE money in spare time mailing letters. Rare opportunity now. Men, send addressed envelope for special terms. Normande H, 147 W 23d St., New York.

DETECTIVES earn big money. Excellent opportunity. Travel. Fascinating work. Experience unnecessary. Particulars free. Write American Detective System, 1968 Broadway, New York.

\$50-\$200 WEEK. Genuine Gold Letters for store windows easily applied. Liberal offer to general agents. Metallic Letter Co., 431B N. Clark, Chicago.

RAILWAY Postal Clerks—Start \$133 month. Railroad pass; expenses paid; questions free. Columbus Institute, N-2, Columbus, Ohio.

EARN \$110 to \$250 monthly, expenses paid, as Railway Traffic Inspector. Position guaranteed after completion of 3 months' home study course or money refunded. Excellent opportunities. Write for Free Booklet, CM-13, Stand. Business Training Inst., Buffalo, N. Y.

WRITE photoplays: \$50 each. Experience unnecessary; details free to beginners. Producers' League, 312, St. Louis.

YOUNG men wanted at once. Become draftsmen, and earn \$50 to \$100 a week. No experience required. Big demand; splendid opportunities; clean work. Learn in spare time at home. Send for our Free Book. Just out. No charge. Address: Department 2239, Chicago Tech., 118 E. 26th Street, Chicago.

STAMPS AND COINS

NYASSA Giraffes and packet of 52 different scarce stamps, Flume Triangle, large, \$1.00 U. S. Rev., millimetre scale, perforation gauge and ruler for only 9c. To introduce our Sudden Service approvals. Fennell Stamp Company, Dept. C, Fullerton Bldg., St. Paul, Mo.

45 DIFFERENT United States 10c; 27 different Austria newspaper stamps 15c. C. Seidenberg, Merton, Wis.

STAMPS, 20 unused. All different, 3 cents. Mention paper. Quaker Stamp Co., Toledo, Ohio.

ALL different \$1.10 each. 20 Czechoslovakia, 25 Japan, 20 Liechtenstein, 25 Poland. Fred Onken, 630 79th Street, Brooklyn.

CALIFORNIA gold \$1/4 size, 27c; \$1/2 size, 53c. White cent and catalogue, 10c. Norman Schultz, Colorado Springs, Colorado.

STAMPS free! 24 British Colonials to approval applicants. Nickles, 122 Florida, Washington, D. C.

STAMPS, 105 China, etc., 2c. Album (500 illustrations) 3c. Bullard, Station AA, Boston.

GENUINE Confederate \$5 bill 10c. Durso, 25 Mulberry, New York City.

1,000 U. S. and foreign postage stamps, 25 cents postpaid. C. W. Parker, 77 Kensington Heights, Meriden, Conn.

ASIA—50 Different 15c. Browne, 90 Kemper St. Wollaston, Mass.

100 DIFFERENT new Europe free to approval applicants sending return postage. Anvelink, 2410 Prairie St., Milwaukee, Wis.

HARDING mourning stamp on cover—also 300 different for 25c. Jacob Fischer, 4230 Crystal St., Chicago.

1000 Different Stamps \$1.55; 500 55c; 300 27c. Michael, 5353 Calumet, Chicago.

17 VARIETIES Bulgaria stamps, 20 cents. List of 7,000 low-priced stamps free. Chambers Stamp Company, 111C, Nassau Street, New York City.

FREE—14 Ukraina to (50%) approval applicants only. Lampe, 423 West 42nd, New York.

FREE premium to approval applicants sending 2c. Price list free. Richard Lamprecht, Dept. M, Valparaiso, Ind.

STAMPS—50 varieties, Africa, Brazil, Peru, Cuba, Mexico, etc., 10c. 50 different U. S. 25c. 1,000 hinges, 10c. 1,000 mixed, 40c. List free. C. Stegman, 5940 Cote Brillante, St. Louis, Missouri.

100 RARE and valuable foreign stamps, all different, bargain lists, and Stanton's Stamp News three months, all for 10c. Stanton, Niantic, Conn.

100 DIFFERENT stamps free to Popular Approval applicants; postage 2c. Christensen, 124 Second Street, Milwaukee, Wis.

OLD Coins—Large Fall selling catalogue of coins for sale, free. Catalogue quoting prices paid for coins, 10c. William Hesslein, 101-B Tremont St., Boston, Mass.

158 GENUINE Foreign Stamps—Mexican War Issues, Venezuela, Salvador and India Service, Guatemala, China, etc., for only 10c. Finest approval sheets 50% to 60%. Agents wanted. Big 72-p. lists free. We buy stamps. Established 29 years. Hussman Stamp Company, Dept. 55, St. Louis, Missouri.

SEND references for best 60% approvals in America. Norman Schultz, Colorado Springs, Colorado.

FAMOUS Barney Google packet to approval applicants—only 10 cents. Sid. Desk 11a, 740 Langdon, Madison, Wis.

SET Austria, Bavaria, Bulgaria Free for 2 cent Stamp. Poste Stamp Co., 5418 Sansom Street, Philadelphia, Pa.

More Money Making Opportunities
on pages 8 to 22



LEARN BY DOING

Every phase of all
branches of

ELECTRICITY

taught by

Actual Practice

In America's foremost and oldest
institution for trade training

No Books Used

Individual Instruction.
Start Any Day

Write for FREE 64-page catalog

THE NEW YORK ELECTRICAL SCHOOL

40 West 17th St., New York City



WANTED! RAILWAY MAIL CLERKS

Free list of Government Positions obtainable.

Men and Women 17 to 45 years.

Salary \$1600 to \$2600.

Write today for Booklet and list.

UNITED BUSINESS TRAINING ASS'N
807 Dinan Bldg., Detroit, Mich.

Can You Draw This?

If you can write you can learn to draw. The famous artist Chas. Lederer, founder of the Lederer School of Drawing, and author of the Lederer Home Study Course in Drawing, Art and Cartooning—has always said that by the use of his course, it was easier to learn to draw than to learn to write. Thirty thousand students, without a single complaint, prove that he is right. The Lederer Course was formerly a high-priced course, sold in the old expensive way. To eliminate this expense, and just as an experiment on our part, we will send you the complete course of 34 lessons upon receipt of \$2.95. Order now, offer may be withdrawn. LEDERER SCHOOL OF DRAWING, Dept. 72-A, Chaffanooga Tenn.

LAW

STUDY AT HOME
Become a lawyer. Legally trained men win high positions and big success in business and public life. Greater opportunities now than ever before. Be independent—be a leader. Lawyers earn \$3,000 to \$10,000 Annually.

We guide you step by step. You can train at home during spare time. Let us send you records and letters from LaSalle students admitted to the bar in various states. Degree of LL. B. conferred. Thousands of successful students enrolled. Low cost, easy terms. We furnish all text material, including foreign and "Evidence" books FREE. Send for them—NOW.

LaSalle Extension University, Dept. 1283-L Chicago

HOME
STUDY

Become More Efficient
through courses in Mathematics, History, English, Chemistry, Psychology, Education, Business and 35 other subjects which the University gives by mail. They command credit toward a Bachelor degree and may be begun at any time.

The University of Chicago
25 E. 11th Hall Chicago, Ill.

LEARN AUTOS and TRACTORS

Wonderful opportunities constantly offered trained men—We train you thoroughly to start your own business, or to make good money as motor expert, driver, shop foreman, etc., and furnish you with a \$12.00 tool kit free of charge. This is the pioneer auto school. Over 7000 graduates making good. Catalog free. Cleveland Automobile School, 1821 East 24th Street, Cleveland, Ohio





FREE Trial Lesson DRAFTING

Mail the coupon and we will send you this Free Trial Lesson which will show you how well prepared you are to master Drafting. No obligation on your part, nothing to pay. While other schools ask you to enroll and pay a fee at once, we send you this lesson first. Before you pay a cent or decide about enrolling—test your ability and learn about the Chicago Tech. method of teaching Drafting by mail.

Double Your Earnings

Big concerns everywhere are seeking expert Draftsmen. Top notch salaries are paid to experts. This is your chance to step ahead just as R. L. Cary did who reports 300% salary increase since training with Chicago Tech.; or as J. A. Da Costa did who was doing manual labor and rose to an executive position—and hundreds of others.

Train by Mail

By the Chicago Tech. Method you can become an expert Draftsman by home study. Practical men will give you the training that brings highest pay. No useless theories—you learn how to handle actual problems. Direct personal instruction in your spare time. We furnish full size professional Drawing Outfit (retail price \$25) free or credit you on fees if you already have an outfit.

Send the Coupon

Ask now for the Trial Lesson. We will also send catalogs and full information about the Chicago Tech. Method. No obligation—no promise on your part. Fill out and mail the coupon today.

CHICAGO TECHNICAL COLLEGE

1231 Chicago Tech. Bldg., Chicago, Ill.

Without cost or obligation on me please send instructive matter about opportunities in line I have marked with "X".

- ☐ **DRAFTING.** (The Big Salary Course.) No experience necessary. Free lesson sent now.
☐ **BUILDING TRADE COURSE.**
 For men in the building lines.

Name.....

Address.....

Post Office..... State.....

LEARN PIANO FREE BOOK

This Interesting Free Book shows how you can become a skilled player of piano or organ at quarter usual cost. It shows why one lesson with an expert is worth a dozen other lessons. Dr. Quinn's famous Written Method includes all of the many important modern improvements in teaching music. Brings right to your home the great advantages of conservatory study. For the beginner or experienced player. Endorsed by great artists. Successful graduates everywhere. Scientific yet easy to understand. Fully illustrated. All music free. Diploma granted. Write today for free book.

QUINN CONSERVATORY, Studio 598 Columbia Rd., Boston, 25, Mass.

Learn Cartooning

At Home—In Your Spare Time from the school that has trained so many successful cartoonists of today earning from \$50 to \$200 and more a week. The Landon Picture Chart Method of teaching makes original drawing easy to learn. Send 6c in stamps for full information and chart to test your ability. Also state age.

THE LANDON SCHOOL
1451 National Bldg., Cleveland, O.



NEW TRAINING PLAN IN ELECTRICITY



Takes Only
20
WEEKS

S. V. SMITH
President, S. & H.
Engineering Works

Mr. Smith is known as the "Electrical Wizard" not only because of his vast knowledge of Electricity, but also because he has been so successful in his training that many of his students are holding some of the most important Electrical positions in America.

Amazing New Method Prepares You Quickly at Home for Better Jobs

Remarkable "Shop Type Home Training System" is the most complete, thorough and easily mastered Method ever devised. Trains you for the Higher Paying positions in Electricity.

DON'T be satisfied to become an ordinary Electrician. Our remarkable new method enables you to AIM HIGHER, and GET HIGHER—it places the BIG PAY jobs at the top of the profession at your disposal. It is different from all other courses.

A Master Course

This new system was designed by S. V. Smith, called by his friends the "Electrical Wizard" because of his ability to teach Electricity and because of the reputation and high positions attained by those whom he has taught.

This SHOP-TYPE HOME TRAINING SYSTEM—which makes you so efficient—is an exclusive feature of S. & H. TRAINING.

It gives you all the theoretical knowledge of electrical principles that is taught in Technical Universities. That is something the ordinary Electrician NEVER gets.

But, in addition it gives you the PRACTICE that a man gets only from doing practical work, which is something the College student does not get. The men at the head of big Electrical Plants—the men in the \$10,000 jobs MUST have BOTH the Theory and the Practice. S. & H. TRAINING gives you BOTH.

If you are able to read and write ordinary English, we can train you to do house wiring, central station and power house operation, automotive and tractor electricity, electric welding, armature winding, motor and generator work, etc., so that when you are in charge of a plant you can tell every man in it what to do and how to do it.

Learn in Few Months

Because Mr. Smith has devised numerous shortcuts this EXTRA training takes no longer than the ordinary courses.

Free Outfit

To all who send coupon at once, Mr. Smith offers FREE, a complete outfit of Electrical Apparatus, Instruments and Appliances for experimental and practical home shop work. By enrolling now you will be entitled to this outfit—but you must send coupon immediately.

Do this today. Get our big catalog giving information about this amazingly rapid and easy course. Read in it the letters from other students who have attained big success through S. & H. Training. This catalog will also explain the remarkable service rendered our students by the S. & H. EMPLOYMENT BUREAU. This service is offered absolutely free.

Mail coupon now. No obligation.

S. V. SMITH
S. & H. Electrical Works
Dept. S 16, 1422 W. Monroe St., Chicago, Ill.

Mail For FREE Offer

Chief Engineer Smith,
S. & H. Electrical Works,
Dept. S 16, 1422 W. Monroe St.,
Chicago, Ill.

Please send me catalog and full information about the remarkable S. & H. Course, your FREE OUTFIT, your Employment Bureau, etc. This information is free and does not obligate me in any way whatsoever.

Name.....

Address.....

City..... State.....

We Guarantee You A JOB While You Learn And Place You When You Graduate

Erwin Greer
PRESIDENT



With Greer training you can go in business for yourself. This means independence, no boss and earnings that run from \$300 to \$5000 per month.



Salaries for the Greer-trained Head Automotive Mechanic average \$150 to \$500 per month or higher, depending upon character of shop.



Greer-trained Truck and Tractor Repairmen need never lack a steady job at from \$6 to \$15 per day.



RECORD-breaking automobile sales have created thousands of \$50 to \$125 per week jobs for highly trained automotive men. Hundreds of requests for such men—Greer Graduates—come to our files. The demand is so great that we need more men to qualify for these big-money jobs. **THAT IS NOT ALL!** We actually **GUARANTEE** to get you a job paying up to \$30 per week to help you while you learn. Only a small payment down is necessary on the course you select. Then Greer quality training takes hold and fits you for the kind of jobs that only Greer men can fill. You leave here equipped to take your place at the top. Only the best instruction is good enough for YOU. Don't shop for bargains on a matter so vital to your future welfare. Let Greer help you. Get in touch with us at once. Inspect the methods best for you in training.

GREER-TRAINED Automotive Experts Earn \$50 to \$125 Per Week

**Day and Evening Classes On Every Automotive Subject
Qualify You For Big Pay, And Help You Earn While You Learn**

Greer College instruction is combined with actual shop practice. When you finish here you will know exactly what to do in any garage or repair shop in the country. Here in the big Greer shops you get actual work on 4, 6, 8 and 12 cylinder engines. Electricity thoroughly covered. All known Lighting, Starting and Ignition units used. Special courses in Machine Shop, Batteries, Welding and Vulcanizing.

Greer trains you to sell. Competent Automobile Salesmen earn up to \$20,000 per year.

Individual road lessons given.

Be An Expert In All These

Complete Greer Course includes **Machine Shop Practice—Shop Management—Selling—Truck, Tractor and Automobile Repairing—Lighting—Starting—Vulcanizing—Storage Batteries—Driving**—everything required to equip you for the highest paid automotive positions anywhere.

MAIL THE COUPON

Do not fail to fill and mail the coupon below. It will bring you the big **FREE BOOK**, "How to Succeed in the Automobile & Tractor Business"—also Special Tuition Offer and complete information **ABOUT JOBS**.



This magnificent new seven-story building—its 80,000 square feet of floor space filled with repair shops and modern shop equipment—is entirely devoted to training Greer Students. This is where you will prepare yourself for a lifetime of pleasant work at big pay.

GREER

COLLEGE

of Automotive Engineering

2042 South Wabash Avenue


CHICAGO, ILLINOIS

**How To Succeed
in the
Automobile & Tractor
Business**


ERWIN GREER, President
2042 S. Wabash Ave., Chicago, Ill.
Send me your Free Book, "How to Succeed
in the Automobile Business," and Special
Tuition Offer.
Name.....
Address.....

Men of the Hour in the Field of Science

Timely Glimpses of Master Craftsmen Who Are Busy in the World's Workshops of Progress

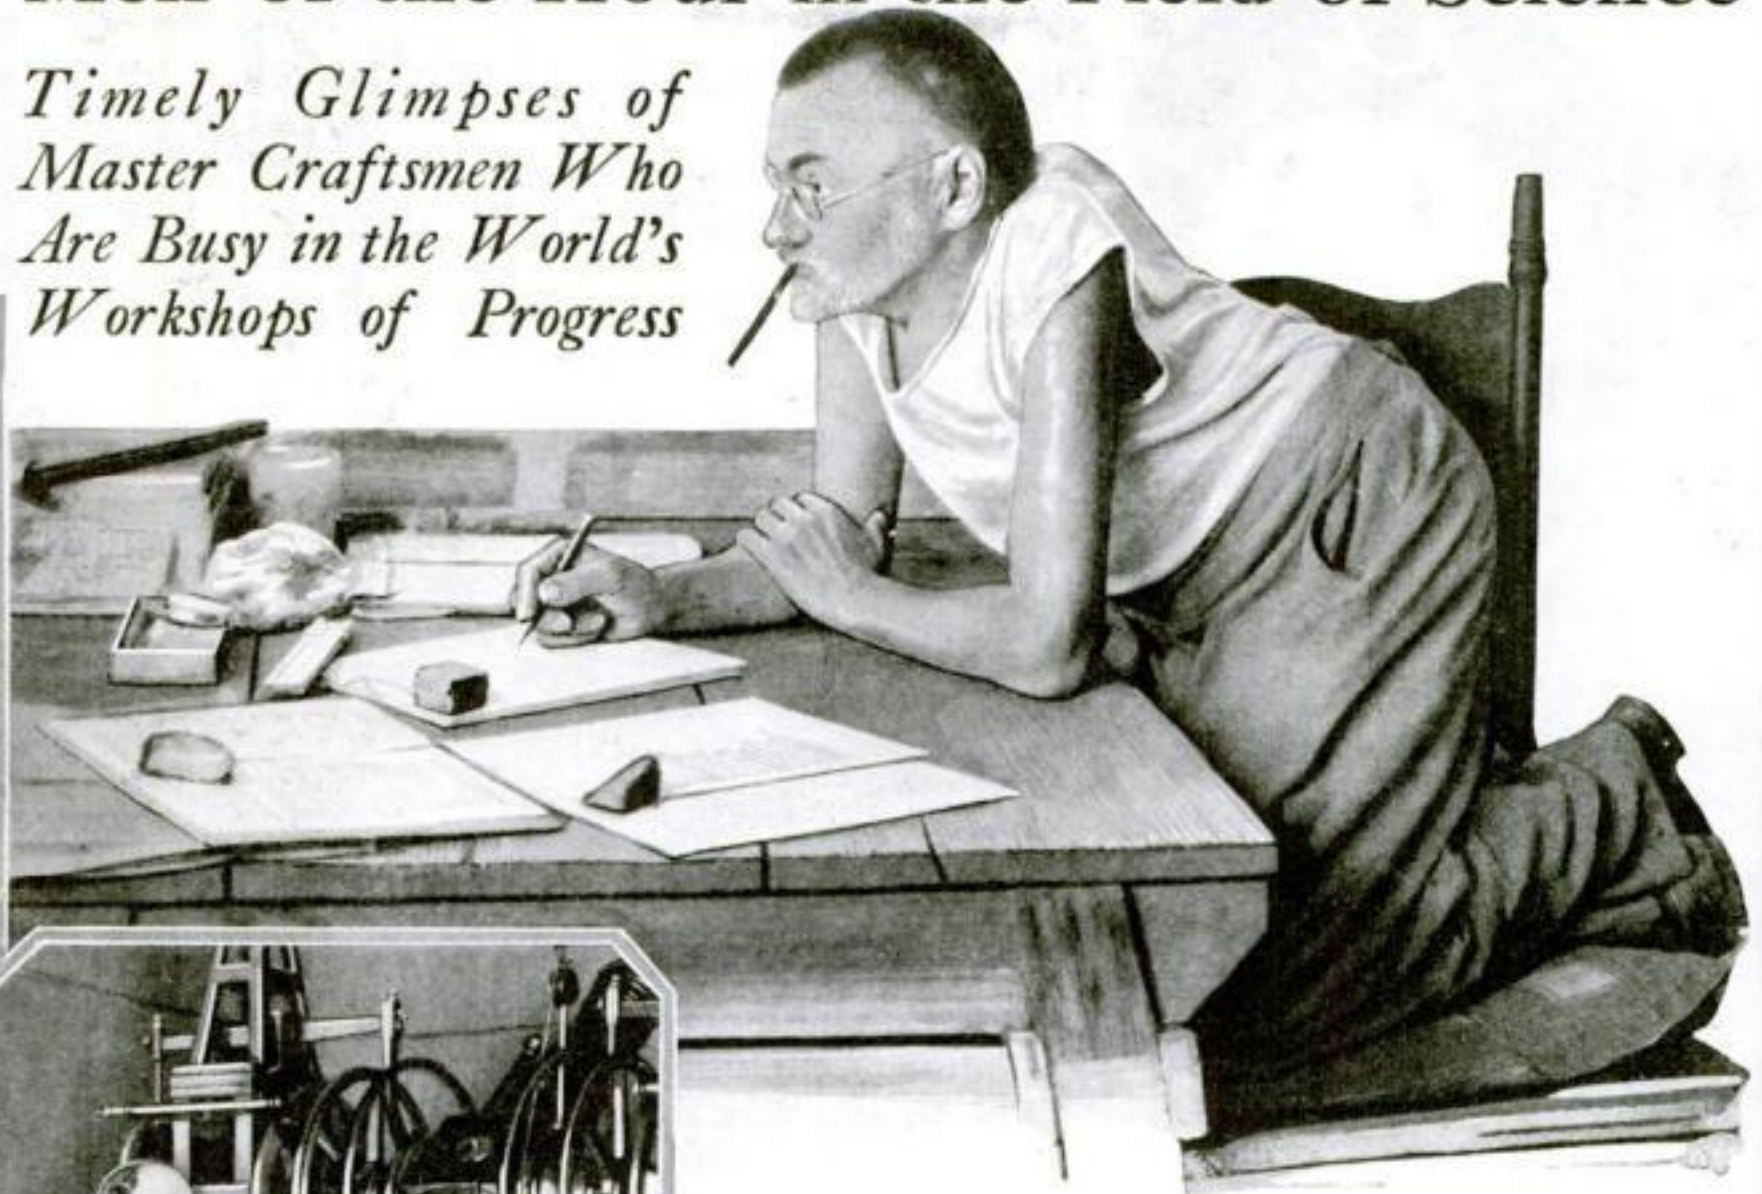

DR. CHARLES P. STEINMETZ, world-famous electrical wizard. In a recent remarkable prophecy of the world in 2023, he declared that we are on the threshold of an age that will witness a greater flowering of man's ingenuity than the 100 years through which we have just passed. He predicted that the time is coming when there will be no long, back-breaking drudgery and when people will work not more than four hours a day.

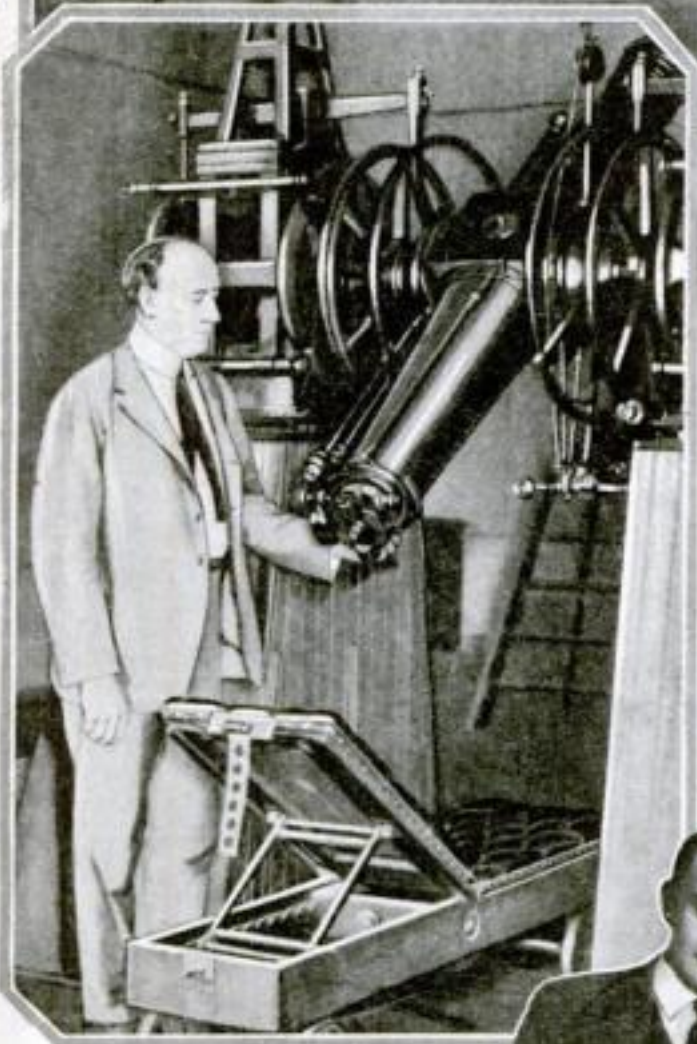

F. J. TURQUAND, London mining engineer (seated below), has perfected a delicate instrument to test milk by making impurities audible over the telephone. He is shown demonstrating his apparatus which, he says, is valuable also in detecting deadly choke damp in coal mines, thus preventing disastrous explosions.



DR. RALPH H. MCKEE, Professor of Chemical Engineering and Chemistry at Columbia University. He has developed a new method of manufacturing "intarvin," an artificial fat, the new remedy for diabetes discovered by Dr. M. Kahn.

PROF. J. C. HAMMOND, astronomer of the Naval Observatory, Washington, D. C., working at a six-inch transit circle with which he tells the accuracy of time. He claims to have proved that clocks do not run faster at night than in the daytime—a question much discussed by astronomers.





"For the ear to desire
pleasant sounds is natural."
Mencius-

There are no sounds more
pleasant than the music brought
by the


GREBE

Broadcast Receiver-
Doctor Mu.

REGENERATION and Tuned Radio Frequency Amplification find their first successful combination in this Receiver. The 20-foot silk-covered wire, readily concealed behind the picture moulding, is the only antenna required.

The attractively finished walnut cabinet has compartments for all necessary batteries.

Write for "GREBE Radio in the Well-Appointed Home"

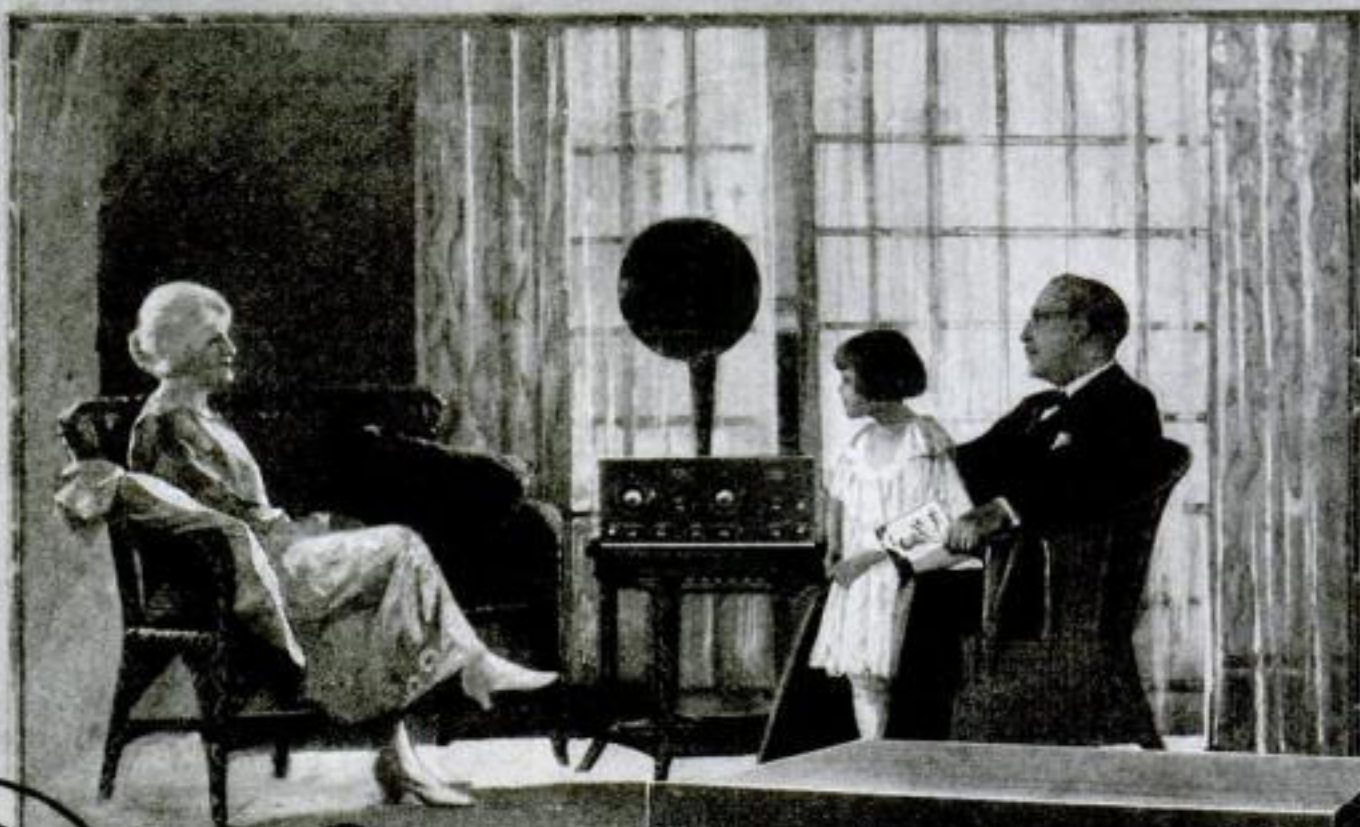

GREBE RADIO

A. H. GREBE & COMPANY, Inc.
Richmond Hill, N.Y.
Western Branch, 451 East 3rd St., Los Angeles, Cal.



Licensed under Armstrong
U. S. Pat. No. 1,113,149

Type CR-12



POPULAR SCIENCE MONTHLY

SUMNER N. BLOSSOM, Editor

December, 1923



Will the ZR-1 Discover a Polar Paradise?

HERE is one of the most astounding stories of scientific possibility ever published.

Commander Green's exclusive article has all the pungency of romantic fiction; at the same time it is founded on the scientific observations of a veteran arctic explorer, and corroborated by fascinating legends of the Eskimos.

Not since the days of Columbus has any venture held such power of gripping the world's imagination as the proposed voyage of the ZR-1.

In the issue of *POPULAR SCIENCE MONTHLY* for November, 1920, the prophecy was made that "a huge dirigible of the Zeppelin type will enable the explorer of the future to study the geography of the poles in a really scientific way." Now this promise is to be fulfilled in the projected transpolar flight of the new navy dirigible next summer. What will be the outcome?

Commander Green's entrancing picture of a balmy polar paradise represents, he says, simply a tremendous possibility of arctic aeronautic exploration. In his article he sets forth the facts as he has gathered them. Whether you agree with his theory or not, you will find it absorbingly fascinating.

By Lieutenant-Commander Fitzhugh Green, U. S. N.

IN THE proposed transpolar flight of the huge new navy dirigible, the ZR-1 (the *Shenandoah*), next summer, lies the most thrilling possibility that ever faced a single body of explorers:

In the center of the unknown area of the Polar Sea may be discovered a vast continent heated by subterranean fires, and inhabited by the descendants of the lost Norwegian colony of Greenland!

So wild is the idea as to tax the most gullible imagination. Yet it is vividly encouraged and supported not only by history and tradition, but by the searching test of scientific analysis.

Witness the astounding facts:

Within boundaries of the Polar Sea spreads the greatest unexplored area on the surface of the globe: 1,000,000 square miles on which no human eye has gazed! Look at the map on page 31. Most of this enormous wilderness lies on the Alaskan side of the Pole. On the European side lies Iceland at a point corresponding roughly to the center of the unknown area opposite it across the top of the world. This fact is significant.

Experts are in nearly unanimous agreement that a new arctic land will be found by the ZR-1. Doctor Harris, the tidal expert in Washington, D. C., long ago declared that the data he had worked out from polar ocean currents all convinced him that the existence of a large land-mass near the North Pole is indisputable.

Add to this the array of evidence geologists adduce on the basis of terrific volcanic activity along a well-defined line leading up the North Pacific, through the

Japanese archipelago and the fiery Aleutians, and onward toward the Pole. This seismic axis plotted on the globe nearly bisects the unknown area of the Polar Ocean. Further, were this line swung through 180 degrees, it would touch Iceland, one of the most fiercely volcanic spots on earth. Another significant fact.



Will the ancestors of the Lost Colony of Vikings who mysteriously vanished from Greenland centuries ago be found inhabiting a steam-heated polar continent? Eskimo tradi-

tion paints in vivid terms the White Men swarming suddenly northward to a wonderland the natives long had known—a land of endless summer, rich in vegetation and game



The giant new navy dirigible ZR-1 in test flight. If she makes the voyage across the North Pole next summer, it will prove, according to Vilhjalmur Stefansson, famous arctic explorer, "one of the turning points in history"

Still more: Not many years ago, in a particularly open season, the American whaler, Captain Keenan, reported he saw land northeast of Point Barrow. Peary, from Cape Thomas Hubbard, sighted distant peaks northwest. Such evidence is incontrovertible. The new continent seems already within our grasp!

So much for the land-mass. Now for its probable inhabitants.

Eric the Red discovered Greenland in 985 A.D. He brought back glowing tales of grassy fiords, long sunlit days, game-infested hills, ice-panes groaning under their burden of fat seals, bays teeming with fish.

Vikings Prosper

Colonization began at once. And so true did Eric's bright tale prove that the Vikings greatly prospered. In the archives at Bergen may be seen today the receipts for their princely contributions in ivory and oil to the ill-fated Crusades.

The last ship known to have returned to Norway from her arctic colonies arrived in the year 1410. We read that it brought a rich cargo; that its report was of happy, thriving Norsemen back north; of health and growing independence despite their rigorous environment.

Then, as in 1914, Europe became a shambles. Plague and war swept civilization. Pestilential disease ran a ghastly race with a horde of human murderers. Greenland fell out of the minds of man. Even the sea route north was forgotten. . . .

Lost Colony a World Riddle

Dark ages passed. Slowly Nature bred again in men the will to search her world for knowledge and for wealth. Greenland was rediscovered. Hans Egede established the first modern settlement there in 1721. But the grim report he made was tragic beyond belief:

The Norwegian colony, 10,000 people—perhaps 100,000—had, to a man, mysteriously disappeared!

"The greatest riddle in the history of the world," it has been called—the baffling mystery of the lost Norse colony.

Where did they go?

Where didn't they go is a question more easily answered. Not to sea in ships, for they had but one or two; and Greenland, lying above the tree-line, gave them no timber for building more. Not slain by Eskimos, for Eskimos are the most peace-loving people in the world, knowing nothing of the art of war. Not,

An Adventurer in the Icy Desert

"WITH my own eyes I have seen in Greenland the ruined stone houses of the lost Norwegian colony," writes Commander Green. "With Donald B. MacMillan I have tried to reach the polar continent, believed to lie in the Polar Sea north of Canada."

As an arctic explorer of wide experience, Commander Green—now aid to Admiral Williams, President of the Naval War College at Newport, R. I.—has made an exhaustive study of the fascinating possibilities of discovery of which he writes. Following his graduation from the United States Naval Academy at Annapolis, he joined the Crocker Land Arctic Expedition as engineer and physicist in 1913. He spent 3½ years in the polar regions.

In the spring of 1914, with MacMillan and two Eskimos, he sledged more than 1000 miles up across Ellesmere Land and out into the Polar Sea in search of land that tidal experts insist must lie in this million square miles of unexplored area. They also explored an unknown portion of Axel Heiberg's Land.

The next year, after their relief ship had become imprisoned in the ice of Smith Sound, Commander Green, with two other members of the expedition, sledged south, passing down the uninhabited portion of the Greenland coast and reaching the Danish colonies five months later, in the spring of 1916. Reaching New York by way of Copenhagen in the autumn, he joined the Atlantic Fleet on regular duty. The following spring he became Flag Lieutenant to Admiral Rogers in command of the division of United States battleships attached to the British Grand Fleet in European waters.



Lieut.-Com. Fitzhugh Green, U. S. N., from a photograph taken in the Arctic

like Europe, swept by some dread germ of awful virulence, for germs don't thrive in polar regions.

What then?

Examine the Eskimo tradition: It paints in vivid terms the White Men swarming suddenly north to a wonderland the natives long had known. Because of evil spirits, no Eskimo had ever dared this trail.

"The land is warm; is clothed in summer verdure the year around; is populated by fat caribou and musk-ox. It lies,"

they say, even to this day, "in the direction of the coastal trail-route north."

This route is that taken by our American expeditions. Peary, Kane, and Hayes all used it. It always has been the easiest route as well as the most productive of natural food in seal and walrus. For our explorers it has been a hard trail. But for the Norwegian colonists whose forebears had spent 10 generations north of the arctic circle it must have been less difficult to travel than were the western plains for our American pioneers.

Lured Northward


Picture the terrible situation in which the deserted Norsemen in Greenland found themselves: No outlet for their trade. No source of supply for the little but indispensable luxuries of life. No access to friends and families back home.

A generation—two, perhaps—of heartbreak and of longing; unhappiness goading the younger men

to travel northward. Perhaps a route to southern lands lay that way.

Suddenly like a bombshell breaks upon the weary colony the wonderful news: "We've found a polar paradise! Sunshine! Game! Grass! One moon's easy journey north! A short lap on the sea ice! Come!"

What had they to wait for? A century had passed since the last ship sailed. The last man who had seen a real Norwegian had died. The homeland was but a myth. So they "packed and, singing songs, departed," the native legend puts it,

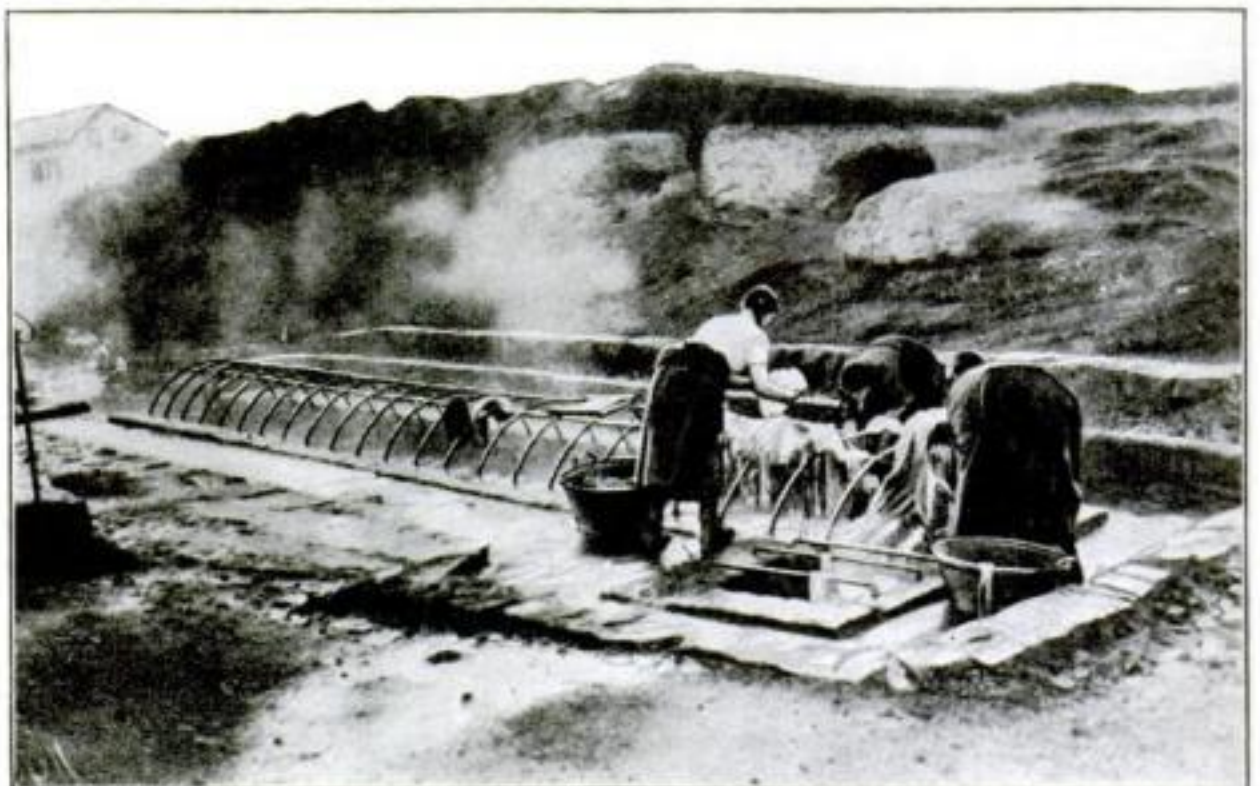

Washday in Iceland, where hot springs and boiling mud abound. An engineering scheme for steamheating the whole island by harnessing its steaming geysers has been projected recently. It is no idle dream, says Commander

Green, to believe that Iceland has a geographical mate on the opposite side of the Pole—a polar continent of mild climate and luxuriant vegetation, warmed the year round by hot springs and geysers.



Our artist's conception of the discovery of a possible "polar paradise" by the ZR-1, based on Commander Green's imaginative article. This land, the explorer believes, may be about the size of the state of Pennsylvania, and may be encircled by a lofty, volcanic range of

mountains buried in eternal ice and snow. Behind a veil of fog may lie a fertile plateau where heat from hot springs, geysers, and boiling pools defies the cold. The illustration shows the possible habitations of the modern descendants of a vanished race of Norsemen

"suddenly to the northward." They never returned. This fact is not at all surprising if what we think is true—that they found a land of milk and honey in the very center of the polar pack. And it is perfectly logical to suppose that their descendants will be found up there next summer by the dirigible ZR-1, in dramatic isolation.

Go back to the scientific data on which we base this amazing assumption. Iceland's collection of volcanoes is unsurpassed. She has 107 major craters within her tiny limits, and thousands of minor ones. Iceland's climate is temperate despite its arctic situation. The peace, the health, and the prosperity of Iceland's inhabitants were sustained by its natural warmth during the 200 years of isolation from Europe that it suffered at the same time and for the same reasons that the Greenlandic Norsemen were deserted.

Moreover, Iceland's lava flows are by no means always from conventional craters. The greatest of

them have come quietly from fissures in the level land. We may deduce that subterranean fires smolder near the surface. It is not uncommon for the inhabitants to be forewarned of eruption by sudden melting of the snow and ice.

Hot springs and boiling mud are found in every part of Iceland. There has been projected an engineering scheme for heating the whole island by harnessing its steaming geysers.


In this connection it is interesting to compare the mean annual temperature of Iceland—34° F.—with that of Greenland at the same latitude—minus 15° F. During the summer Icelanders enjoy a



This map shows the proposed transpolar air route of the ZR-1 from Alaska to Norway. Cutting the distance to European and Asiatic capitals from 11,000 to 5000 miles, this route would pass across what many geologists believe to be an unexplored polar land on the opposite side of the Pole from Iceland. The curving dotted line indicates the possible route which the "lost Norsemen" may have followed to this imagined arctic wonderland



How the barrier mountain range of the new land may appear from the distance

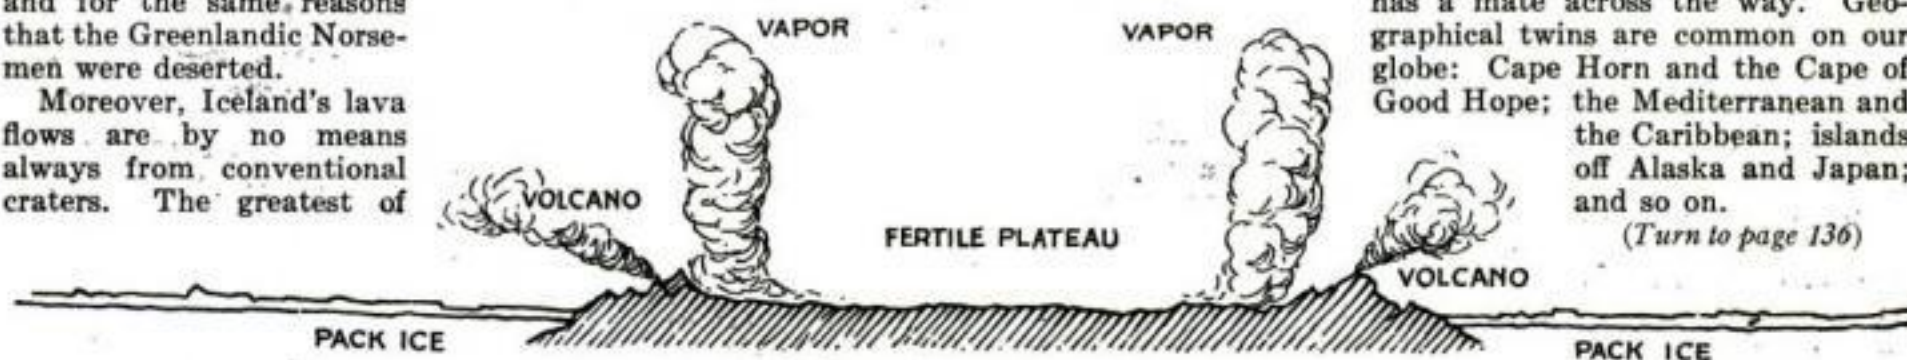

Commander Green's own idealistic drawing, showing a cross section of the imagined arctic continent—an undulating, fertile plateau, steam-heated by hot springs, geysers, and boiling pools and rimmed by a volcanic range of mountains. Behind this barrier rises a veil of vapor

period quite comparable to that of our own New England States. Averages run up to 60° F.

It is no idle dream to claim that Iceland has a mate across the way. Geographical twins are common on our globe: Cape Horn and the Cape of Good Hope; the Mediterranean and the Caribbean; islands off Alaska and Japan; and so on.

(Turn to page 136)

Can Man Rob Earthquakes of Their Terror?

By R. E. Martin

WHILE Japan clears the wreckage of the cities of Tokio and Yokohama, leveled by the recent earthquake, the forces of science are being marshalled to find a way to prevent repetition anywhere on earth of what is now known to have been the most terrible disaster in history.

Not that science hopes to prevent other earthquakes. These cataclysms of nature undoubtedly are due to structural changes in the earth itself, and are consequently beyond the power of man to control. But science does expect in time to remove the chance of any such terrible loss of life and property as marked the Japanese catastrophe.


Means of forecasting earthquakes so that the inhabitants of a threatened area may flee in safety before the quake arrives, and the construction of earthquake-proof buildings—these are the goals toward which science is working. In the opinion of leading scientists the day is not far distant when people may live in larger security in places like Japan where earthquakes are of frequent occurrence.

4000 Earthquakes a Year

The tremendous importance of this task in which some progress already has been made is evident when we consider that 160,000 earthquakes actually have been catalogued and that about 4000 earthquakes are felt each year in different parts of the world.

Probably the most important work that has been done in the observation of the causes and nature of earthquakes has been accomplished since the beginning of the twentieth century. Previously all earthquakes were generally regarded as being of volcanic origin. Scientists now believe that most earthquakes are caused by wrinkling and slipping of part of the earth's crust, caused by strain resulting from shrinkage of the more plastic interior of the earth, contortion of the earth's strata, or changes in pressure in the crust itself. However, in some cases, subterranean volcanic action is believed to have been the cause of certain quakes.

The crust of the earth may be considered as a relatively thin skin or rind of rock, about five miles in thickness. As stone broken in a quarry splits along certain definite lines, so this outer covering of the earth tends to split along lines of weakness which geologists know as "faults." Variations in pressure—which may be caused by the weight of moun-

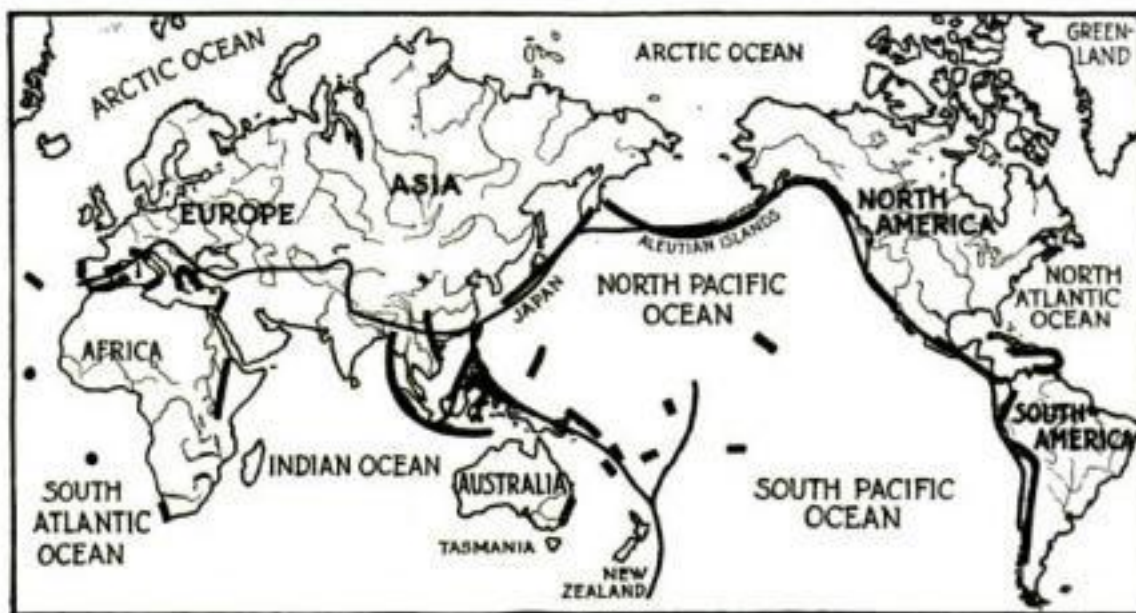

The black lines mark earthquake zones that girdle the world, forming narrow belts of potential disaster. Note that the United States, except for the Pacific Coast, apparently is free from danger of quakes. The most unsettled part of the earth's surface is

the western shore of the Pacific Ocean. This map was prepared by Prof. F. Omori, head of the Imperial Earthquake Investigation Committee of Japan, who nearly two years ago made the forecast that severe shocks would be experienced within six years

the friction between the blocks, something will give. They will buckle, and the buckling will correspond in a way to the movement of the earth's crust that causes an earthquake.

The most unsettled part of the earth's surface is the western shore of the Pacific Ocean. Here the crust is being thrust upward, giving rise to steep slopes. It was such a buckling of the earth's crust along the cracks believed to exist in the bottom of the Tuscara Deep, off the coast of Japan, that caused the recent disaster, according to theories so far ad-

vanced. The proximity of the Japanese coast to this great trough-like "deep," which goes down more than five miles, and the numerous earthquakes experienced by Japan, lend weight to the theory that pressure exerted by this tremendous volume of water is the cause of such disturbances.

Earthquakes under the sea are called seaquakes. So tremendous are the waves that they can travel at a rate of four or five hundred miles an hour, and still be detected after a journey of more than 10,000 miles.


Earthquakes are known to have occurred in the eastern part of the



How the recent earthquake in Japan split and crumbled the Tokio-Yokohama highway near Kawasaki, opening great gaps

tains or of the water in the ocean—cause movements or dislodgements between the sections of crust, which, of course, are constantly seeking to remain in equilibrium.

The situation may be compared with a row of building blocks, laid side by side and subjected to pressure from both ends. When the pressure becomes too great to be resisted by

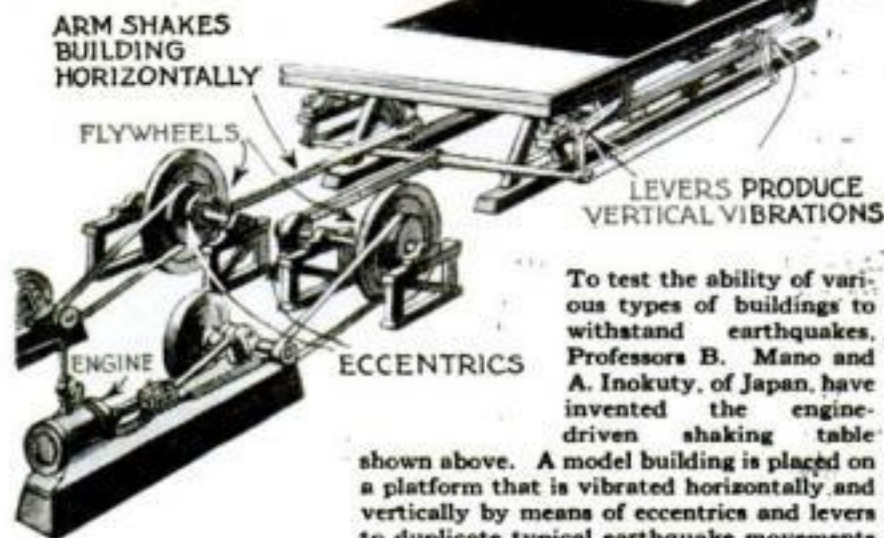

To test the ability of various types of buildings to withstand earthquakes, Professors B. Mano and A. Inokuty, of Japan, have invented the engine-driven shaking table shown above. A model building is placed on a platform that is vibrated horizontally and vertically by means of eccentrics and levers to duplicate typical earthquake movements



A SUDDEN FRACTURE



A scene of appalling devastation along the waterfront of Yokohama, following the terrific earthquake and tidal wave of September. Scientists believe now that most earthquakes are caused by the

VOLCANIC ACTION



fracture and slipping of the earth's crust as the earth contracts (see diagram at the left). Some quakes, however, are believed to be the result of subterranean volcanic action, as shown at the right


United States at various times, but science scouts the notion of any quake of a devastating sort ever visiting any but the western coast of America.

Following the Japanese shock, Dr. Bailey Willis, emeritus professor of geology at Stanford University, asserted unequivocally that man and not nature is to blame for the disastrous consequences of earthquakes in localities like Japan, Chile, and California, which are known to be in the earthquake zone. His statement was based on observations in Chile, where he had been investigating causes of earthquakes for the Carnegie Institution of Washington, D. C. He pointed out that it is not the earthquakes themselves—the actual ground tremors—that cause the frightful loss of life, but the events that follow the quakes—the falling of masonry, the fires, the floods from reservoirs and similar things.

"To construct a house that will withstand an earthquake is not difficult if you can command the right materials and good carpenters," says Doctor Willis. "A point that has not been recognized generally by architects or engineers is that it is the earth that moves, while the house tries to stand still. If you could put a ball bearing between your house and its foundations, it would be safe in time of earthquake. This idea is embodied in every instrument for recording earthquakes and was applied many years ago by Sir John Milne to the construction of a

WHAT'S INSIDE THE EARTH

Recent study of earthquake waves has led to new scientific discoveries indicating that the earth's interior may be divided into three definite zones—a rigid, elastic outer shell; a semirigid metallic intermediate zone, and central non-rigid core. This theory is deduced from seismographic records showing that the course of earthquake waves through the earth is curved toward the surface; therefore that the earth is denser and less rigid at its center. The three zones of the earth's interior are indicated in the illustration, which shows how volcanic outbursts throw up millions of tons of dust that travels entirely around the earth

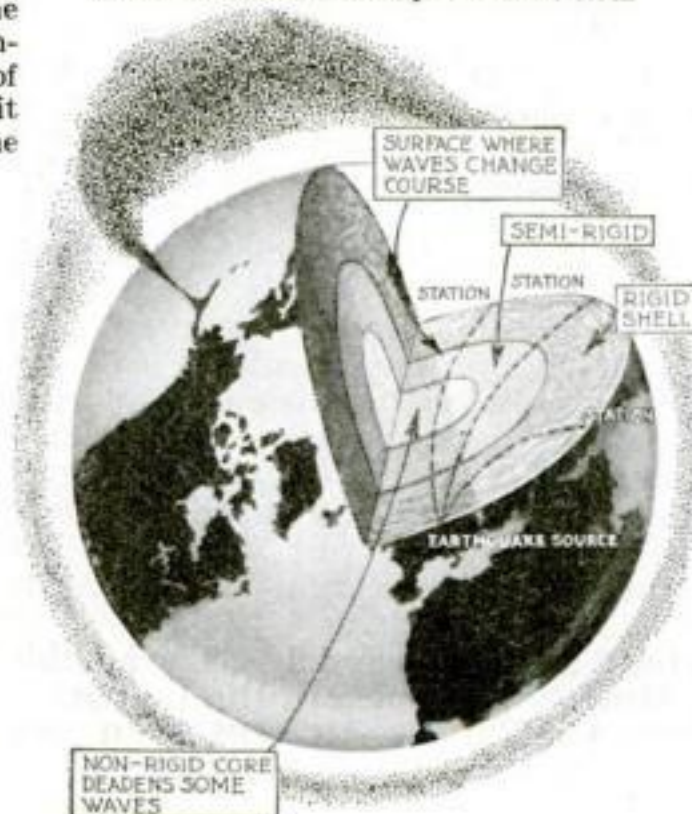

lighthouse in Japan. I believe it can be introduced successfully in some combination of bearings, springs, or shock absorbers.

"For the ordinary house a broad ditch packed with cobblestones on which there rests a well braced frame of heavy beams would not be a bad substitute. It would allow the ground to slide around under the house, which could be jacked back into position with reference to such unstable things as trees, garden walks, and roads at your convenience."

Doctor Willis adds that the displacement within the earth that results in rock slips that science now regards as the cause of earthquakes is developing below the surface for months before the quake occurs. This displacement usually does not actually reach the surface, but produces vibrations or waves that can be recorded by special instruments as a means of obtaining forewarning of the coming quake. The vibrations travel great distances at high velocity before they die out.

"The instruments will have to be set up in many places," said Doctor Willis, "and records kept for years before the science of predicting earthquakes is set on a firm basis. I think it is not at all unlikely that in the future earthquakes can be predicted much as the weather is predicted now. Warnings can be sent to threatened districts and measures taken by the populations to save themselves."

The Story of the Mind

The Most Fascinating Psychological Series Ever Published

By James J. Walsh,
M.D., Ph.D.

AS A physician I have always been inclined to think that whenever anybody dies of typhoid fever, somebody ought to be hanged, because there has been criminal negligence somewhere; some one has permitted contaminating materials from a typhoid patient to get into the food or drink of a healthy person.

Banish Fear and Ignorance

It is the same sort of crime for human beings to allow their efforts to be palsied by dread of failure. It is criminal to allow the initiative to be hampered by lack of confidence; to restrict the display of energies just because of a lack of self understanding. This can be prevented by realizing that what one individual can do, others can do, and that the only reason for failure is lack of knowledge of personal powers and neglect to use them.

"But how may I acquire this knowledge?" you may ask. The answer is simple—through psychology.

And what is psychology? *Psyche* is a Greek word, meaning "mind," and *logia* is another, meaning "knowledge." Psychology—frequently misunderstood and generally cloaked in long, mysterious words—is simply knowledge of the mind. One of our newest sciences, it has a more intimate personal appeal and offers a wider application in practical usefulness to you and to me than almost any other science, old or new.

It brings us knowledge of our own minds—the way in which they work, their powers, capabilities, possibilities, and shortcomings. And, what is more important, it shows us how to make practical use of this knowledge—how to find greater happiness, health, and power through our hidden mental resources.

Why Men Fail

A great many men fail in life, not because they lack talent, but because they fail to employ their minds properly; because they do not realize or use the qualities they possess. When critical emergencies arise, men often prove to have hidden genius for leadership and unsuspected power of accomplishment.

Who ever heard of Marshal Foch before the war? Only a few professors of military science who knew him as a



Dr.
James J.
Walsh

writer of textbooks on tactics and strategy. That was all. But he proved to be one of the greatest men of history, capable of lending something of his own soul to millions of men and of welding them into

a firmly knitted mass that proved irresistible in action. It took the crisis of early 1918, when the fate of nations and the future of civilization seemed to hang by a thread, to bring forth all the latent power within him. If it had not been for the Civil War, our own great General Grant would have sunk into a nameless grave after a commonplace and almost useless life. As it was, he proved one of the greatest leaders of the world's history.

War afforded the opportunity for Foch and Grant, but it did not make them. These men knew themselves. They knew the energy and power that was hidden within themselves. And they knew how to use these powers. Therein lay their greatness.

Every Task a Test

We can't all lead armies, but every task in our daily lives affords an opportunity to do something a little better than we ever have done it before, or to do it in a new way. We succeed or we fail according to whether or not we know our own mental powers and how to use them.

Of 10 men who crouch at the starting line in a foot race, only one can win, though they all have had equal training and practice in running. The winner possesses

natural advantages in speed and stamina that training and practice will not supply to the others. But through training and practice, through developing the best there is in them, all 10 probably have learned to run faster than any of those who watch the race from the grandstand.

So it is with psychology. Learning to draw on the hidden powers of your mind and to put them to use may not enable you always to outstrip those with superior mental gifts. But undoubtedly it will give you a tremendous advantage over those who merely sit by idly, unconscious of the well-spring of power that is within themselves.

Psychology the Key

The aim, then, of practical psychology, or the knowledge of yourself as applied to yourself, is to enable you to bring out and use what is best in you. An understanding of it may mean the difference between success or failure in your life.

Psychology is the key that will open the door to the wondrous storehouse of hidden powers contained in your mind, and in the series of articles that I am about to begin in POPULAR SCIENCE MONTHLY, I shall endeavor to put that key in your hands.

AN ABSORBING story, which in its wonderful scope staggers imagination itself, is "The Story of the Mind," to be told by Doctor Walsh, beginning in the next issue. On this page the famous American surgeon and psychologist tells why he is writing the series for POPULAR SCIENCE MONTHLY.

In it for the first time a scientist of distinction will tell us in simple, non-technical words that may be grasped by anybody, how to obtain happiness, health, and power through the hidden resources of the mind.

Doctor Walsh's psychology is the psychology of business, the home, and every-day life. With fascinating fact and parallel he demonstrates that we may put our thoughts to work for definite external ends. And—he shows us how to do it.

Doctor Walsh's first article, "The Machinery of the Mind," will appear in the January issue of POPULAR SCIENCE MONTHLY, on sale at your newsdealer's, December 10.



Divers Battle Hungry Sharks to Spear Sunken Gold

IN THIS picture our artist portrays vividly the dramatic adventures of divers in their hunt for the \$30,000,000 of golden treasure that dropped into the ooze of the ocean bed when a German submarine sank the White Star liner *Laurentic* off the Irish coast during the war.

Battling ferocious sharks with knives, 90 feet below the surface of the sea, these

intrepid deep-sea hunters have succeeded in recovering all but 30 bars of the gold bullion that was being carried to American bankers when the *Laurentic* went to the bottom.

As they grope among the bones of the sunken ship, the divers use a sensitive divining spear, with galvanometer dial attachment, to prod for the golden bars in the mud and silt. Whenever the spear

strikes a metal object, the clocklike dial aboard the salvaging ship *Racer*, indicates whether the spear point is touching gold or a base metal such as iron. The diver then receives his directions by telephone from the salvaging ship. The gold bars, as they are located, are raised in a tub.

In this way nearly 3000 gold bars, worth from \$5000 to \$10,000 each, have been salvaged from the deep.

His Hobby—a Two-Mile "Vest Pocket" Railway

How W. Cecil Gage Built a Toy Road from Odds and Ends

By Raymond J. Brown

SEVEN years ago W. Cecil Gage, then an insurance broker in New York City, attempted to retire from business. He removed to a country estate at Fishkill, N. Y., and prepared to settle down to the life of a country gentleman.

But his attempt to retire proved unsuccessful. Through an odd combination of circumstances he has gone into the railroad business. He owns and operates probably the most remarkable railroad in the world—a complete miniature system, with two miles of track. And every inch of that track, every one of the nine pieces of rolling stock that pass over it, he built himself almost entirely from secondhand materials.

An Economical Road

The gasoline motor that drives the locomotive, the car wheels—narrow-gage trucks of the type used for mine cars—and the strap-iron reinforcement on the wooden rails represent the only purchase Mr. Gage made in the construction of his railroad. Everything else—cars, rails, ties, switches, and the single trestle that bridges a brook—is made of discarded lumber and metal, picked up around the estate.

Started as a convenience and pushed to completion as a hobby, the Gage narrow-gage road, which its owner calls the "Cecilwood Vest Pocket Railroad," now is a commercial enterprise, paying substantial dividends from passenger fares. At the same time it serves its original purpose of supplying a swift and convenient means of carrying farm products, fuel, and similar materials around the Gage estate. From every part of the country surrounding Fishkill, by motor, foot, trolley, rail, and ferry, almost a constant stream of persons of all ages pours into Cecilwood to make the circuit of the big Gage farm in the tiny cars. Mr. Gage estimates this year's mileage

record of his little road to be well above 10,000.

The Vest Pocket Railroad owes its construction to the difficulty Mr. Gage encountered in disposing of the ashes from his household furnace during his first winter in Fishkill, when he found it necessary to carry the ashes about a quarter of a mile to dump them. Although he never before had tried to build anything, he constructed a little car, similar to a



W. Cecil Gage at the throttle of his eight-horsepower gasoline locomotive, taking members of his family for an afternoon ride

"THERE was a time," says Mr. Gage, "when I wondered what value my friends could derive from their endless pursuit of golf, fishing, photography, working with tools—whatever it was they rode as a hobby. Now, though, I understand; for from my railroad—my first and only hobby—I have taken more enjoyment and valuable recreation than anything else ever has given me."




Approaching one of the eight switches of the "Cecilwood Vest Pocket Railroad." The rails are made from two-by-fours from a dismantled henhouse, while the ties are from floor beams of the same building

railroad flat car, in which to haul the ashes. Then, because uneven ground made the operation of this car decidedly unsuccessful, he conceived the idea of running his car on rails.

These rails he constructed of "two-by-fours" that had formed the framework of a dismantled henhouse, and he mounted them on ties sawed from the floor beams of the same structure. During that winter his ash car, which he pushed back and forth with a pole, did valiant service. Meanwhile the ashes were utilized as ballast for the newly constructed tracks. In the spring Mr. Gage extended his tracks another quarter mile or so and built a second car. Both of the original cars are still doing freight service.

The necessity of conveying farm products, fodder and fuel to the various parts of the estate caused Mr. Gage to extend his rail lines still farther until at last there was so much

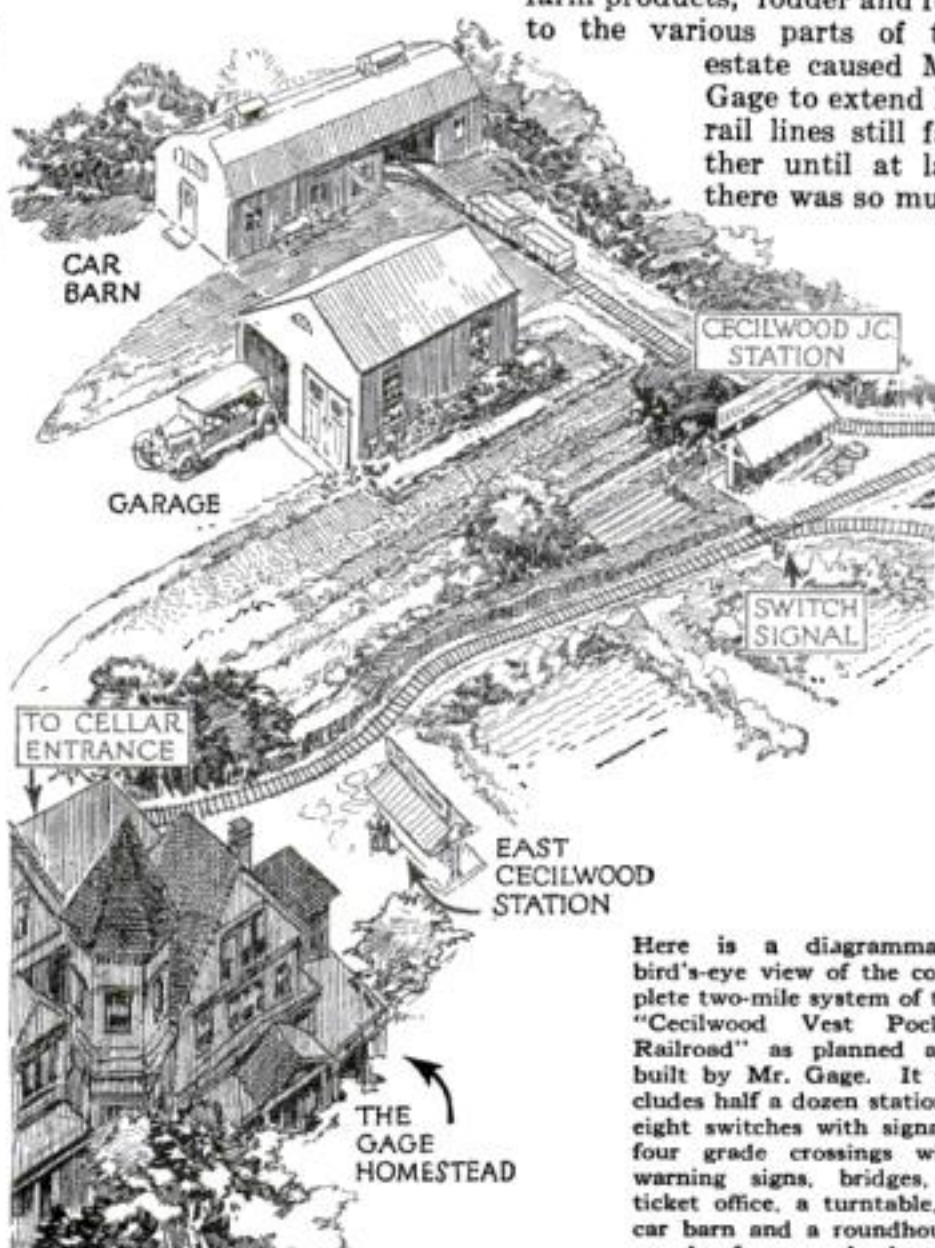

Here is a diagrammatic bird's-eye view of the complete two-mile system of the "Cecilwood Vest Pocket Railroad" as planned and built by Mr. Gage. It includes half a dozen stations, eight switches with signals, four grade crossings with warning signs, bridges, a ticket office, a turntable, a car barn and a roundhouse made from a henhouse



Hauling in the winter supply of firewood on midget flat cars

track that a locomotive was necessary. For a power plant for this locomotive, he bought an eight-horsepower gasoline motor of the type used to operate railroad hand cars. This proved successful in operation, and soon the task of extending and improving his little railroad became Mr. Gage's absorbing hobby, occupying all his spare time.

Little by little the road grew during the six years that followed, until now it has two miles of track, five passenger cars, two flat cars, a freight car, eight switches, four crossings, equipped with warning signs; a turntable, a snow plow, a ticket office and a half dozen stations. At night or during severe weather the rolling stock is run into a long chicken house, which serves as an adequate "roundhouse."


A Marvel of Amateur Workmanship

The entire system is a marvel of careful, patient workmanship and ingenuity in utilizing waste materials. It is especially remarkable for the fact that it was conceived and built by a man who had no previous skill nor training in the uses of tools. Mr. Gage asserts that he never could have done the work for pay; with him it was a fascinating hobby—a labor of love—and in consequence it received his best efforts.

Two of the cars are constructed of the wood formerly used to board up the windows and doors of the Gage home in New York while the family was away for the summer. The other cars were made of old doors, packing cases, and the partitions of demolished farm buildings. Since Mr. Gage did not possess a machine shop he had to



Visitors flock to Cecilwood to ride around the big Gage farm in the tiny passenger cars

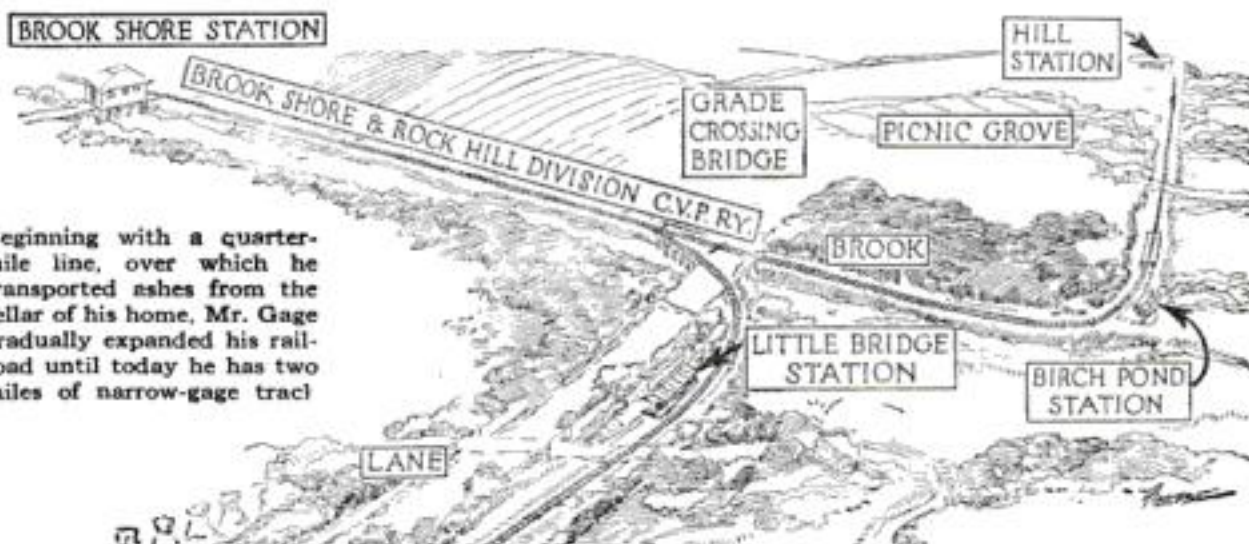

Beginning with a quarter-mile line, over which he transported ashes from the cellar of his home, Mr. Gage gradually expanded his railroad until today he has two miles of narrow-gage track

Although several thousand persons have made the trip around the picturesque Gage property in the Vest Pocket Railroad, there never has been an accident.


For a time Mr. Gage limited the list of his passengers to relatives and friends. The general public got its first chance to ride on the Vest Pocket Road at a church picnic held on the Gage property. After this the fame of the railway system spread so rapidly and so many persons appeared with requests for "rides," that Mr. Gage decided to accommodate all comers who were willing to pay the tariff.

Finds Happiness in His Hobby

"It wasn't the money I did it for," he says, "but with my road earning a little, I felt sort of justified in spending all my time on something that was merely a hobby and plaything. My railroad is the first real hobby I have ever had. There was a time when I wondered what value my friends could derive from their endless pursuit of golf, fishing, photography, working with tools—whatever it was they rode as a hobby. Now, though, I understand; for from my railroad—my only hobby—I have taken more happiness and enjoyment than anything else ever has given me."

So now the Vest Pocket Road runs on a definite schedule every day. And since Mr. Gage is at once engineer, conductor, passenger agent, traffic manager and repair crew, he asserts that the "retirement" which he went to Fishkill to find is largely figurative.

Operating the train and keeping the system in repair engage him from morning to night, seven days a week. He declares that he has less leisure time now, in his "retirement," than at any stage of his business career.

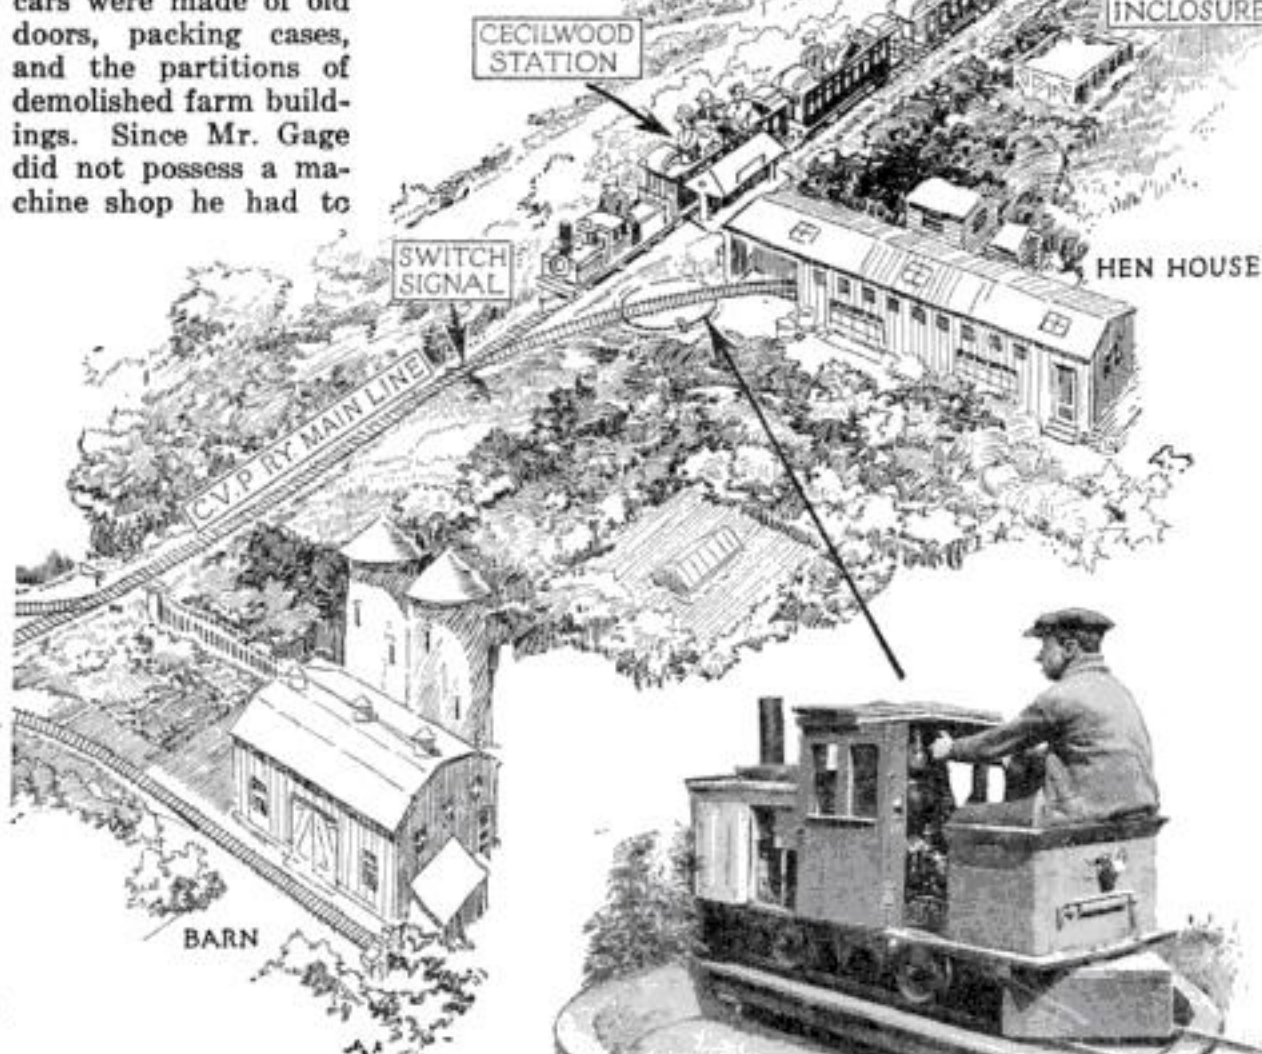

Gage and his locomotive on the tiny "roundhouse" turntable. Note the automobile spotlight that serves as the rear light; also the pipe smokestack

call on a Fishkill garage and the local blacksmith for aid in gearing the motor of his locomotive to the axle; but all the rest of his railroad represents the work of his own hands, aided by an ordinary kit of carpenter's tools.

The rails, 14 inches apart, are painted and tarred and protected on their inner top edges by strap iron. Except for the metal strip they are of wood. Comfort for

the passengers is assured by elliptical springs on which the seats are mounted. The cars are about five feet long. Each is mounted on four eight-inch wheels, the axles being set close together to enable the cars to take curves without overturning.

GIANT EXCAVATOR DIGS FROM ABOVE



EXTRAORDINARILY rapid excavation is accomplished by this giant dredging machine recently invented in Holland. Instead of working in the hole

and passing up the diggings, as does a steam shovel, its scoops go down in an endless chain after the earth and bring it up, emptying it into waiting cars.

METAL GARAGE WELDED TOGETHER

BY THE ingenious use of old materials, a novelty in building construction was effected in Miami, Fla., recently when a garage was built on a



Unfinished building, showing tube frame

framework of old boiler tubes electrically welded together. Not a bolt nor a rivet was used in the entire building.

The roof of corrugated iron and the sheet-iron sides were welded to the skeleton. This building, which is 18 by 36 feet, is shown here while under construction. It is planned to erect a similar building 50 by 150 feet in ground dimensions.

THE day is coming when diners will absorb electric vibrations instead of food, according to the prediction of Dr. Francis A. Cave of Boston, Mass. We'll eat our meals by attaching to our bodies apparatus connected with electric wires, he says.

HOUSEHOLD GARBAGE INCINERATOR

THE malodorous and none too healthful garbage can totters on its back-yard perch. No longer, it seems, need garbage accumulate to be carted to the public incinerator. A newly patented household incinerator consumes garbage in your kitchen as fast as it appears.

This remarkable heater creates a temperature as high as 1200° F., sufficient to destroy all combustible household waste, wet or dry, animal or vegetable. This intense heat is made safe for the kitchen by insulation consisting of a thick asbestos lining and an air space between the outer and inner walls of the heater. After the garbage is burned, the residue is a small quantity of odorless and sanitary ash, which may be kept in the incinerator until enough has accumulated to justify emptying it.

It is claimed that five cents' worth of gas is sufficient to destroy a bushel of garbage, the time required being less than one hour. On the issue of economy alone, the invention is a success.




Intense heat burns up all garbage

Soapstone Electric Iron Conserves Heat

A NEW type of electric iron has been designed to conserve heat by taking advantage of the heat-storing qualities of soapstone, a substance once used for foot-warmers, bed-warmers, etc.

The ironing surface of the invention is a relatively thin metal sole, surmounted

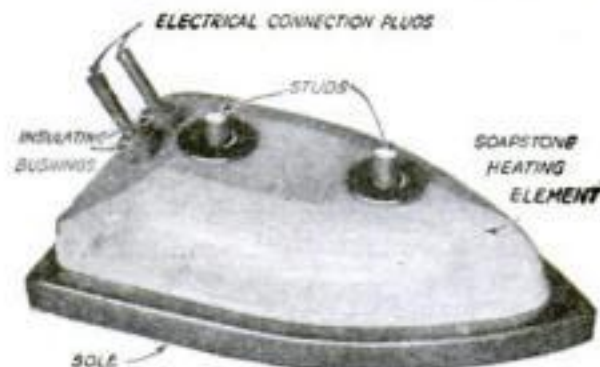

The iron with soapstone heating element

by a soapstone block into which the heat is conducted.

A close contact is provided between the soapstone and the metal sole. To protect the housewife's hand from burns,



Insulation protects the housewife's hand

a layer of air is inserted between the cover and the soapstone, preventing excessive radiation of heat upward and sideways through the cover.

It is claimed that after a seven-minute connection the plug may be removed and ironing continued for 45 minutes.

Red Flags Do Not Anger Bull, Says Scientist

BULLS are color blind; therefore, waving a red flag before a bull arouses no more anger in him than waving a pink, green, purple, or white flag.

Such is the statement of Dr. G. M. Stratton, head of the Department of Psychology, University of California, after a six-month investigation of the subject. When Doctor Stratton and his assistants waved red flags in the faces of bulls and other animals, the reaction was one of curiosity only. He is positive the entire bovine family is devoid of color sight.


AS IF fulfilling Old Testament prophecies, modern science is preparing to harness the River Jordan to rejuvenate Palestine — the Land of Promise. This gigantic engineering project will be described dramatically in next month's issue.

AIR GUN PASSES WHITE HOT RIVETS


THE danger from white hot rivets, speeding from the tongs of the heater boy and sometimes eluding the bucket of the passer, has been eliminated by the perfection of a pneumatic rivet-passing system, in which the rivets are shot by compressed air to their destination through a flexible metal hose.

Pneumatic passers now in service can send rivets for a distance of 150 feet. The metal hose may bend around corners between the passer and the discharge end without stopping the passage of the rivets.

To start a rivet on its way, the heater boy drops it upon a balanced check valve that allows it to fall into the admission end of the hose. Then, when he presses on a pedal, a blast of compressed air is released from a reservoir, blowing the rivet swiftly to the other end of the hose. Meanwhile the quick expansion of air tends to cool the hose.

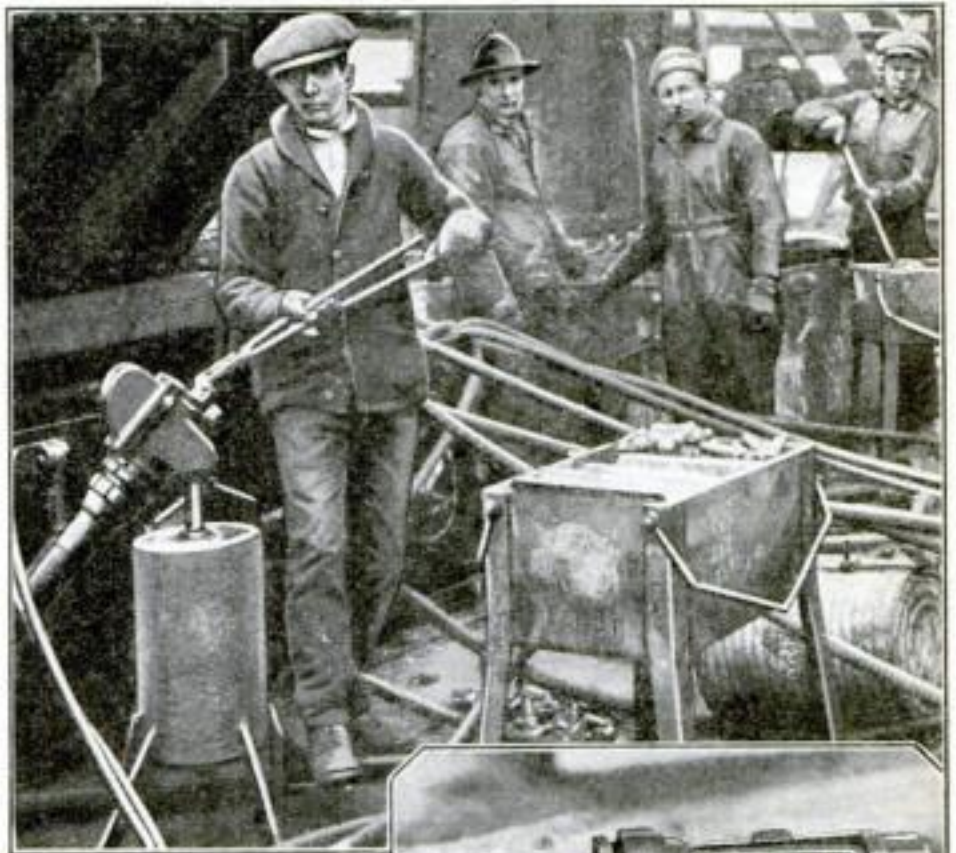


Above: Starting a rivet on its way through the metal tube. At right: The receiving terminal, showing how a cushioning disk receives the impact of the rivet

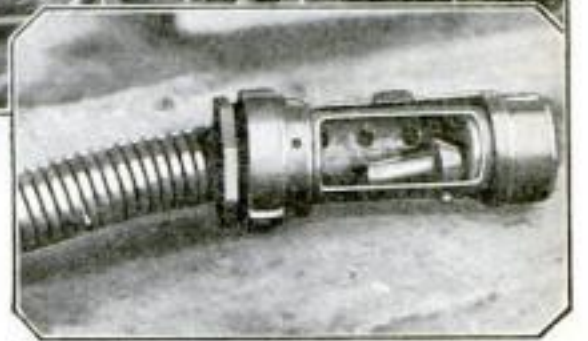

Reaching its destination, the rivet enters a receiving chamber, where a cushioning disk prevents it from being deformed by the sudden impact.

Besides assuring safety for structural workers, the pneumatic system eliminates the usual waste of misdirected rivets that are seldom picked up and used.

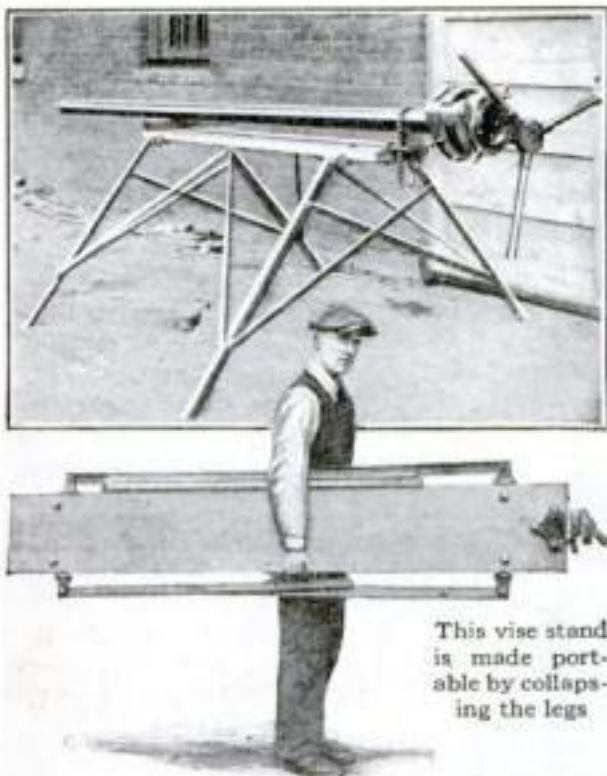

This vise stand is made portable by collapsing the legs


Portable Vise Stand Has Collapsible Legs

THIS portable vise stand, designed to save steps for plumbers and steam-fitters handling lighter sizes of pipe, consists of a stout plank firmly supported by braced collapsible metal legs. The wide spread of the legs affords steadiness while cutting or threading pipe. A hinged pipe vise is attached to the plank.

Four-Deck Stove Saves Heat

UTILIZING heat that usually is wasted up the chimney, a new type of stove permits gases formed in combustion to escape only after they have given up all their heat.

After passing beneath the primary cooking surface the heated gases are circulated through a series of metal boxes, the tops of which serve as successive cooking surfaces. From the third box the gases pass up the chimney.

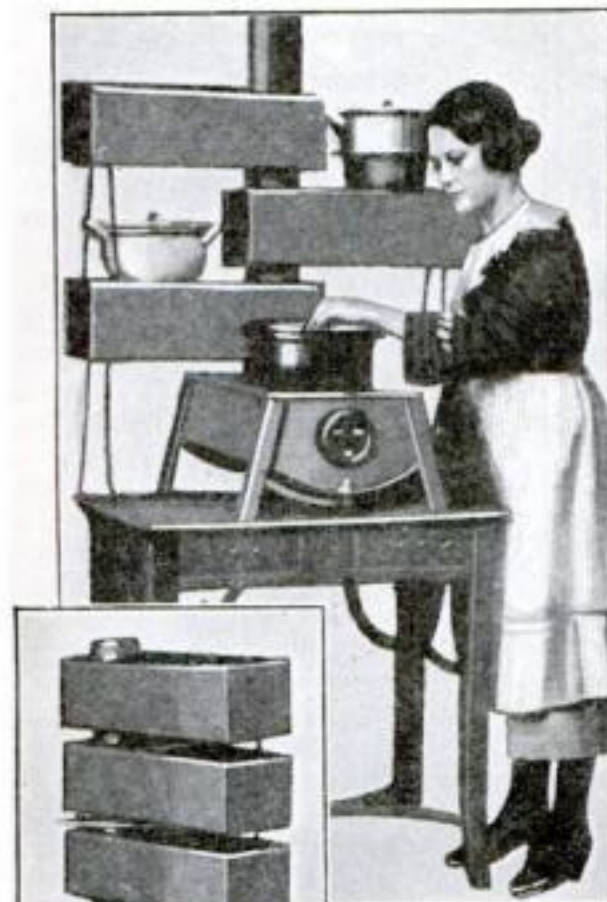

The new four-deck heating system applied to cook-stove (above) and heater (at the left)

CABLE CARRIES MAIL ACROSS STREAM


AN inventive farmer living in a rural district of California has insured prompt delivery of his mail, at the same time performing a kindness to the letter carrier, by constructing the novel mailbox carrier shown here.

To reach his home, mail must be conveyed across a river 300 feet wide, and in times of high water the nearest crossing is more than a mile away. Cable lines and an old-fashioned bicycle wheel converted into a pulley, solved the problem.


The mailbox is suspended from a carrier cable by means of two small wheels attached to the top of the box. The lower part of the box is attached to a second cable running over the bicycle wheel pulley. Thus, when the operator turns the pedals of the wheel, the box is carried across stream along the top cable.

After the mail carrier has deposited letters in the box, it is hauled back, coming to rest inside a heavy strip of tire iron bent over a post.

A fence prevents stray cattle from running into the cable lines.

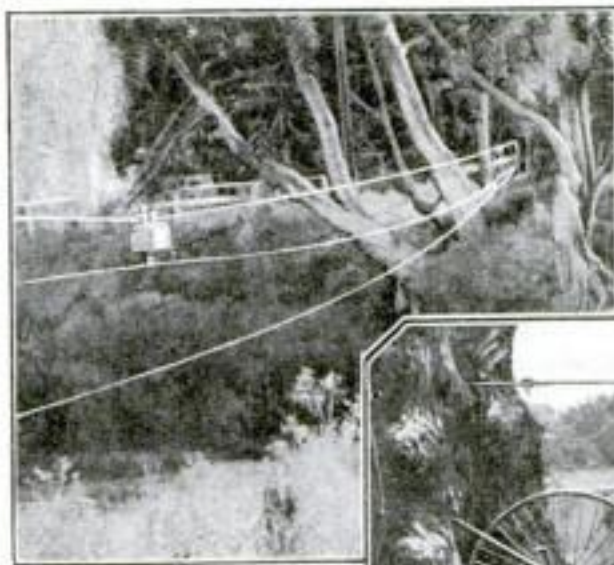

At the left is shown the mailbox being conveyed across stream on carrier and pulley cables. Below: The pulley, made from an old-fashioned bicycle wheel, and the mailbox carrier system

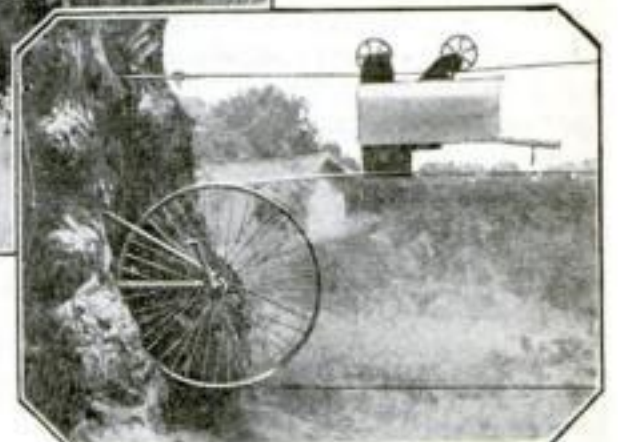

“WHAT My Hobby Has Done for Me,” is the title of an unusual article by Arthur Stringer, popular American novelist, to appear in next month's POPULAR SCIENCE MONTHLY. His hobby is—well, see the January number.

Nine to One Your Eyesight Is Pulling You Back

By Guy A. Henry

General Director, The Eyesight Conservation Council of America

IF YOU never have had to lay aside a book in the most interesting part of your evening's reading because your eyes would not "carry on," you are one of the fortunate few. Even so, the chances are at least nine to one that you have defective eyesight.

This statement may startle you. You may deny—probably indignantly—that you ever had any trouble with your eyes. You may say that they have always seemed adequate for your use. But, provided that you are more than 21 years of age, the chances are even greater than nine to one that some degree of trouble is there, whether you know of it or not.


For it is only up to the age of 21 that this proportion holds true. Beyond that age, the prevalence of eye defects increases, until at the age of 40 scarcely a man or woman has perfect eyesight.

But you needn't be unduly alarmed. Science knows all about your difficulties, even if you are unaware of them yourself, and has provided ready relief in the shape of proper glasses. You may not even need glasses. Probably a little rest for your eyes now and then and the correction of some of your habits in reading or working may rid you of small defects that, while not warranting the wearing of glasses, may be responsible for headaches and other disorders of a nervous character.

Eye Strain Is Wasteful

If your troubles are thus lightly corrected, you are to be congratulated. Statistics covering a long period of years, borne out by a recent investigation among more than 10,000 employees of industrial and commercial concerns, show indubitably that not less than 66 men and women out of every 100 you know are so crippled by defective vision as to cause an appreciable economic waste. There is no physical defect that contributes more directly to inefficiency and is more responsible for waste of vitality, effort, time, and material than bad eyesight.

Not long ago I met on the street a man whom I have known for years, an executive of a large insurance company. Usually good-natured and happy, that day he wore a black scowl and his greeting was anything but cordial.

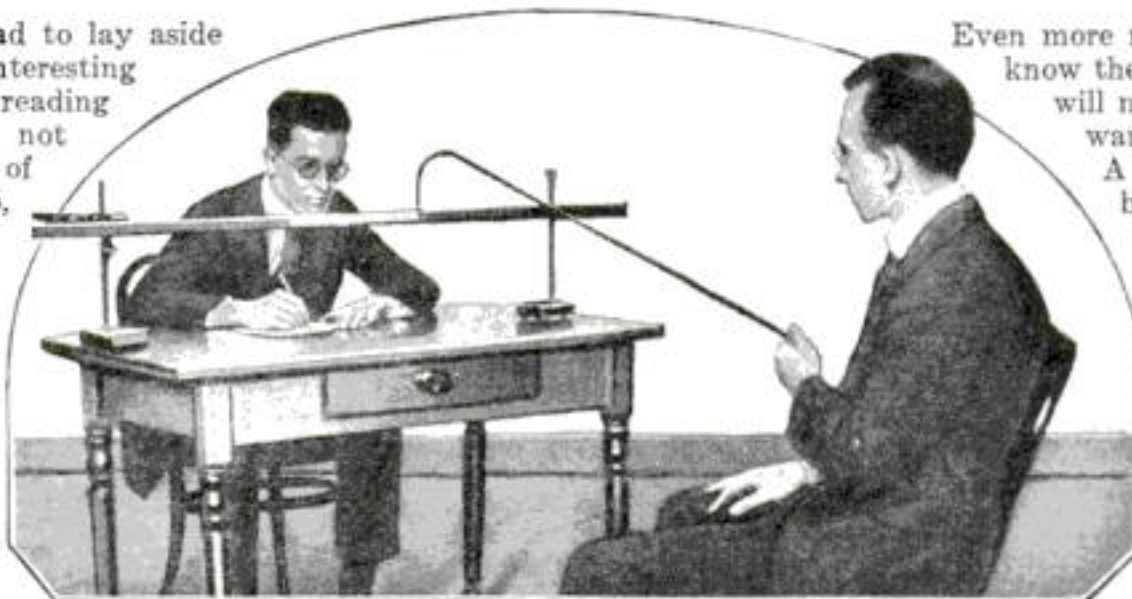

That eyesight influences the efficiency of the mind has been determined by this test with the Galton Bar, a device that measures ability to perceive small differences in length

While chatting with him I learned the reason for his ill humor. He had just had his eyes tested and had been informed that glasses would supply the only remedy for the headaches and fatigue that had been annoying him.

"Glasses!" he growled to me. "I don't need glasses any more than I need crutches! I'm not an old man—only 38. That eye man is an idiot!"

My friend's attitude is typical of that

Even more numerous than those who know they should wear glasses and will not are those who are unaware that they need glasses.

A person whose eyes have been defective since early life is likely to remain ignorant of the defect unless he is informed of it. Accustomed to seeing things blurred and indistinct, it never occurs to him that his visual pictures may be different from those of other people.

Recently a man of about 35 told me that the best years of his life had been wasted as a result of his failure,

through ignorance, to correct a defect in eyesight. As a schoolboy he had been "backward." Later he had shown little aptitude for work, drifting from job to job until the war came and he was drafted. An army examiner discovered that he was suffering from a severe case of astigmatism. Proper glasses were provided and he saw the world through different eyes.

As a result, since this man's discharge from the army he has become an expert machinist. He is making up the deficiencies in his education by studying at night, and is slated for advancement by his employers. All of this he might have accomplished years ago had any one discovered his handicap.

How to Save Your Eyes

DID you know that severe eye strain may cause you to use up fully half the vital force intended for all the organs of your body, draining the resources of your mind, your muscles and your nerves and producing severe fatigue?

To avoid misuse of the eyes, with its consequent ill health, medical science offers these suggestions:

Don't read or work in insufficient light. In well-illuminated places avoid the glare of lights shining directly into your eyes.

Don't read on street cars or buses.

Rest your eyes at the first sign of fatigue.

Be sure that your work is not at an uncomfortable angle with the line of eyesight.

Have your eyes examined by a competent practitioner for the correction of physical defects.

Don't refuse to wear glasses if you need them.

displayed by many persons in his position. They resent being told they need glasses. They feel they are being classified with the aged and the infirm. They fail to understand that glasses are the only means that science provides of correcting certain defects in the physical structure of the eye, from which many persons—between 25 and 60 per cent, according to the findings of school examiners—suffer either early in life or later.

Natural changes in the eye, occurring some time after 40 years of age, and usually necessitating the use of glasses for reading and other near work.

Eye strain, resulting from the extra work that we compel our eyes to do in an effort to contend with insufficient and flickering light, glare and too long periods of near use without intervals of rest.

These errors in many instances are serious, causing headache, eye ache, and various nervous disturbances. Moreover,

Common Eye Troubles

You may wonder why I lay stress on the use of glasses. I do so because they are the only sure means provided by science to aid the five common eye troubles that are due entirely to physical defects in the structure of the eyes. These are:

Far sight—caused by the eyeball being too short.

Near sight—caused by the eyeball being too long.

Astigmatism—caused by the transparent front of the eye curving more in one direction than in another.



Where Defective Vision Takes Its Toll

EXAMINATION of thousands of school children in the United States has revealed that between 25 and 60 per cent of the defective vision from which practically all of us suffer, comes during our schooldays, largely through faulty illumination.

In the workshop, with its artificial illumination, 66 men and women out of every 100 are handicapped in their work by defective vision. Bad eyesight is directly responsible for enormous waste of energy, time, and material.

Examine the two photographs below—one showing how a watch appears to normal eyes; the other, how it appears to defective eyes—and you will understand why many of us, accustomed from childhood to seeing things blurred and indistinct, go through life in ignorance of the faulty vision.



if the condition is permitted to endure for years, partial or total blindness may result from cataract, a disease that authorities agree frequently is the direct result of continued eye strain in the earlier years.

The abuse that the eyes of the average person receive has increased in the last couple of generations to a degree beyond estimation. Artificial illumination and the resulting pressure of modern commercial and industrial life are largely responsible for this increase. One naturally would suppose that modern improvements in artificial illumination would have made it somewhat easier for the eye to support its additional burden.

But such is not the case. The average eye has been unable to keep pace with the demands resulting from the extraordinary development in such illumination of the last 25 years. It has resented the additional work that has been placed upon it, and the result has been disorders, many of which people do not attribute to their eyes.

Conserve Your Eyes

We cannot, of course, reduce the speed and pressure of modern life even in deference to so important a thing as our eyesight. There remains, then, only one thing to do—make the best of modern conditions and learn how to use our eyes and not abuse and misuse them.

The first thing I should advise is periodic examination of the eyes by a competent refractionist—some one skilled in the science of measuring the human eye. Certainly you should have your eyes examined if you have never done so, for you may be contending unaware with eye strain, near sight, far sight, or astigmatism. But avoid those who offer treatment by mail.

When using artificial light, see to it that the illumination is sufficient. What apparently is too much light is

better than too little. Poor light will cause strain even to a normal eye, while there is little danger in over illumination, provided it is not accompanied by glare. The most common form of glare is that resulting from light shining directly into the eyes.


Glare is the greatest danger of artificial light, and may be minimized by shades and the use of proper glassware to modify and diffuse the light. Bare light should not be tolerated. The slightest sign of fatigue, such as drowsiness or smarting of the eyes, is a warning for you to rest your eyes.

That there is a definite connection between the eyes and the stomach is indicated by the fact that the nausea accompanying "car sickness" is attributable to the unnatural movements of the eyes caused by the vibrations of the car. In fact, general health and the eyes are closely associated. Defective eyes frequently are the cause of many disorders.

Science Offers Hope

Even though the eyes of most of us will not register "normal" in examination, our plight is by no means hopeless. The human body always has managed to adjust itself to changing conditions of life. The adjustment, though, requires time. We of this generation are forced to bear the burden of a sudden change in our mode of life, caused by the demands of modern life and the recent development in the science of artificial illumination. That our eyes have not yet contrived to adapt themselves to the new conditions is not remarkable. But they will—if given time.

If people will take care of their eyes, use them and not misuse them, and exercise judgment and reasonable precautions, it is quite safe to predict that, despite the strain and pressure of our modern life, our eyes will not grow worse, but grow better.

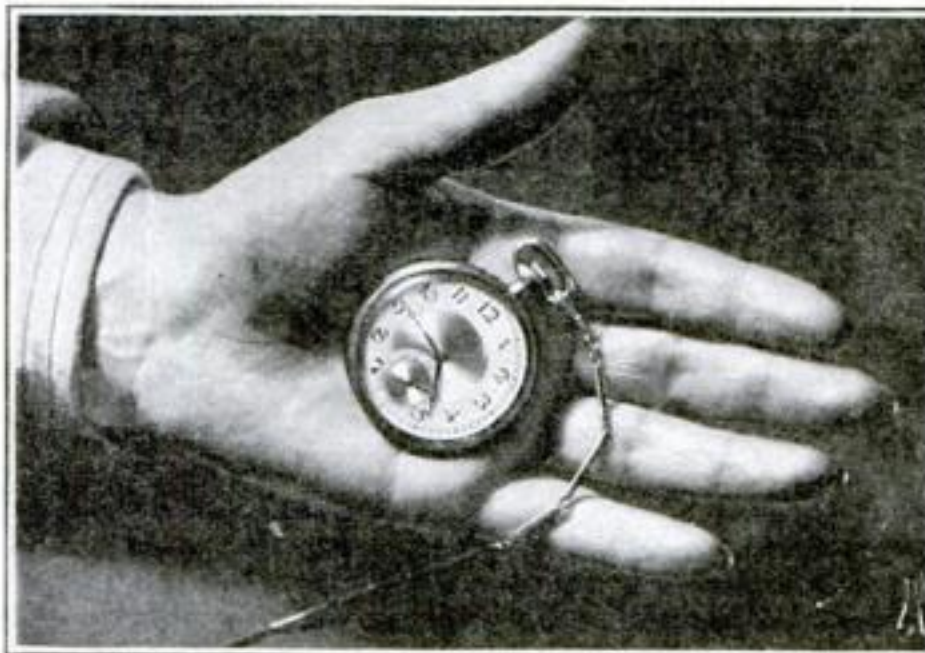

If one of these watches appears distinct, the other blurred, your eyesight is normal. If both appear blurred, your eyesight is defective



The new safety system for bank vaults. Accidental locking of the door automatically summons aid. A tank supplies oxygen until rescuers arrive.

If You Were Locked in a Bank Vault

WHAT if you were locked accidentally behind the thick walls of a steel bank vault? Can you imagine the horror of shouting vainly for help; the agony of the long night hours of waiting, with hope ebbing and the torture of slow, suffocating death creeping upon you?

The frequency, in recent months, of such tragedies with their untold mental and physical suffering, has led Alfred C. Bossom, a New York architect, to invent an automatic oxygen releasing device designed to save the victims of accidental imprisonment from suffocation. Mr. Bossom has supplied full specifications of his invention to American safety organizations, and the first complete apparatus now is being installed by an Ohio safe company in the new building of the Texas Bank and Trust Company, Galveston, Tex.

In the new safety system, dramatically pictured above by our artist, the locking of the vault door automatically switches on an electric

light within the vault. This light illuminates a card on which are printed instructions, at the same time revealing an oxygen tank close by. The accidental locking of the door also flashes an alarm signal, summoning police detectives.

Acting on the printed instructions, the

involuntary prisoner twists a stopcock on the oxygen tank, permitting the life-giving oxygen to escape into the vault at a pressure not exceeding 10 pounds. In very small vaults the prisoner puts on a mask connected with the tank; but in larger vaults the oxygen is allowed to escape directly into the room. A telephone permits the prisoner to communicate with his rescuers.

A small tank, it is claimed, will supply sufficient oxygen for the prisoner for at least 12 hours.

Many recent instances of imprisonment in bank vaults have escaped public notice, according to Mr. Bossom, only because they have not resulted fatally. In nearly every one of these accidents the victim, when released, has been in a state of collapse after a night of terror. In one recent case, a young clerk who was locked in a trust company vault at Paterson, N. J., had torn his finger nails and bruised his body by beating on the thick walls of his chilled steel prison.

HOW MANY OF THESE QUESTIONS CAN YOU ANSWER?

EVERY mail brings us scores of questions on mechanical and scientific subjects from POPULAR SCIENCE MONTHLY readers. While the questions touch on every phase of science, mechanics, and natural history, there are numerous duplications and from those, as indicating the widest general interest, have been selected the following twelve.


Our Information Editor has compiled thousands of answers to questions submitted by our readers. From these, other "monthly dozens" will be published every month in POPULAR SCIENCE MONTHLY.

How many of these questions can you answer correctly? To test yourself, answer each one of them to the best of your ability. Then turn to page 139 and read the correct answers.

See how near you can come to a perfect score. You'll find it an interesting game, and at the same time you'll be absorbing valuable knowledge.

1. Are there any creatures that live forever?
2. Can submarines receive radio messages?
3. Why does soap help to remove dirt?
4. What is the cause of earthquakes?
5. Are there special brain foods?
6. Why is Maine colder than France, although about equidistant from the equator?
7. Why can a bird stand on a charged trolley wire without getting a shock?
8. Are modern men less healthy than prehistoric men?
9. Where did the Red Indians come from?
10. Why does food continue to cook after it is placed in a fireless cooker?
11. What happens in your brain when you go to sleep?
12. How strong must an electric current be to cause death?

A "Flower Show" of the Deep Sea

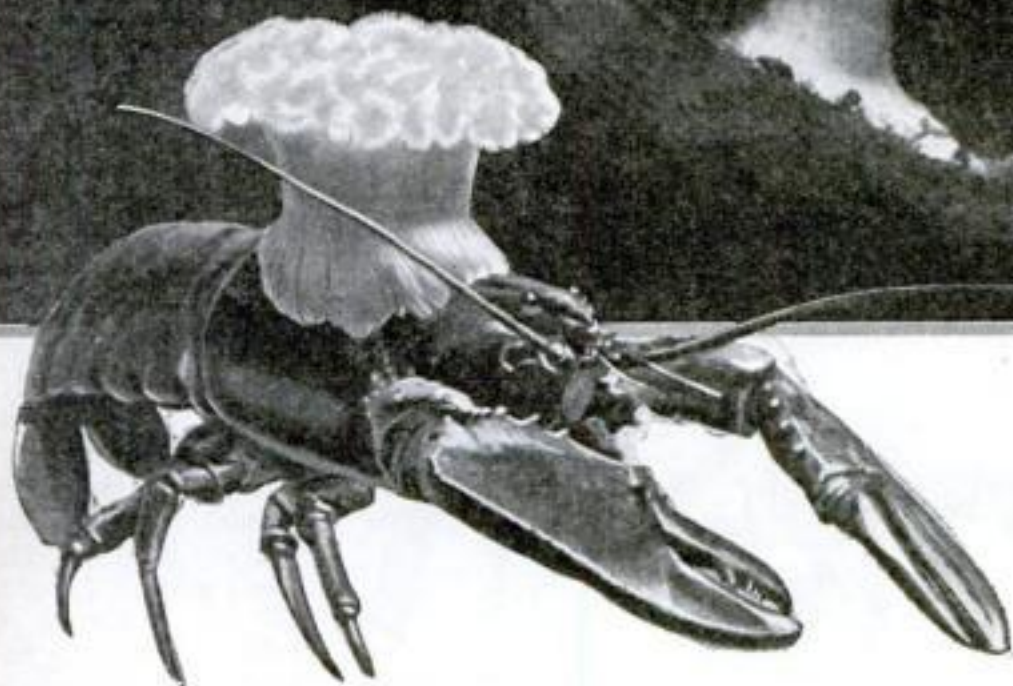

Here is a deep-sea taxi ride—a slow moving Sea-Anemone being transported on the back of the comparatively swift lobster

No more beautiful form of life is to be found than the Plumose Sea-Anemone, white, gray, or delicately pink. Scientists at the Heligoland station say that specimens of this species floating to the surface have attracted even the bees with their flowerlike appearance

The *Sagartia*, or Widowed Sea-Anemone (below), so called because it lives a solitary life, resembles some exotic tropical plant. Its beauty is a trap, for each of its delicate tentacles is a poisonous barb that seizes and stings to death any smaller creature within reach



This might be mistaken for a beet, or possibly an onion. Actually, though, it is a photograph of the Compass Jellyfish, with opalescent floating veils of unusual beauty and coloring

AT THE bottom of the sea the plants are animals. Strange though this may seem, science proves it to be literally true. Vegetation is to be found only near the surface of the ocean. The flower-like life of its vast depths, rivaling in beauty the choicest products of the greenhouses and cultivated gardens of the land, is animal life.

The remarkable pictures on this page were photographed by scientists of the biological station at Heligoland. Extraordinary patience and skill were required to get the subjects, in all their natural beauty, into shallow water where light could penetrate.



At the left are two Sea-Cucumbers, among the strangest of all strange ocean creatures. They are cousins to the Starfish, shown here paying them a friendly visit, and to the Sea-Urchin and the Sea-Apple. Chinese epicures frequently pay high prices for Sea-Cucumbers

Insect Actors in the Movies

Camera Shows Wonders of Microscopic World

By Louis H. Tolhurst

IMAGINE tossing a 120-ton locomotive up on your back and walking off with it!

You could do it if you had the strength, in proportion to your size, possessed by the ant. This has been demonstrated in my work with insects incidental to photographing them for the screen.

You have seen an ant crawling along the ground carrying a chip, breadcrumb, or some other burden that was a dozen times its own bulk, and probably you have wondered just how much that ant could lift in comparison with yourself. I was interested in this, so I made an experiment.

Coaxing an Ant

I spent the better part of three days recently trying to coax an ant to move a fragment of match stick that would correspond in size to a telegraph pole for us. The ant paid no attention to me and I was about to give up when it easily picked up the stick and carried it away. This convinced me that the insect could lift a much heavier burden, so I fashioned a tiny telegraph pole, tied it in the middle with a piece of grass, suspended the ant from a loop of string and after repeated trials succeeded in inducing it to take hold of the grass bridle.


The ant lifted the pole clear of the table with its mandibles—with its teeth! Considering the weight of the ant, that pole represented a burden of 240,000 pounds, or 120 tons, for you or me!

Consider a crew of workmen swarming over a building carrying a few bricks at a time, while puffing engines with derricks swing the heavy girders into place. Then consider ants of the stature of men, with their tremendous strength magnified in proportion to their increased size! The ants would have no need of derricks. They would handle steel girders as we handle toothpicks, each insect would be capable of carrying a carload of bricks up a ladder! Man's prowess would be insignificant in comparison.

Wonders of the Insect World

There is an old saying that the man who lives in the world of the telescope lives in a very small world, while he who lives in the world of the microscope lives in a mighty, majestic world.

Scientists who recently photographed the sun can attest to the first half of the saying and I am a firm believer in the latter half. For 10 years my work has

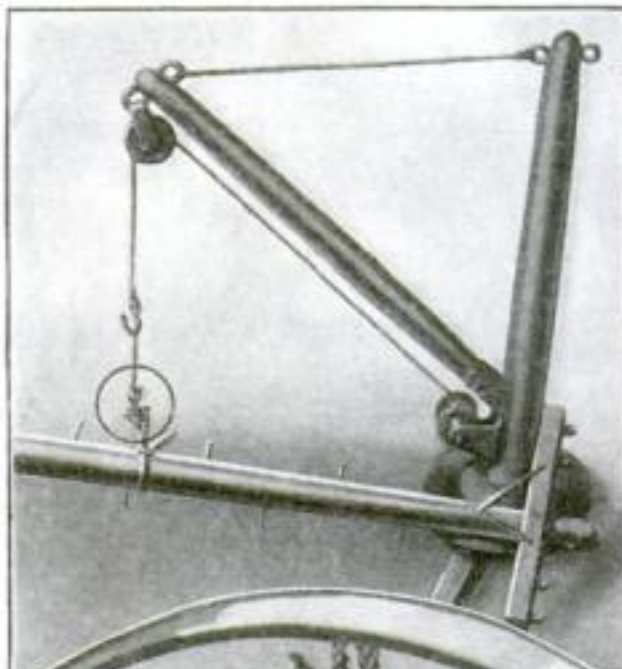

Photographing insect "actors." Here is Louis H. Tolhurst, of Los Angeles, Calif., at work with the apparatus he has invented to make microscopic movies of insect life

You have seen the house spider dangling at the end of his string, and probably you have observed how fast he can move with it. I have spent hours watching spiders build their webs. One day I destroyed a web and the spider quickly rebuilt it. I did this again and again and the spider demonstrated he could spin almost as fast as I could destroy.

His speed interested me so much I determined to find out just how fast he could work. In order to do this I rigged up a minute spinning wheel that could be turned as fast as the spider could produce his silk. Waiting until the spider emitted a tiny strand, I fastened it to the spinning wheel and started turning the crank. The faster I turned the faster the spider worked, until he reached the speed of 280 feet of silk a minute. And two skeins of linen thread, about 600 yards in all, was once considered a good day's work for a human operator at a spinning wheel!

Then I watched bees building their

All photos courtesy Principal Pictures Corp.

Highly magnified view of the dramatic insect movie photograph above, showing a common red ant lifting a miniature telephone pole with its mandibles. If a man had the same strength in proportion, he could lift a 240,000-pound locomotive

consisted almost entirely of observing and photographing insects, first in still pictures and recently on motion-picture film, and the better I become acquainted with my insect subjects, the more I marvel at their wonders and capabilities. The strength of the ant was a revelation to me, but that was only one of the wonderful things I learned about insects.

The spider, for example, demonstrated that as a spinner of silk he was much more proficient than man with his old-fashioned spinning wheel.



combs. Their work showed a perfection undreamed of by human efficiency experts. Each bee knew exactly what to do and did it without waste motion. Scientists will tell you that the bee, in building the cells in his comb, uses angles that employ to the best possible advantage the amount of wax he has to work with. No mathematician ever has been able to improve these angles. Who knows but what the bee understands mathematics that would baffle even Einstein?

The same holds for the common ant. Indeed, some scientists go so far as to place the ant next to man in intelligence. They point out the ant's ability to build homes, to keep farms, cattle, slaves, and cows to be milked; to make war in well organized battle formation; even to get drunk and dope itself with drugs.

Temperamental Insects

While there is some doubt about any such intellectuality on the part of insects, there is no doubt they have one characteristic in common with mankind. That is temperament.

Human stars of the screen are proverbially capricious. It is somewhat of a distinction, then, for me to be able to claim that I am producing pictures with a company of players that for whims, wilfulness, disinclination to work, and general ability to exasperate the director has no equal in the many studios of the great motion-picture industry.



You probably have seen spiders in the act of eating flies. I know I have. But when I wanted to film one in the act, I found myself up against it. I offered my spider fly after fly, but he would not eat.

Spider Film Star Is Coy

It took me nearly two weeks to coax him to eat. I believe he actually went hungry rather than do what I wanted him to do. And I spent nearly a week getting the spider to spin silk for me after I had built his spinning wheel. After the experiment was over, he built webs all over the studio.

As I said before, it took me three days to induce an ant to pick up a bit of matchwood, but when I threw such a stick into a hill of ants on which the camera was not focused, they fought to carry it off.

Of course, tiny creatures such as the members of my picture company cannot be set up and photographed as human actors or large

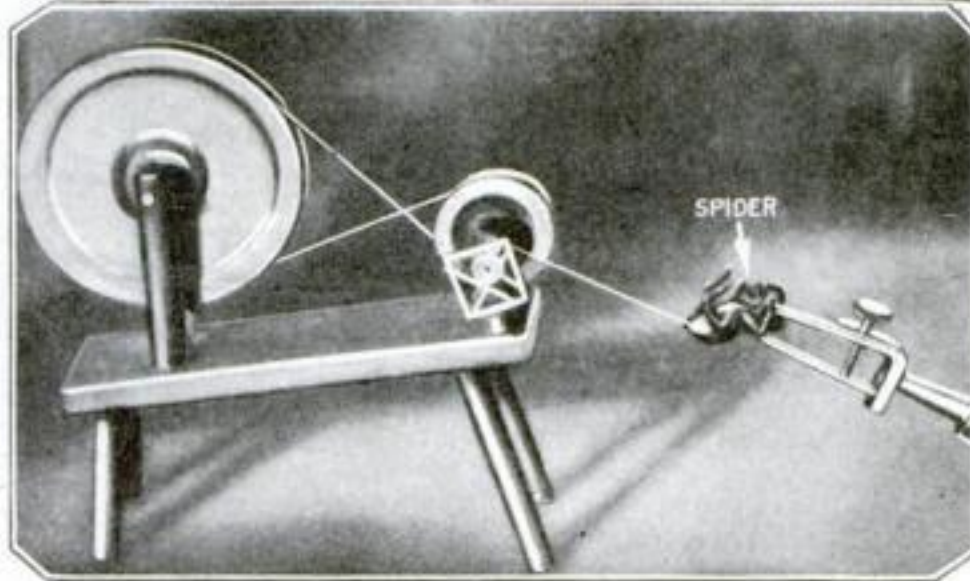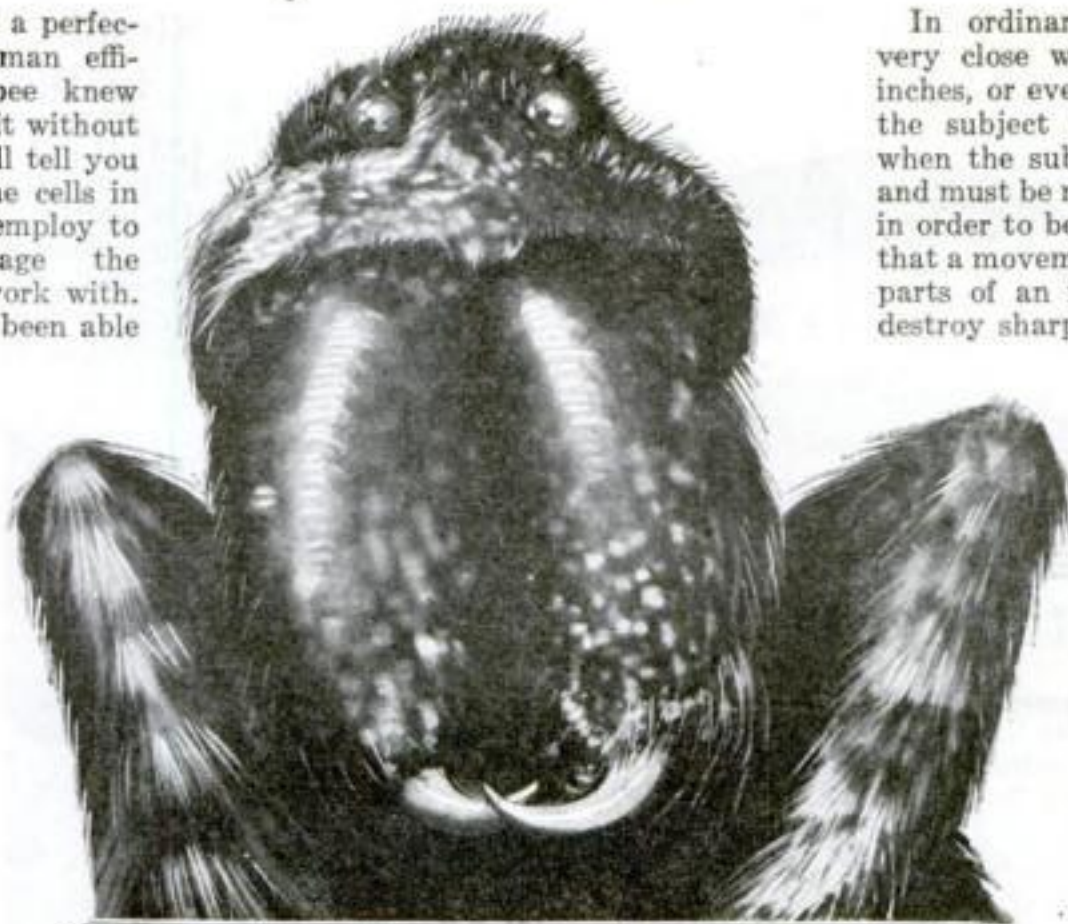

The ferocious looking house spider above demonstrated that as a spinner of silk it is more proficient than man. The lower photograph shows the spider feeding a tiny spinning wheel at the rate of 280 feet of silk a minute!

animals can be. Special apparatus is required for the work, and, since suitable apparatus was not available, I had to develop it myself.

Probably the only part of my equipment that would be at all familiar to any one versed in motion-picture production is my camera. That is an ordinary studio model, although it is mounted on a permanent platform and the film is turned by an electric motor, somewhat after the fashion of the cameras used for making film titles. The rest of the apparatus is especially designed for my needs.

THINK of an ant the size of a man and with the strength to lift 240,000 pounds and you have some comprehension of the fascinating interest which Mr. Tolhurst finds in his daily work.

Educated for the bar, this young California scientist has brought science to motion pictures and the wonders of insect life, hitherto to be observed only under microscopes, before the eyes of every one.

Read his story of the strange things seen in the world of the infinitely small. You wonder how man became the dominant creature in the world!

In ordinary photography—except in very close work—a variation of a few inches, or even a few feet, will not throw the subject badly out of focus. But when the subject is invisible to the eye and must be magnified thousands of times in order to be photographed, you can see that a movement measured in thousandth parts of an inch would be sufficient to destroy sharp focus. On this account it

was necessary for me to develop a lens capable of 100 variations of focus within the thickness of a human hair. This may seem almost incredible.

Consider, though, that in photographing the microscopic life in a drop of water confined between two glass plates, the distance between the two plates of glass is microscopically so great that the swimming organisms farthest away from the lens are actually out of focus!

Using Heatless Light

Correct lighting, too, furnished a problem, for light from ordinary sources sufficient to illuminate my "scenes" contains enough heat to kill my actors. So it was necessary for me to develop a virtually heatless light. I do not claim, of course, to be the only inventor of heatless light, but my method is the only one that I have found satisfactory for microscopic motion photography.

I cannot claim to have made any discoveries in entomology as a result of my motion-picture work.

But my camera has enabled me to bring to the eyes of every one the absorbing events of the kingdom of insects that heretofore scientists alone have been able to view.

Parasites in the Ant's Eye

I have made one-reel pictures of the bee, spider, and ant; but so far have scratched only the surface. In studying the ants I found that in some cases they have parasites on their eyes, tiny organisms living in their own tiny world. Such revelations make me wonder whether

there is any limit to the nicety of nature's work. First the tiny ant, then its smaller eye and then complicated little mites with eyes of their own living and dying in that eye! And who can say that science will not discover even smaller creatures living in the eyes of these parasites?

The lives of the insects are full of mystery, charm, and human appeal. No one will ever exhaust their interesting possibilities.



Plane Creates Gale to Test Glass

TESTING the resistance of plate glass by means of an artificial 125-mile gale created by the whirling propeller of a motionless airplane was the feat performed recently at the Curtiss Flying Field, Pine Valley, N. J. An SE-5 plane, equipped with a 220-horsepower motor, was used.

A sheet of plate glass five by six feet

and one quarter inch thick was placed directly behind the tail of the machine in such a way that the blast developed by the propeller would be directed against it with the least possible diffusion. The glass showed no trace of injury after the test. The velocity of the gale was measured by calculations involving motor revolutions, propeller pitch, and slippage.

A Disappearing Fan for the Home



The fan blades extended for use

AN ELECTRIC fan, the blades of which disappear into an electric-light chandelier when not in operation, is the invention of Clarence W. LeVelle of Wichita, Kans.

The fan is formed of curved blades pivotally attached to a rotating plate concealed behind the casing of the chandelier. From the casing lamps are suspended in artistic arrangement.

When not in use, the fan blades are swung back by spring controls into a concealed position.

Fingernails Grow 27 Yards

FROM a Swiss scientist comes an announcement that the average man of 50 has 27 yards of fingernails in his lifetime. He says that children's nails grow faster than those of adults; thumbnails faster than little fingernails.

Fire Pump Driven by Ford Engine

A SMALL, portable pump attachment for Ford cars, driven by the automobile engine, recently has been perfected for use in construction and road work, fire protection, and irrigation.

When the engine is running at a speed of 18 miles an hour, the pump is said to have a capacity of discharging from 200 to 250 gallons of water a minute at a pressure of 20 pounds. It will lift water by suction to a height of 26 feet. The first installation of the


pump and attachments requires about an hour and a half. Thereafter it may be connected or disconnected in two minutes.



An auto, with pump attachment, lifting a stream of water

Simple Spool Device Aids in Developing Photos


FACILITATING the work of the amateur or professional photographer, this simple film-developing device consists chiefly of two spools, mounted on spindles. Each spindle is attached to a vertical support, and the film to be developed is carried on the two spools.

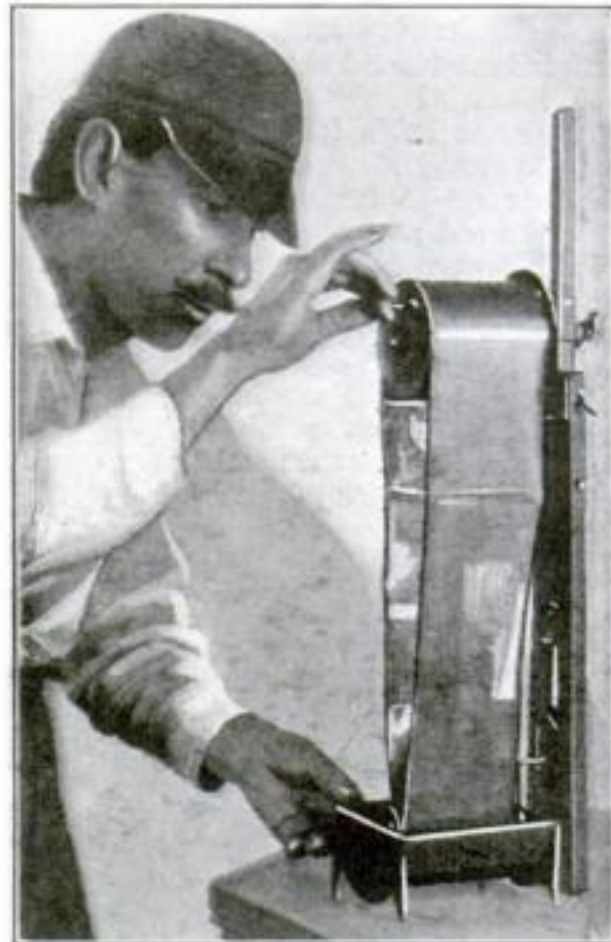

Developing a roll of films held on spools

The upper spindle has a handle so that the film may be revolved. The vertical support is vertically adjustable, so that a film strip of any length can be accommodated. A semi-cylindrical basin just under the bottom spool contains the developer or other solutions, so that the revolving film passes through it.

Thus the operator can stand in a practically erect position while handling film.

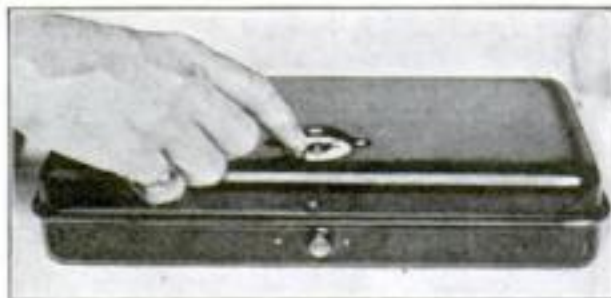

Family Strong Box Has Combination Lock

PRYING fingers cannot disturb valuable documents if they are locked in this fire- and burglar-proof safety box recently designed especially for family use by a manufacturer in Fulton, Ill.

The box has a special combination lock, with dial control.

New Gum for Varnishes

"CUAPINOLE" is a tree from which a new gum is taken in Mexico. It is reported to be of such quality that it may be used in making the finest varnishes.

Support with Basin Keeps Christmas Tree Fresh

THIS Christmas-tree support fits any tree, preserves it from withering, and restricts its tendency to shed needles. It will hold a tree weighing 250 pounds, it is claimed.



The four legs of the device, spreading enough to allow a container of water to stand between them, raise the tree several

inches from the floor. Thus, although the base of the tree extends into the water, it does not rest on the dish. This supply of water keeps the tree fresh.

A wingnut adjusts the holder to the size of the tree butt, and holds the tree securely. Screw holes in the legs permit fastening them to the tree.

When not in use, the holder folds into a small, compact shape.



The air-pressure rifle

High-Pressure Air Rifle for Marksmen

ANY marksman can practise with a new high-pressure air rifle recently put on the market. It has the full range and penetration of a high-powered firearm. The rifle is 22 caliber and will kill all sorts of small game at 100 feet.

A plunger rod with a button that protrudes from the end of the gun, works back and forth in the gun barrel. Air is compressed in a chamber by placing the muzzle of the gun on the floor, holding the plunger rod button firmly between the soles of one's shoes, lifting the gun until the rod is out full length, and then bearing directly down. The number of strokes pumped in the gun determines the force of the shot.

Inexpensive pellets are used as ammunition. There is nothing in the gun to wear out and the only care necessary is an occasional oiling.



E. S. Wilson, government chemist, with 38 samples of bootleg liquor under test

Peril in Bootleg Poison Revealed

TEN to one odds against the man who patronizes the bootlegger were revealed recently when 38 samples of illicitly sold liquor, bought in 15 cities, were analyzed by Government chemists at Washington, D. C.

Only two of the 38 proved to be whisky of pre-prohibition grade. One was purchased in Boston and one in Washington, D. C. Two were passable synthetic gin, from Cleveland and Los Angeles. The remaining 34 samples were poisonous.

Portable Welding Outfit Carried like Knapsack

AN OXYHYDROGEN burning and welding apparatus that can be carried on the back of a workman like a knapsack has been invented in Germany. Heretofore it has been necessary to use two heavy steel tanks and long hose to convey the gases to places difficult of access. Sometimes the hose has been cut in confined spaces with serious results to the workmen.

The new outfit consists of two small steel tanks, one containing liquid oxygen; the other, liquid hydrogen. Pressure of the gases is controlled by valves. A third control regulates the mixture of the two gases for the flame.




England Has Speedy Plane Carrier

THE first vessel in the world especially designed as a floating landing field and airplane carrier, the *Hermes*, was put through protracted and comprehensive tests by the British Admiralty. The carrier is capable of a speed of 25 knots.

In the body of the *Hermes*, are two hangars with room for 20 planes.


The funnel, observation tower, wireless apparatus, and operating quarters all are placed far up in the bow, allowing for a spacious flying deck extending more than three fourths the length of the vessel.

Planes are elevated from their hangars to the flying deck by electric lifts and cranes.

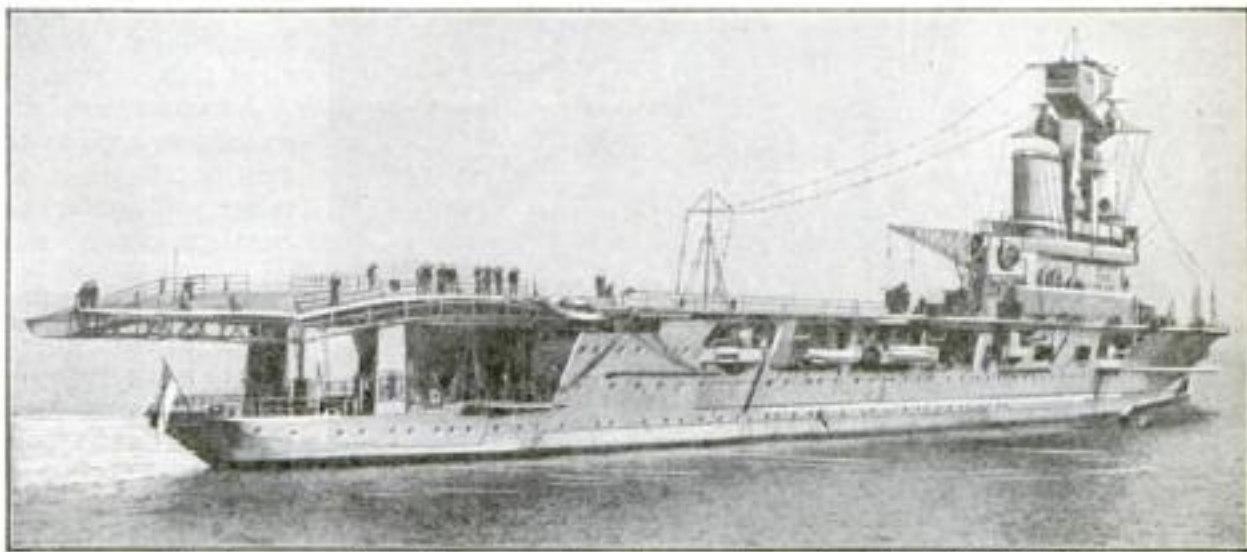

The new airplane carrier *Hermes*, showing spacious landing field behind funnel

Twin Typewriters Decode Messages

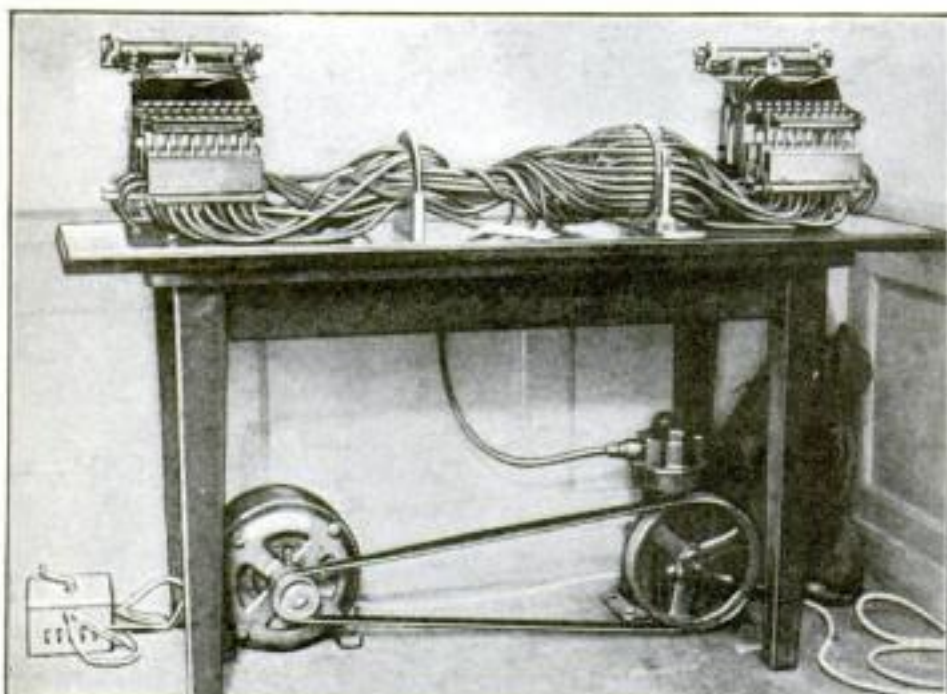

The remarkable typewriters are joined by a network of wires

BY A simple adjustment, a message typed on one of these typewriters can be made to appear on a sheet of paper in the opposite typewriter in any one of 280 codes.

Similarly, a message in any one of these 280 codes can, by the same sort of adjustment, be decoded on a sheet of paper in the other typewriter. The machines can be operated long distances apart.

This Shaving Brush Will Soap Itself

WORKING on the principle of the fountain pen, this remarkable new fountain shaving brush can be filled with an ever-ready supply of shaving cream. When not in use the brush is inclosed in a removable cover that protects the bristles.


The brush may be regulated so that any desired quantity of soap or cream is forced into the bristles when required. This is accomplished by an ingenious plunger arrangement. This feature eliminates waste of shaving cream.

The brush reservoir holds enough shaving cream for more than 70 shaves. When the brush has been charged with shaving cream, the bristles are dipped into water and the soap solution is then worked up on the face as with the ordinary brush.



Filling the fountain brush. The parts are shown in inset

New Tractor Wheels Protect Roads

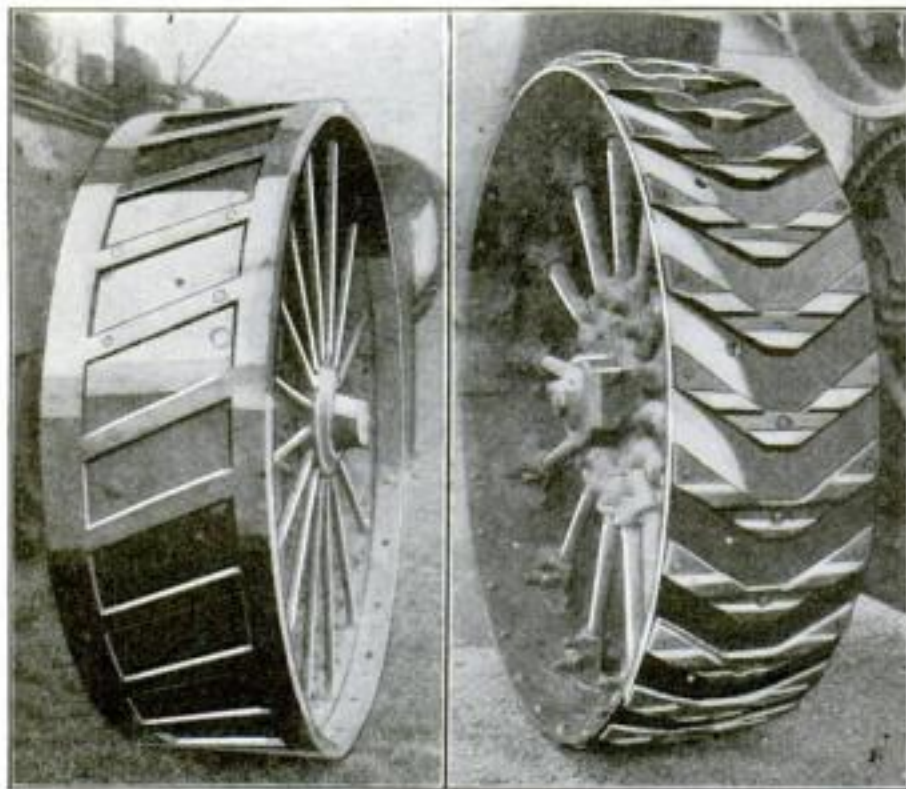

The new tractor wheel

Ordinary cleated wheel

A TRACTOR grip wheel, which is said not to injure roads, has been invented by Calvin and Nelson Davey, of South Vienna, Ohio, and was recently successfully demonstrated by them.

A narrow steel band exactly as high as the grip bands edges the inner and outer circumferences of each wheel. When the wheel operates in a field, these edging bands sink into the earth and permit the grip bands to come into use. On a hard road the edging bands keep the grip bands from making traction.



Twin Camera Takes Movies and Stills at Once


MOTION pictures and still pictures can be taken simultaneously, and focused by one finder with this Siamese-twin camera. Above is shown Frank S. Wilton, of Huntington Park, Calif., inventor of the camera, with which he photographed a large part of the film, "Hunting Big Game in Africa."

The motion picture part of the camera is fitted with four lenses, including a telephoto lens for taking close-ups of wild game.

Electric Machine Washes Glasses Automatically

AN AUTOMATIC washing and sterilizing machine for glassware, for use in restaurants, is electrically operated. Its capacity is 700 glasses an hour.

The glasses are conveyed by a circular motion to a cold-water spray to remove refuse, then to a hot alkali wash for cleansing, then to another cold spray to remove excess alkali, then to a sterilizing solution that destroys bacteria, and finally to an electrically heated hot-water rinse that assists the drying. The glasses require no handling once they are placed on the tray of the sterilizer.

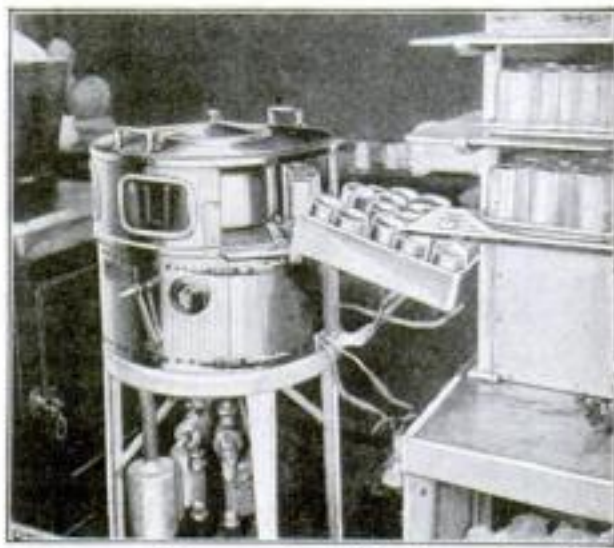

This machine washes 700 glasses hourly

Umbrellas Tested by Wind from Airplane Propeller

TO MAKE sure his umbrellas would not be turned inside out in any ordinary storm, an inventive umbrella manufacturer decided to subject them to airplane wind tests, which are the severest wind tests known.

An open umbrella, held before a seven-foot tunnel through which the wind was drawn by a 420-horsepower Liberty motor, withstood a wind strain of 34 miles an hour before collapsing.

As the umbrella was subjected to the full force of the air current, it was stated that in actual use it might stand an even greater wind. At the velocity of 34 miles an hour the operator had difficulty in holding it. The manufacturer claims to have been able to develop the strongest umbrella known.



Testing an umbrella in wind tube


"Murder-Tree" from Brazil

A VERITABLE "murder tree" called clusia—an ogre from the tropical forests of Brazil—is a new attraction at Kew Gardens, London, England. With aerial roots it strangles every tree near.


Birds deposit the clusia seeds on branches of neighboring trees. From the seed, roots grow toward earth, throwing out branches that envelop their victim.

Safety Bumper Has Canvas Stretchers

INJURY to a pedestrian struck by an auto equipped with this automatic safety bumper is practically impossible. Contact with the pliable front guard rail of the automobile causes two arms to spring out and draw the person struck on to two canvas stretchers, so designed as to prevent sharp contact with any part of the car.

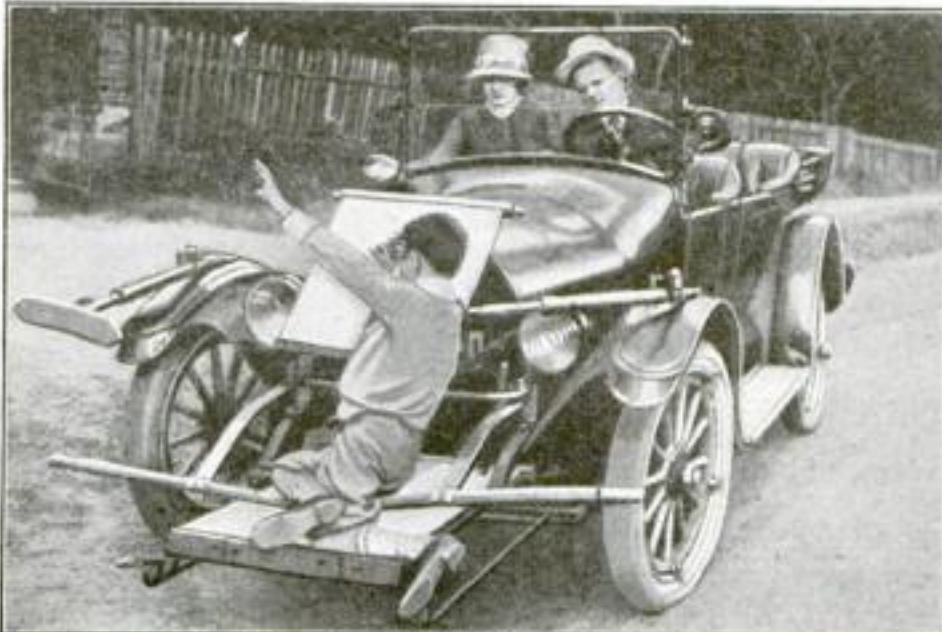

Bumper arms draw the pedestrian onto the canvas stretchers

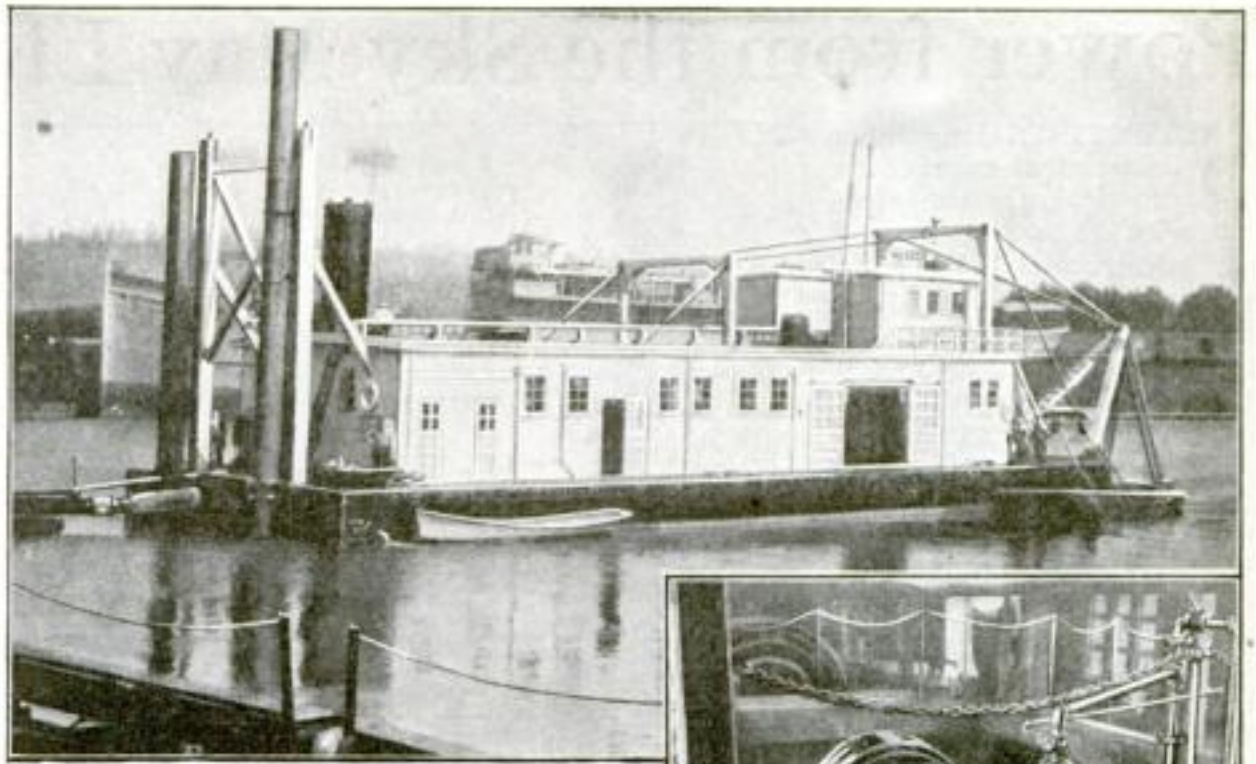


The river dredge and its Diesel engine

First Diesel-Electric Dredge Economizes Fuel

LESS than half the normal amount of fuel is said to be necessary for the operation of a new dredge at work in the Columbia River at Longview, Wash.—the first pipe-line dredge in the world to be operated by Diesel-electric power.


Fifteen barrels of fuel oil are required in 24 hours to operate the 525-horsepower Diesel engine, which in turn runs an electric generator to drive the electric machinery of the dredge. A steam-power dredge of approximately the same power and capacity requires 40 barrels of oil a day for her furnaces. At present prices this is said to represent a saving of more than \$50 a day.

The dredge was designed specially for shallow digging by James H. Polhemus, general manager and chief engineer of the port of Portland, Ore. It is capable of moving 225 yards of material through a 15-inch pipe-line in an hour. It is the smallest of a number of dredges engaged on a lumber mill and town site project, in which more than 12,000,000 yards of material will be moved. On such a huge project the saving that the Diesel-electric engine is said to effect will be considerable.

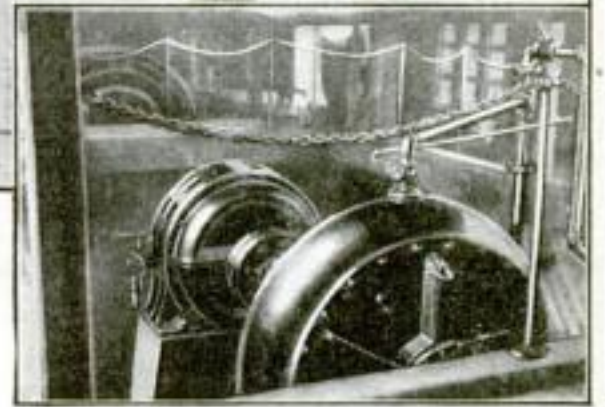

Portable Electric Hoist Saves Manual Labor

A PORTABLE and easily operated electric hoist, that permits one man to do the work of several, has been perfected by a Philadelphia concern for shops

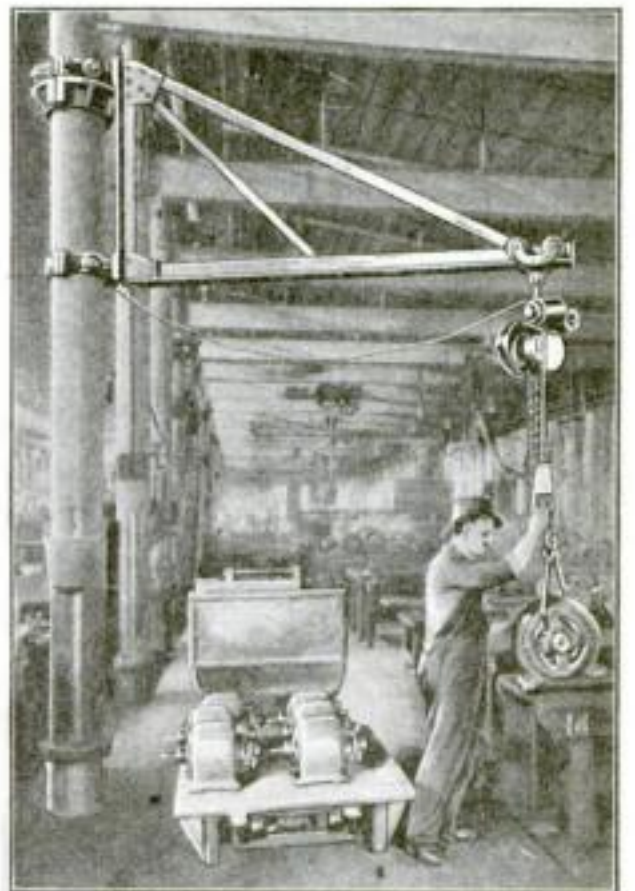

Hoist is controlled with one hand

and factories where bulky materials and machinery must be moved quickly and often.

The device consists of a standardized chain hoist of steel, electrified by a heavy-duty motor, which may be adapted also to standard chain hoists already in service. A hanging controller is operated by one hand, leaving the other hand free to guide the load.

Where current is not available, or if the power fails, the hoist may be operated by hand as an ordinary block.


Power from the Sky May Light Our Homes

SCIENTISTS long have dreamed of turning to practical use the electricity that now is consumed by destructive lightning bolts. M. Jules Guillot, a French inventor, has perfected a machine to utilize this latent power.

He bases his experiments on the theories of static electricity proved by such scientists as Franklin, Lord Kelvin, and others. According to these theories, static is produced by the motion of the earth around its axis through the non-conducting ether. This motion causes the earth itself to become charged negatively, while the air around it is charged both negatively and positively.

Since like charges repel each other and unlike charges attract each other, the atmosphere's negative charges are thrown away from the earth's surface while the atmosphere remains as a positively charged blanket.

The difference of potential between the positively charged air and the negatively

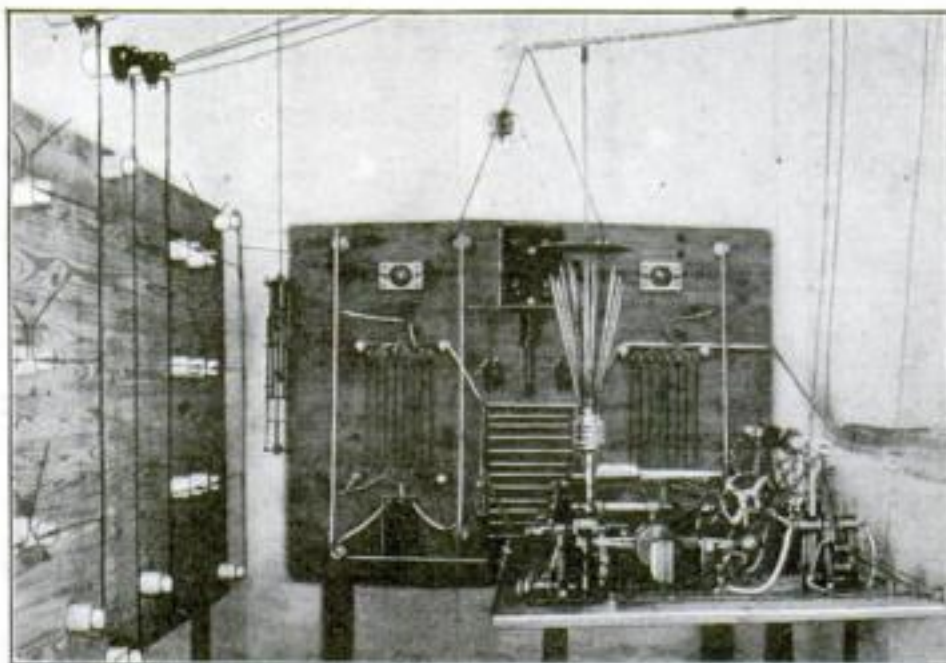

The complicated apparatus used by M. Jules Guillot at the summit of Mont Blanc, Switzerland, to draw power from the air

charged earth constitutes an unused source of electric energy. Since the amount of this difference depends on the distance from the earth of gas particles forming the atmosphere, Guillot has established his experiment station upon the summit of Mont Blanc in Switzerland.

At the station there are two antennae,

one extending toward the equator, the region of maximum density of the positive charges; the other consisting of a number of iron points extending vertically upward. The positive ions are attracted by the antennae pointing south and build up a charge upon a plate in the machine. A second plate is connected with the vertical antennae. Because of the difference of potential, this second plate absorbs a certain amount of negative ions that ordinarily would be repelled from the earth. Thus it is possible to establish a difference of potential or voltage within the machine that will cause a current to flow from one to the other when they are short circuited.

Instead of trying to use the voltage for this purpose directly, the charges are led off through step-down transformers.

It is claimed by the inventor that in this way he has been able to keep ten 50-watt lamps burning, utilizing only the static electricity of the air.


Measuring Flowing Quality of Oil

THE measurement of viscosity, or fluidity—that property of lubricating oils having to do with their resistance to flow—always has been a troublesome one to engineers. The most widely used instruments for measuring viscosity have been suited only to laboratory use and the involved computations necessitated have made them highly unsatisfactory.

Now, however, comes an extremely simple instrument that is said to determine fluidity far more accurately than

any device so far invented. It consists of a cup of steel or cast iron, provided with a hollow stem that forms a thermometer pocket extending into the metal of the cup. A steel ball fits into the cup. The concave surface of the cup has three minute projections that prevent the ball from making complete contact and also regulates the thickness of the film of fluid under test.

In taking a measurement of the fluidity of an oil, the steel ball is dropped into the oil and picked up by pressing the

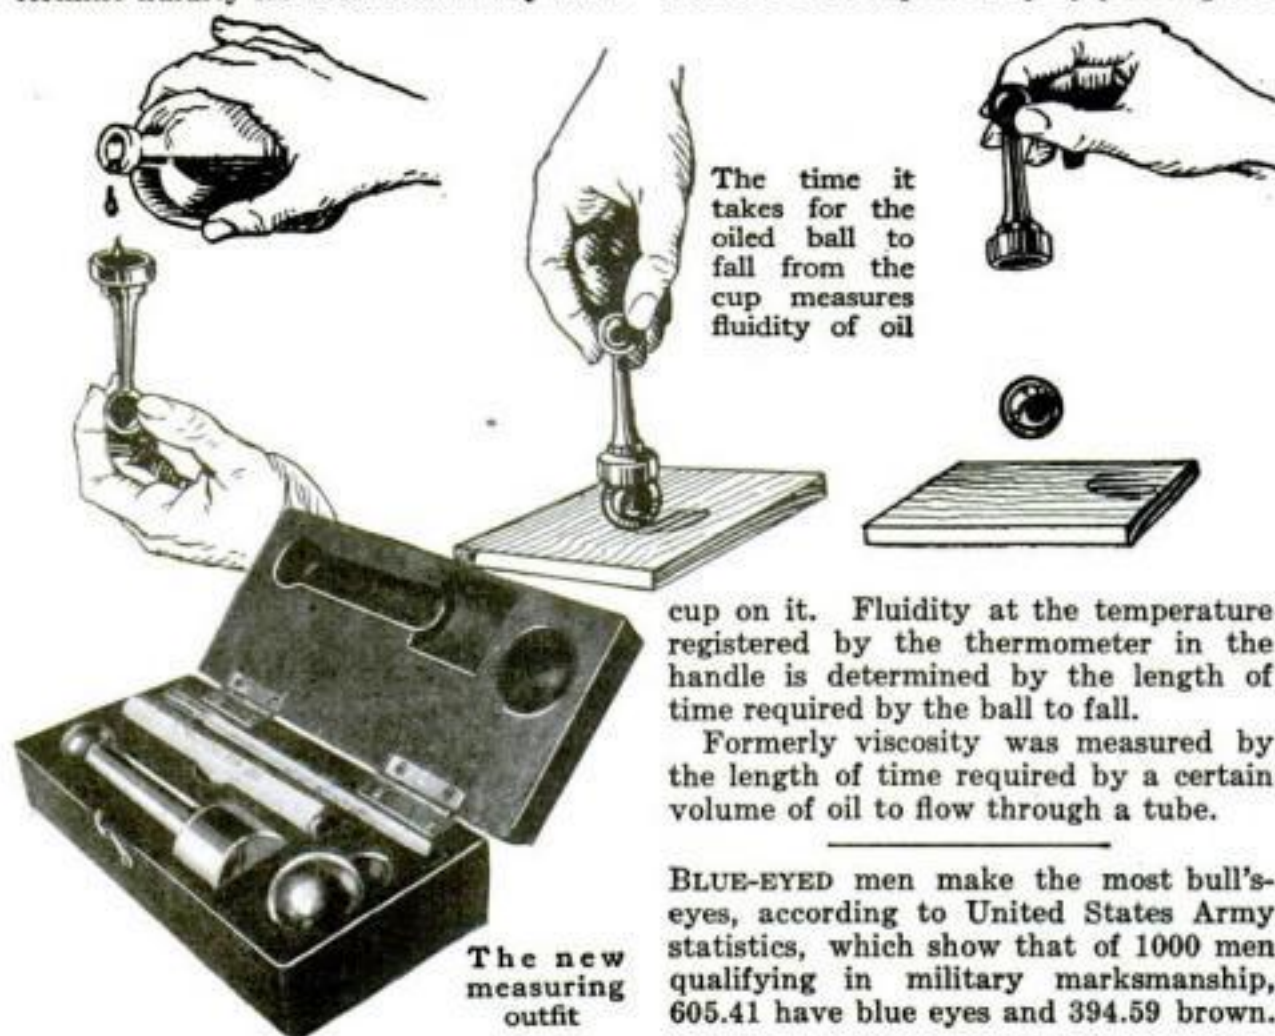

The time it takes for the oiled ball to fall from the cup measures fluidity of oil

cup on it. Fluidity at the temperature registered by the thermometer in the handle is determined by the length of time required by the ball to fall.

Formerly viscosity was measured by the length of time required by a certain volume of oil to flow through a tube.

BLUE-EYED men make the most bull's-eyes, according to United States Army statistics, which show that of 1000 men qualifying in military marksmanship, 605.41 have blue eyes and 394.59 brown.




He Studies Microscopic Life in Yellowstone Geysers

THE sort of life that may have swarmed in primordial seas is being studied in the hot springs and geysers of Yellowstone Park with an extraordinary combination of high-power microscope and motion-picture camera.

Most scientists believe that, when geologic time was young, the earth's crust and its waters were extremely warm. They believe that only special forms of life could exist in those ancient seas. The present studies, under the supervision of Dr. R. B. Harvey of the University of Minnesota, shown above, seek to determine whether the microscopic creatures in Yellowstone's hot waters are similar to those ancient creatures, and to learn, if possible, the biologic secret of their heat endurance.

Engine Crews Endangered by Gas in Tunnels

AN ARTICLE in the September issue of POPULAR SCIENCE MONTHLY called attention to the danger to public health in carbon monoxid gas from the exhaust pipes of automobiles. Now the Department of the Interior, after an extensive investigation, has reported another grave menace—the possible asphyxiation of locomotive crews by the same poisonous

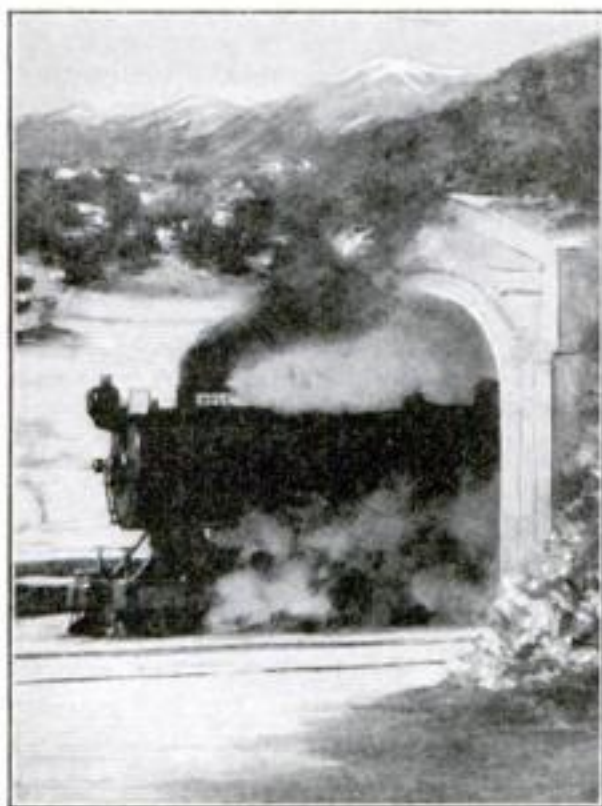


Poisonous carbon monoxid gas from engine stacks endanger the crews

gas from the engine stacks while passing through long tunnels.

The most satisfactory solution of the problem, according to experts, is to supply air to the engine crew through respirators attached to the air-brake pipe line of the train. These respirators consist of funnels connected with the pipe lines by rubber tubes and held by members of the engine crew near their faces. Valves controlled from the engine cab regulate the flow of air for normal breathing. The pipe lines supply pure air for 30 minutes.

Electrical Bath Cure

ELECTRIC baths are made possible by a novel electro-therapeutic apparatus developed by two physicians of Newark, N.J. The patient is placed within a magnetic field in a cabinet, where he may be sweated, baked, or bathed with electric light, according to the treatment his ailment requires. At no time is he in contact with a primary electric circuit, as only induced current is used.

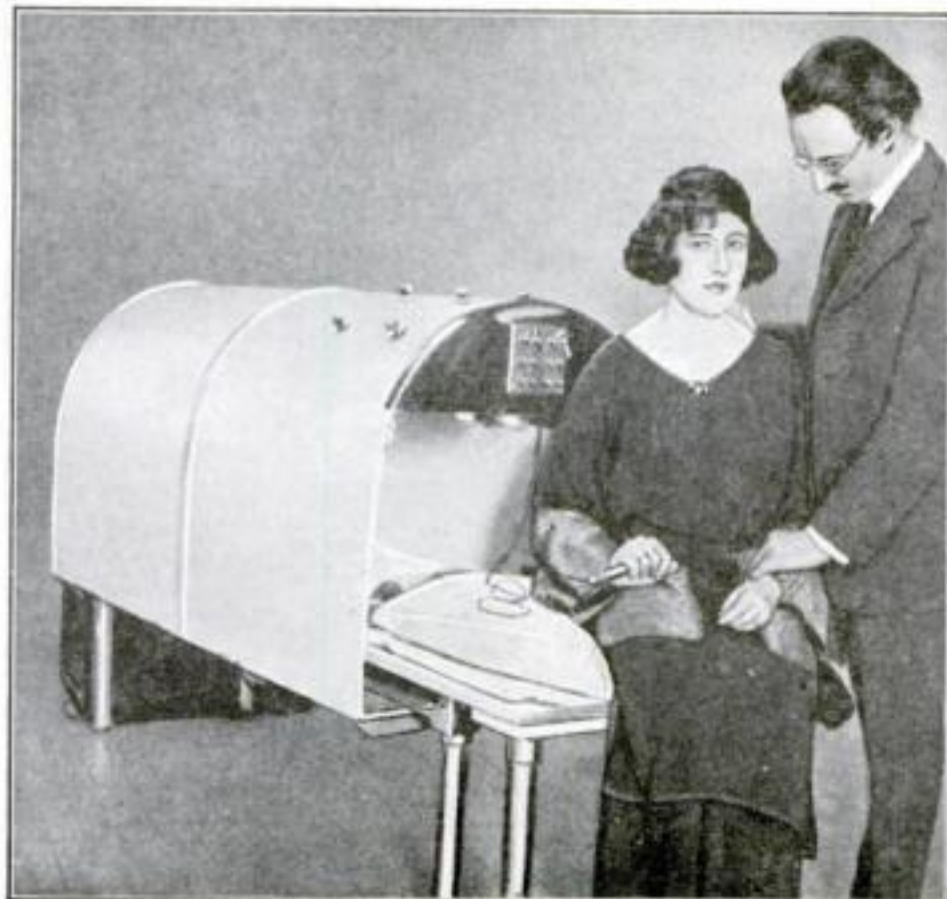

U. S. Has School for Hay Inspectors

A TRAINING school for Federal hay inspectors, the only institution of its sort in the world, has been opened in Auburn, N. Y., under the direction of the U. S. Department of Agriculture.

Completing their training, these in-


spectors are distributed throughout the hay producing sections of the country, to issue certificates upon hay that meets Federal standards. The men are shown above at work in the school grading hay according to the government standard.

Grass Fabric Made by Bacteria

WITH bacteria for assistants, Jonas Brolin, a textile engineer of Oakland, Calif., is said to have manufactured a fabric as fine as linen from China grass. The new cloth is said to cost far less than those for which it is a substitute.

The grass is soaked in tanks of water over which are spread bacteria that reproduce with astonishing rapidity. A cubic inch of water is said to contain 2,000,000,000 of them soon after they are introduced. The bacteria attack the gum and resin on the grass fiber.

When the gum has been separated from the fibers, the grass is removed from the tanks and dried. A machine next softens and subdivides the fibers, preparatory to the spinning and weaving. These final processes use regular cotton-manufacturing machinery.

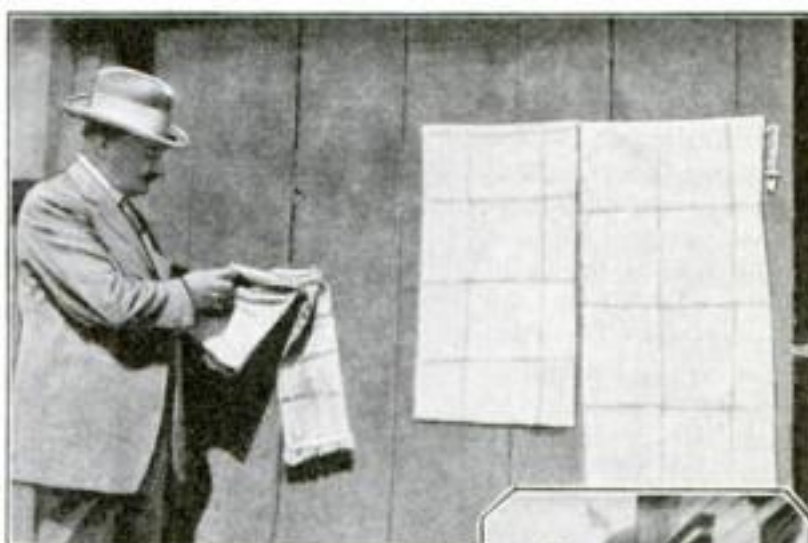

Above: Samples of the new "linen" fabric, prepared by bacteria. At the right: A bale of China grass from which the fabric is woven



Snowflakes as Patterns

LOOK at your necktie and see if it has an unusual design. Perhaps that design was suggested by a snowflake.

"Snowflakes are used by silk manufacturers extensively as patterns," says Wilson A. Bentley, speaking of his article for next month's POPULAR SCIENCE MONTHLY. "Jewelers fashion delicate designs from ideas they get from snowflakes. Even biscuit makers transfer Nature's handiwork to their cookies."

Mr. Bentley's is a remarkable story of a farmer whose fascinating hobby made him famous. It is full of the wonder and romance of science.

Evolution—A Universal Law

Concluding Article in "The Story of Man and His World"

By E. E. Free, Ph.D.

THE subject of evolution is like this round ball that we live on and call the earth—it is so vast that no man can see more than a little of it at once.

To any single human eye the earth seems nothing but a broad, flat plain more or less wrinkled with mountains and scratched here and there with lakes or rivers.

A Limited View

Similarly, it seems to many people that the theory of evolution means merely an idea of the bodily origin of man; that it is the story of how this wonderful body of ours has been developed in the course of millions of years out of simpler and more primitive kinds of creatures.

This really is, of course, one of the things that evolution means. It is the story of the evolution of man that we have been telling, in the main, in the previous chapters of this serial.

But this is only a very small part of what is included and implied in the idea of evolution. The whole theory of evolution is as much more than man as the whole earth is more than your dooryard. It is probably the grandest and most far reaching idea ever grasped by the human mind.

The idea of evolution may be defined, as I have explained in a previous chapter, as the idea of change. Things alter as time goes on and become new things. The unending panorama of growth and alteration is the universal law of life.

All Things Change Continually

Unliving as well as living things change. The earth changes. Mountains are worn down. Rivers alter their courses. The oceans advance and retreat. Ice sheets spread and disappear. The eternal hills are not eternal. The fixed stars are not fixed. Everything in the universe—man and man's ideas, the world he lives on, the sun that warms him, the stars that he looks up to and wonders at in the sky, even the chemical elements that make up the machine that man calls his body; each and every one is in continual change. "Permanent" things seem permanent to us only because we live so short a time. If a lifetime were a billion years, we should see the mountains melting before our eyes, the stars racing across the sky, the earth heaving and wrinkling under us.



HOW INVENTIONS EVOLVE

The first typewriter of 50 years ago would be unrecognizable today. The telephone, the dictation phonograph, the bookkeeping machine and other results of scientific evolution have transformed the modern office.

This is the greater theory of evolution, the theory that not man alone, nor living matter alone, but *everything* is changing, moving, producing something new. Everything everywhere evolves.

Let us take a familiar example—the evolution of inventions. Many people remember the first telephones; a few remember the first typewriters; nearly all of us remember the first automobiles or the first airplane, with the Wright Brothers riding out in front of it on a little board, like some one perched precariously on a window-sill. Compare these recollections with present-day realities. Inventions, machines, human devices of all kinds obey the universal law. Not even so simple and satisfactory a thing as the buttons on your coat remain the same for 10 years in succession. This is evolution.

Think of the history of transportation. The first men were their own wagons; when something had to be moved, they carried it themselves. Then some one learned how to catch wild oxen and make them into beasts of burden so that one man, using his brain to direct the muscles of his ox, could carry more weight and could

take it farther in a day. Soon some other genius invented a drag of poles to slide along behind the ox and still more weight became transportable. Finally, men learned how to make wheels and wagons that rested on them and how to catch horses that could move faster than oxen and go farther in a day. And today we have tamed gasoline to replace the horses on the highways and steam to transport things still longer distances over rails.

Life's Inventions

What is this but evolution? The ancient slime specks, you remember, at first were not able to move themselves about at all. Then presently they invented muscle fibers so that they could twist themselves through the water. Next they invented

a stiff rod down the back so that the muscles could twist them more violently and move them faster. They then began to swim like a fish. Gradually, invention by invention, they moved ashore and learned to creep and to walk. Some of them have even learned to fly.

How similar this is to the history of the human inventions that have given us our present means of transportation.

This universality of evolution is evident in every human activity. We can trace, for example, the history of the cultivation of the soil, step by step, from the most ancient way of stirring it with a forked stick down to the latest modern cultivators that pull a score of plows by gasoline.



RADIUM EVOLVES—How radium is prepared for many uses, including illumination of familiar radium watch figures (inset)

Courtesy U. S. Radium Co.


We can trace weapons of warfare in unbroken sequence from the hurled stone or swung club of the caveman to the poison gas and airplane bombs of modern destructive science. Even cookery is a traceable evolution from the ancient hot stone dropped into the stew with the bones. Fountain pens and fluid ink are direct descendants of the earth-smeared thumb of the prehistoric cave painter. We still have two buttons on the backs of evening coats because men used to wear a sword belt that had to be held up behind; an evolutionary vestige this, quite comparable with the fact that we still have an appendix inside the human body.

Ideas Are Subject to Change

Nor is invention the only place where evolution is evident. Ideas, too, are subject to evolutionary change. Think, for example, of what men believed from age to age about the place and support of the earth in space. In the beginning they thought it was a flat thing like a saucer floating in a universal sea of water. A few people, more curious or imaginative than the rest, asked themselves what the water was resting on and found no answer except the mythical ones of a great elephant or a broadbacked turtle or some gigantic strong man like Atlas. On some creature like this the whole universe that we know was supposed to rest.

But as time went on, these ideas changed. Men perceived that the earth was really a round ball, the center of the universe. The heavens revolved around it. Then ideas changed again. We believe now that the earth, far from being the center and focus of everything, is but a tiny speck revolving around a mighty sun which is itself a mere speck in the inconceivable vastness of space. And that the evolution of these ideas is still going on, that what we think about space and about the nature of the universe is about to change again, is evidenced by the theories of Professor Einstein with which the scientists are now so much concerned.

Other examples of the evolution of ideas are visible in those that we call social customs. Consider table manners, for example. The cave man merely grabbed what he wanted, dipping his hairy fingers in the pot or snatching bones out of the fire. Even so recently as three or four centuries ago most of our ancestors ate from a common dish, slicing off with daggers such morsels of meat as struck their fancy. Evolution has been much at work since then, and lest you

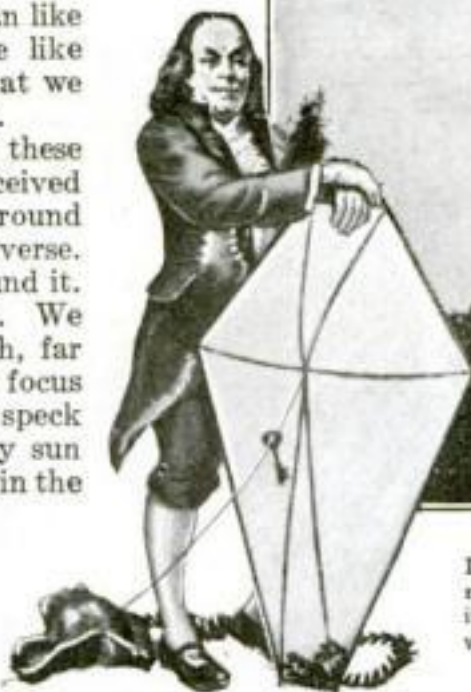

IF YOU COULD LIVE A MILLION YEARS you would see this mountain melt away under the rains and snows of the centuries. Not only the very earth itself, but our uses of its natural forces, are in evolution. Compare the modern wonders of electricity with Benjamin Franklin's kite that pulled electricity from the clouds, paving the way for a new age of scientific marvels

think these matters of social custom unimportant in world history, remember that few crimes are punished so unfailingly or promptly, either by business or by society, as crimes against custom, the crimes, for example, of guzzling coffee from a saucer or of eating with your knife.

It is not in the least an exaggeration to say that if one is unable to acquire such table manners as one's social surroundings demand, this may be an even larger factor in the prosperity of the individual and in the survival of his offspring than was a weak backbone to a creature in the stage of evolution between the worm and fish or an unsure eye to the monkey who was on the way toward an ape.

It is quite possible that the scientists of 10,000 or 20,000 years

from now, when they come to look back on the 10 centuries of the millennium in which we are now living, will hold its most important evolutionary event to have been the growth of those social ideas and customs that scientifically we describe as humanitarianism but which find their real and everyday expression in what we call politeness. *(Continued on page 140)*



THE EVOLUTION OF TRANSPORTATION is strikingly illustrated by this comparison of the ancient ox cart with the modern motor truck

Beginning Next Month

The Story of the Mind

*Most fascinating and useful
psychological series ever published
in a magazine*

By James J. Walsh, M.D.

*Famous American surgeon
and psychologist*

**Read his preface
on page 34 of this issue**


Seashell Makes Effective Loudspeaker Horn

DESIGNERS of radio apparatus, seeking a form of loudspeaker horn that would be small, ornamental, and at the same time produce a large volume of



sound, are said to have received valuable suggestions from the accidental use of a seashell as a horn by a radio enthusiast in Atlantic City, N. J.

Desiring a loudspeaker for his portable set, but finding the horn too bulky, he attached the shell to the loudspeaking telephone and was astonished by the result. Although the shell was only a few inches long, its peculiar shape gave it acoustic properties that caused it to produce as loud and perfect tones as had been obtained from a larger horn.

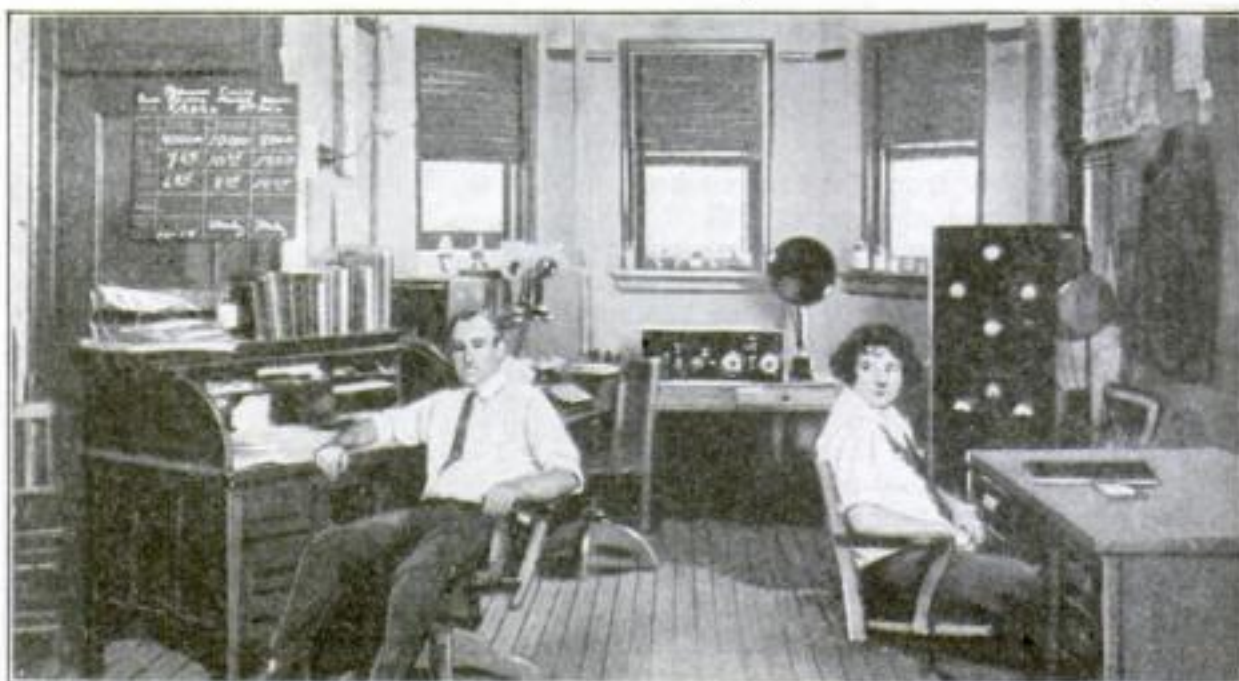


Interior of the farm bureau radio broadcasting station at Centerville, Ia.

Farmers Own Broadcasting Station

FINDING the mails and the telephone too slow in distributing daily market information, progressive farmers of Appanoose County, Ia., have established the first radio broadcasting station to be operated by a farm bureau organization in the United States. The station, located at Centerville, and known as XYZ, is

equipped with broadcasting and receiving sets of the latest type.

More than 100 farmers' receiving sets in the county listen each noon to market figures, news, descriptions of new farm methods and entertainment. C. W. Clarke, county agent, reports the innovation an unqualified success.

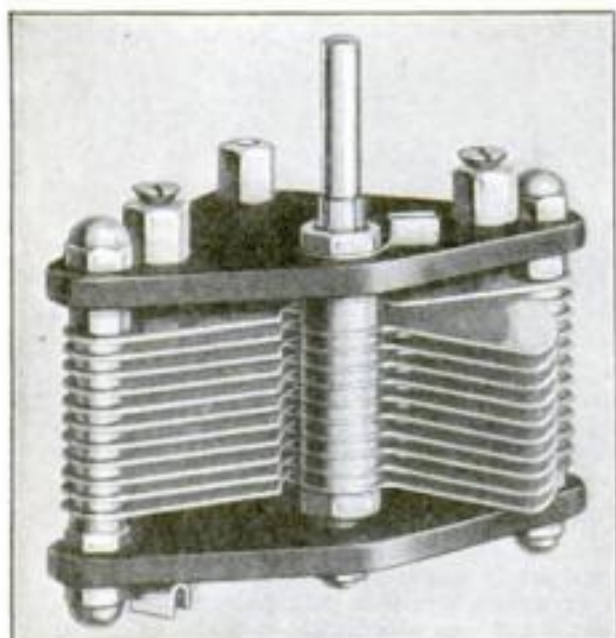

Remedies Inaccuracies of Variable Condenser

THE inaccuracy in the spacing of the plates common to many of the present forms of variable condensers has been remedied by one manufacturer by making the spacing collars of the condensers an integral part of the condenser plates. By this form of construction accurate assembly and rigidity are assured.

How to Avoid Grounding of Your Aerial


BEFORE you try your radio set, make sure that there is no chance of any part of your aerial being grounded by touching or swinging against any grounded object.

When no signals are received, the trouble may be due to the fact that the wire leading from the aerial to the set is touching the wire going from the set to the ground. To eliminate this trouble, use insulated wires for leads to and from the set.


Loop Aerial Folds into Neat Package

THE increasing popularity of portable radio sets for camp and touring use has brought forth many types of portable aerials. The most satisfactory of these is the loop aerial type that can be folded into a compact package.

Although this aerial is as efficient as any of the standard loops, it can be folded into a package slightly more than a foot long and having a total weight of only 2½ pounds. The supporting frame of the loop aerial collapses, the wires are looped together and all inserted in a cylinder.

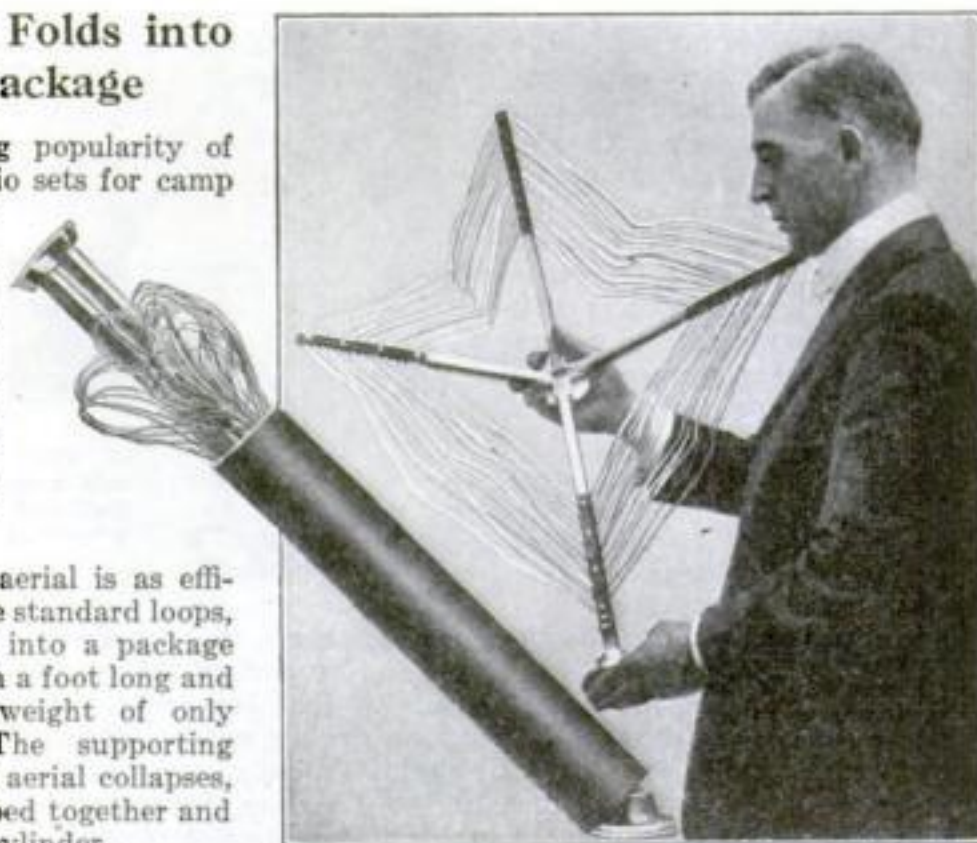

Truck Carries Radio Band in Parade

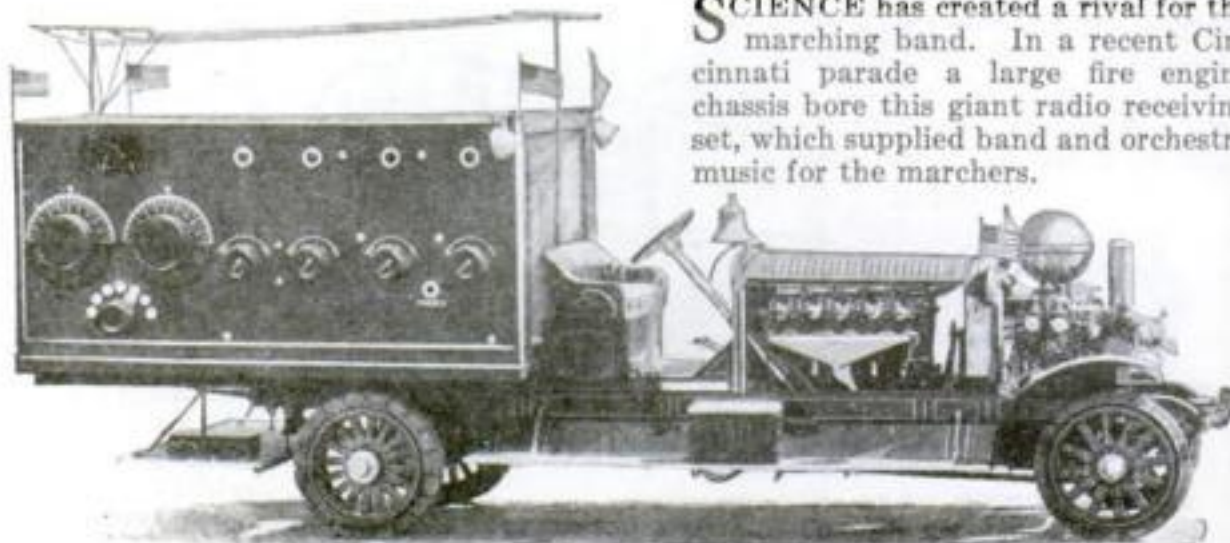

SCIENCE has created a rival for the marching band. In a recent Cincinnati parade a large fire engine chassis bore this giant radio receiving set, which supplied band and orchestra music for the marchers.

Tuning Coils—the Nerve Centers of Radio Reception

Various Forms of Inductance and Their Advantages

By Jack Binns

Radio Editor of
POPULAR SCIENCE MONTHLY

THE most important rule for the radio fan to learn in building his own set is that in the reception of broadcast wave lengths inductance is more important than capacity. Since inductance is obtained from coils of wire, and capacity from condensers, it follows that he will have to use as much of his coil and as little of his condenser as possible.

For that reason I am devoting this month's article to a consideration of various forms of inductances and their uses in radio circuits.

Many Coil Types

The different types of coil in use are almost too numerous to mention in detail. Among them undoubtedly are still many of the old-fashioned single and double slide tuners. These invariably consist of a coil of enameled wire wound upon a tube of very large diameter. As a rule a brass rod is fastened above this coil, and a brass slider so arranged that it will run along the rod from one end of the coil to the other, making contact with the coil wire along a strip where the insulation has been scraped away.

With such a coil simple vacuum tube circuits can be made without the use of a condenser, because in the inefficiently wound coil itself is considerable distributed capacity. The simplicity of this form of coil makes it an ideal one for the beginner. Its disadvantages include its excessive amount of distributed capacity and the general inefficiency of the winding and contacting.



The simplest form of circuit with such a tuner can be made by joining the aerial to the active end of the coil, and a ground wire to the slider. The vacuum tube will be joined to an A and B battery in the usual manner. A wire should be carried from the aerial side of the tuner to the grid condenser, and another wire from the positive side of the A battery to



ACCOMPANYING RADIO

Using her piano wires as an aerial, Miss Frances Mayer, of New York City, easily brings in broadcasted radio music which she accompanies on her piano. Careful tuning of her radio set and skill as a pianist are required for this unusual feat.

The wiring diagram in Fig. 1 (below) shows one of the most elementary forms of a conductively coupled double-circuit vacuum tube receiver, using a two-slide coil as a tuning element.

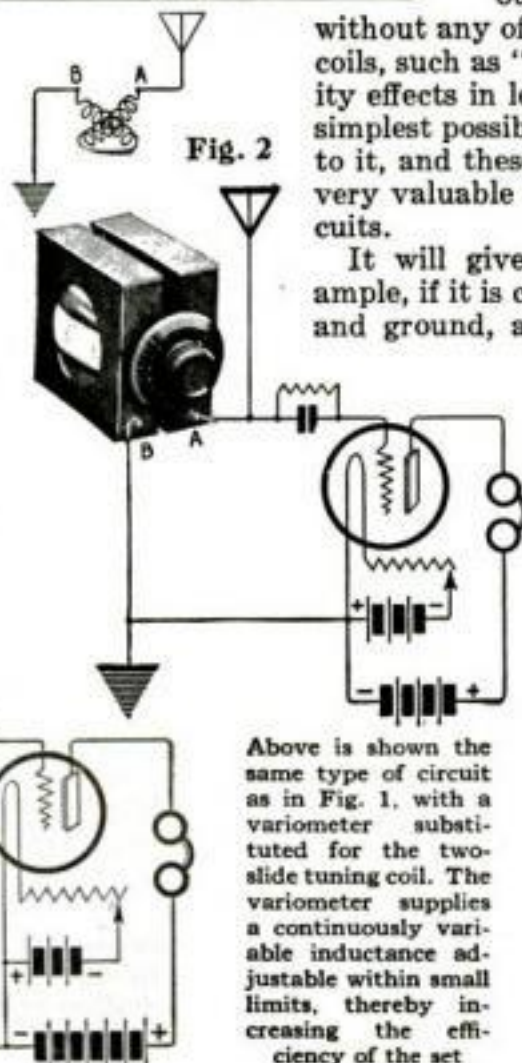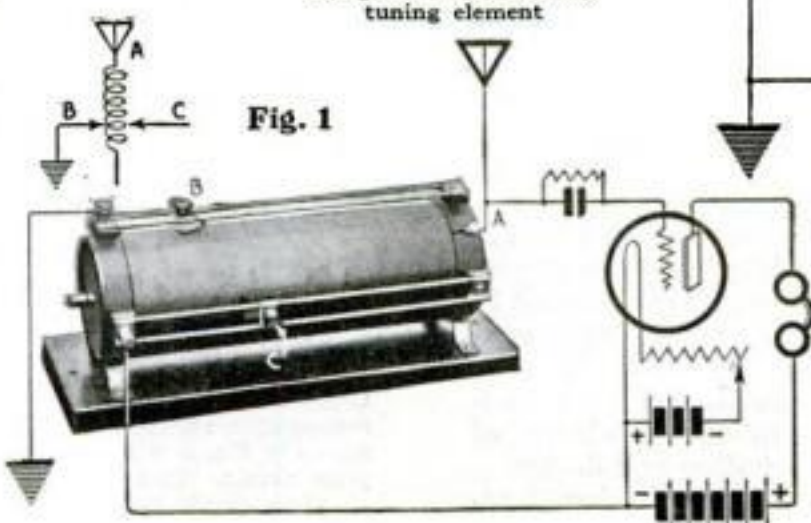

the ground terminal. Tuning then is accomplished by running the slider up and down the coil until the required number of turns are obtained.

A variation of this form of tuner is a similar coil with two sliders attached, as shown in Fig. 1. The addition of the second slider converts the coil into an auto transformer, making possible the construction of a double circuit. The connections in this case will be the same as above, with one exception. Instead of carrying the lead from the positive side of the A battery to the ground, it will go to the second slider. Such a coil allows slightly greater selectivity than the single slide tuner.

Slide or Switch

In these tuners the brass slide takes the place of the switch in the variocoupler. The object is to bring into action a definite number of turns of wire.

Probably the most efficient instrument ever devised for varying inductance is the variometer.

The advantage of the variometer lies in the fact that it affords a means of continuously varying inductance

without any of the losses that affect other coils, such as "dead-end" losses, or capacity effects in leads to switch points. The simplest possible connections can be made to it, and these can be extremely short, a very valuable factor in vacuum tube circuits.

It will give excellent results, for example, if it is connected between an aerial and ground, as shown in Fig. 2, with a vacuum tube connected with it in the manner I have described for the single slide tuning coil.

For fine tuning of inductance, the variometer cannot be surpassed. Its disadvantages are the difficulty of winding it and the limitations of inductance changing range. In constructing the instrument, shellac never should be used to bind the coils in place, nor should the wire be wound on heavy formers. A fairly efficient variometer can be made with two honeycomb or duolateral coils con-


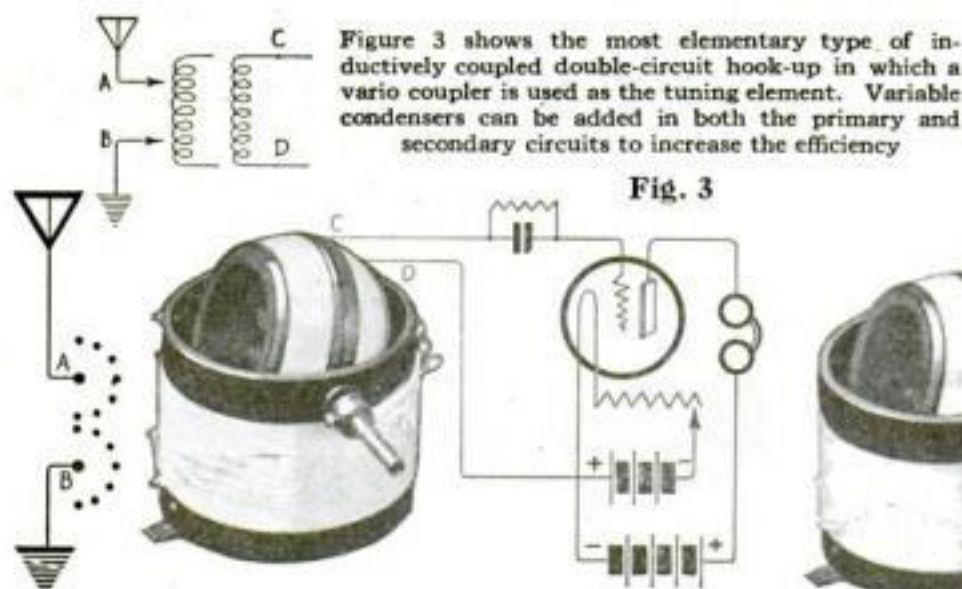


Figure 3 shows the most elementary type of inductively coupled double-circuit hook-up in which a vario coupler is used as the tuning element. Variable condensers can be added in both the primary and secondary circuits to increase the efficiency

Fig. 4

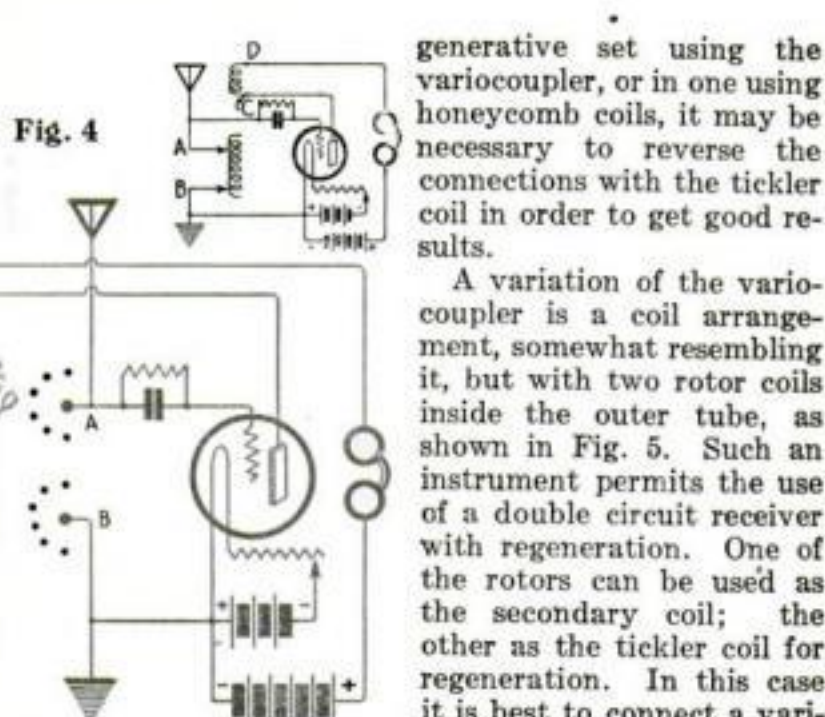

An elementary type of single-circuit regenerative receiver is shown in Fig. 4. The stator coil of the variocoupler is used as the coil common to both the primary and secondary circuits, while the rotor coil connected into the plate circuit is used as the tickler coil to provide regeneration

nected in series on a two-coil mount. Varying the coupling between two such coils will give a variometer effect.

As soon as the radio fan has mastered the single circuit, he will desire to proceed to a more selective receiver, which probably will be by means of a variocoupler. In simple double circuits, such as that shown in Fig. 3, where no condenser is used in the aerial circuit, it is imperative that two sets of switches be used, one for single turns, the other for groups of 10 turns.

With the variocoupler, much of the tuning is done by varying the coupling between the rotor and stator coils. It will be observed that in every case the inductance of the rotor coil is fixed so far as the number of turns of wire is concerned. In the case of the simple double circuit a variable condenser should be joined across the rotor coil in order to get the full amount of efficiency. In tuning, the smallest possible amount of the capacity of the condenser, consistent with good results, should be used.

Another Double Circuit Receiver

Another method of obtaining a double circuit receiver is by means of honeycomb or duolateral coils. In this case a two-coil mount is necessary, and two condensers are imperative. The condenser in the aerial circuit will be connected in series with the coil, while the condenser in the secondary circuit will be shunted across the coil.

The results to be obtained from regeneration are so advantageous that no fan will be content long to operate a straight non-regenerative receiver. In the case of regeneration, inductance is of extreme importance. There are two effective methods by which regeneration can be obtained; first by electromagnetic coupling, and second by electrostatic coupling. Electromagnetic coupling is the most efficient and the most practical. It consists of feed-back action obtained through some form of coupled coils. Electrostatic coupling is obtained from capacity feed-back. To a certain extent, it can be obtained by the simple process of joining a variable condenser across the grid and plate terminals of the vacuum tube.

The simplest form of efficient regenerative circuit yet developed employs a variocoupler, as in Fig. 4, in such manner

that the rotor coil acts as the feed-back agency. In this case the tube can be set into a state of oscillation by increasing the degree of coupling between the two coils, provided the rotor has sufficient inductance in its turns.

The outside (or stator) coil of the variocoupler is connected with the aerial and ground in the manner described for the circuit shown in Fig. 3. The grid circuit

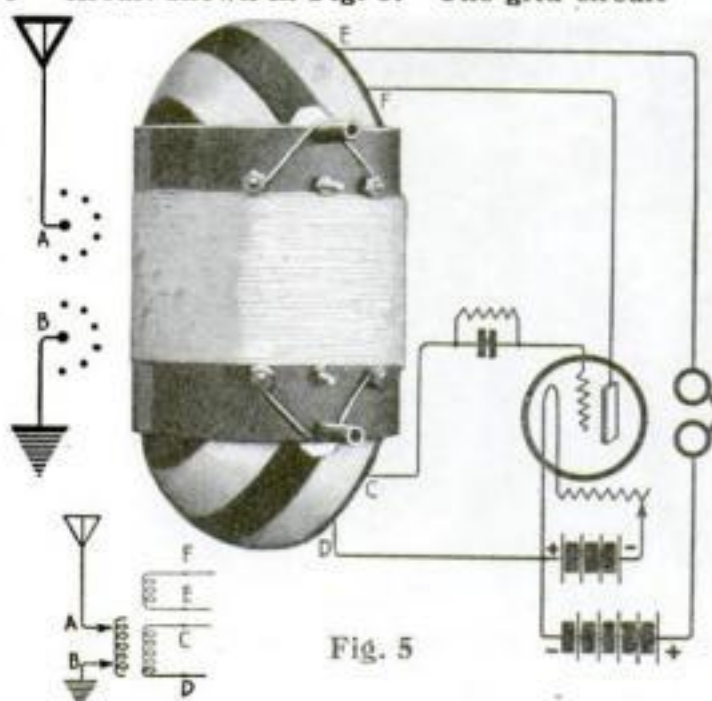


Fig. 5

Here the actions and qualities of the circuits shown in Figs. 3 and 4 above are combined. The stator and lower rotor coil produce the circuit shown in Fig. 3, while the regenerative action described in Fig. 4 is produced by the upper rotor

is connected with aerial and ground at both the switches, as in Fig. 4. The plate circuit runs from the plate of the tube through the rotor coil and the phones to the positive side of the B battery.

To many fans using honeycomb coils the idea of a regenerative receiver with only two such coils has not occurred. Yet such an arrangement is quite feasible. The advantage lies in the ease with which inductances are inserted in the circuit to meet any wave-length condition. Honeycomb coils have another great advantage, in the efficiency of their winding and design.

In the single-circuit re-

generative set using the variocoupler, or in one using honeycomb coils, it may be necessary to reverse the connections with the tickler coil in order to get good results.

A variation of the variocoupler is a coil arrangement, somewhat resembling it, but with two rotor coils inside the outer tube, as shown in Fig. 5. Such an instrument permits the use of a double circuit receiver with regeneration. One of the rotors can be used as the secondary coil; the other as the tickler coil for regeneration. In this case it is best to connect a variable condenser across the secondary coil. The condenser should be of as small a capacity as is practical.

Now we come to a method of obtaining regeneration that has found great favor with radio fans, and one that is very efficient on short wave reception—the so-called "tuned plate circuit." This circuit takes advantage of the internal capacity of the tube.

It has two main forms. One consists of a variocoupler with a condenser joined across its secondary, and a variometer in the plate circuit. The other has a variocoupler with a variometer in series with its secondary and another variometer in the plate circuit.

Three Tuned Circuits

In either form there are really three tuned circuits, each of which is placed in a condition of resonance with the incoming wave. The feed-back of energy between the plate and grid circuits is obtained from the capacity coupling existing between the grid and plate inside the tube.

IN NEXT month's article Jack Binns will tell of important new developments in the super-heterodyne receiver, popularly known as the "Rolls-Royce of radio."

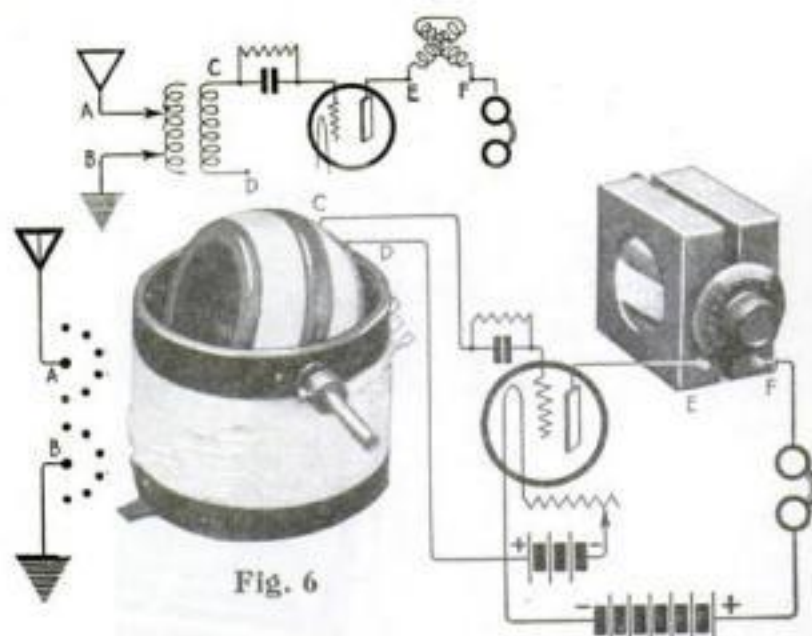


Fig. 6

Original form of the Armstrong tuned plate circuit type of regenerative receiver. The circuit is the same as that shown in Fig. 3, with the addition of a variometer in the plate circuit. This produces regeneration by tuning the plate circuit into resonance with the grid circuit

Odd Ways to Make a Living



Colored feathers are tied to a fishhook to imitate a living fly. Much skill is required to select and shape the feathers



LIFELIKE FLIES, with steel fish hooks for backbones, are created with astonishing skill by Mr. and Mrs. J. H. Hornfeldt, of Ridgewood, N. J. They are shown above in their workshop, fashioning feathers to supply expert anglers with the indispensable lures



AN ARTIST IN GLASS is Herman Miller, who makes lifelike glass models of strange undersea animals for the American Museum of Natural History in New York. He is shown above inserting minute glass feelers in rotifers. By these feelers or suckers, the strange, leechlike creatures attach themselves to marine plants

CROWS AND BLACKBIRDS ARE DOOMED at the Experimental Farm of the U. S. Department of Agriculture, Arlington, Va. There the oldtime scarecrow has been supplanted by "Dad" Garrett, who in spite of his 80 summers, is a crack shot. "Dad" is shown at the left preparing to bring down one of the winged pests with his gun



PAINTING TINY INSECTS, Miss Eleanor T. Armstrong carries on a strange profession in the National Museum at Washington, D. C. Her subjects "sit" for her under the microscope


Better Methods for the Housewife




This convenient lifter for taking eggs and vegetables from boiling water is in the form of pincers with hoop-shaped jaws that slip over the surface of the object to be grasped



Among the latest electrical appliances for the boudoir is a small motor-driven machine to which can be attached various implements either for manicuring or hair drying. For hair drying the device is mounted on an adjustable stand and a fan is attached to the shaft

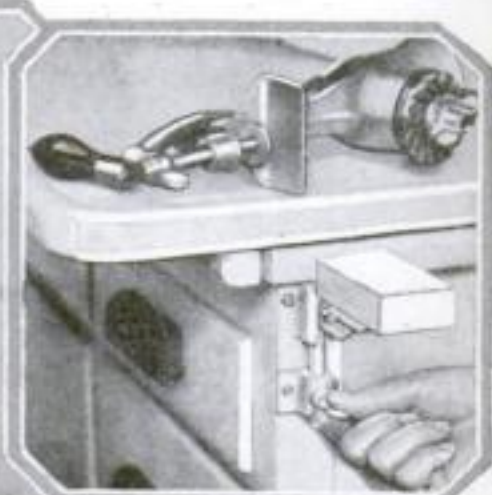

Stationary brackets for food choppers that catch in aprons can be replaced by this folding bracket that will fit any kitchen table. By unscrewing a thumbnut, the device can be folded away

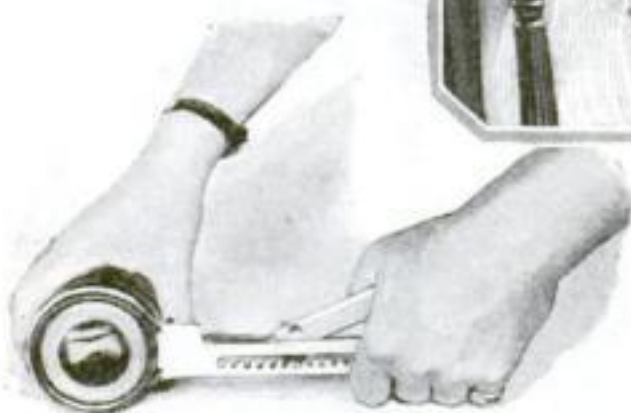


This appliance removes or tightens screw tops on jars or bottles. Tightening the wire cable around the top by pressing the lever removes the cap. Turning the device in the opposite direction tightens it



When opened, this combination ironing board and clothes chest offers two boards, one large and one small; a tilted rack to hold dampened clothes, and two shelves to receive the clothes after they are ironed



Pressing a button starts an electric motor that spurts water over the dishes from a revolving metal cone

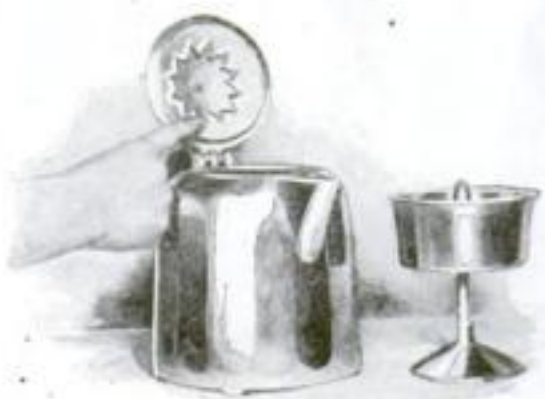

An unbreakable metal top for percolators is said to improve the coffee

The lid of this kettle locks into bracketed holders on the rim. The lid is held in place tightly while the kettle is tipped to drain water from its contents



This unique four-story cooker utilizes heat usually wasted. Each of the four pots heats the next above

Coal or Oil Fuel—Which?

A Few Pointers about the Heating Problem in Your Home

A FIFTY-CENT broom will sweep a room just as clean as will a \$50 vacuum cleaner, yet housewives are using brooms less and less. The reason is obvious. A vacuum cleaner stirs up less dust; it does the work in vastly less time; it is operated easily and it leaves no pile of sweepings to be gathered up.

The comparison between domestic coal furnaces and modern oil burners is very similar. Where oil fuel is used, no clouds of dust come up from the cellar to injure health; a supply of heat is obtained easily and maintained evenly with little trouble, and the disagreeable job of cleaning out the ashes is eliminated.

Oil as Fuel

The question often asked is, "Can I use oil satisfactorily as a fuel in my home?" You certainly can if the proper equipment is installed carefully. On the market today are many oil burners that will work equally well in a five-room home or a 25-room dwelling. On the other hand, there are burners that will not work at all successfully.

Burners that have been found to work satisfactorily appear at first to be very complex. Such parts as fans, motors, and thermostats give one the idea that they are difficult to operate. This impression is erroneous. The average woman thinks nothing of driving a car with mechanism more complex than that of the oil burner. The clutch, brake, gearshift, and other parts of the automobile are as nothing to her. Why should she not be able to handle an *automatic* oil burner just as easily?

Attempts to simplify oil burners have not, to my mind, proved successful. I believe that future development will be along the line of improving the present successful burners equipped with positive fuel feeds and with automatic controls. The next few years will see a development in oil burners as remarkable as has been the development of automobiles since 1905.

"What advantage has an oil burner over coal?" is another question.

By Collins P. Bliss

*Professor of Mechanical Engineering,
New York University*

Houses that today require the services of a man to remove ashes can save the cost of his labor by installing an oil burner.

A good oil burner, properly installed, can be operated just as cheaply as a coal furnace. From 140 to 150 gallons of oil in actual use are required to give heat equivalent to that produced by a ton of coal. At 9½ cents a gallon this is equivalent to about \$14 a ton. With coal at about \$16 a ton at present, it is apparent that oil is cheaper.

Installation Cost


Of course, the original investment with interest must be considered. A coal-burning furnace in a seven-room house can be transformed to an automatic oil-burning furnace for from about \$600 to \$800. Yet the saving in fuel over a period of years will go a long way toward paying the principal and interest of this investment. Then, too, it is not unreasonable to assume that coal prices will continue to mount as in the past and that they may climb soon toward \$20 a ton. At such a figure it is absolutely certain that oil would be the more economical fuel.

To install an oil burner all that is necessary is to remove

the grates of the coal furnace, insert the nose of the burner and fasten it in place. A careful survey should be made to see that there are enough radiators or registers to give heating surface sufficient to heat the house. At the same time the most advantageous location for the thermostat should be determined. This is important because a direct draft of cold air or direct heat from any source will cause the thermostat to register falsely.


Another question often asked is, "What type of oil burner shall I buy?" As I said before, numerous types of oil burners are available; they fall under three general classifications: vaporizing, air atomizing, and steam atomizing burners.

In the vaporizing type, oil is fed by drops to a burning vat or bowl, lighted with a match. A jet of air produced by the chimney draft impinges on the surface of the oil, supplying the oxygen for combustion. No attempt is made to mix

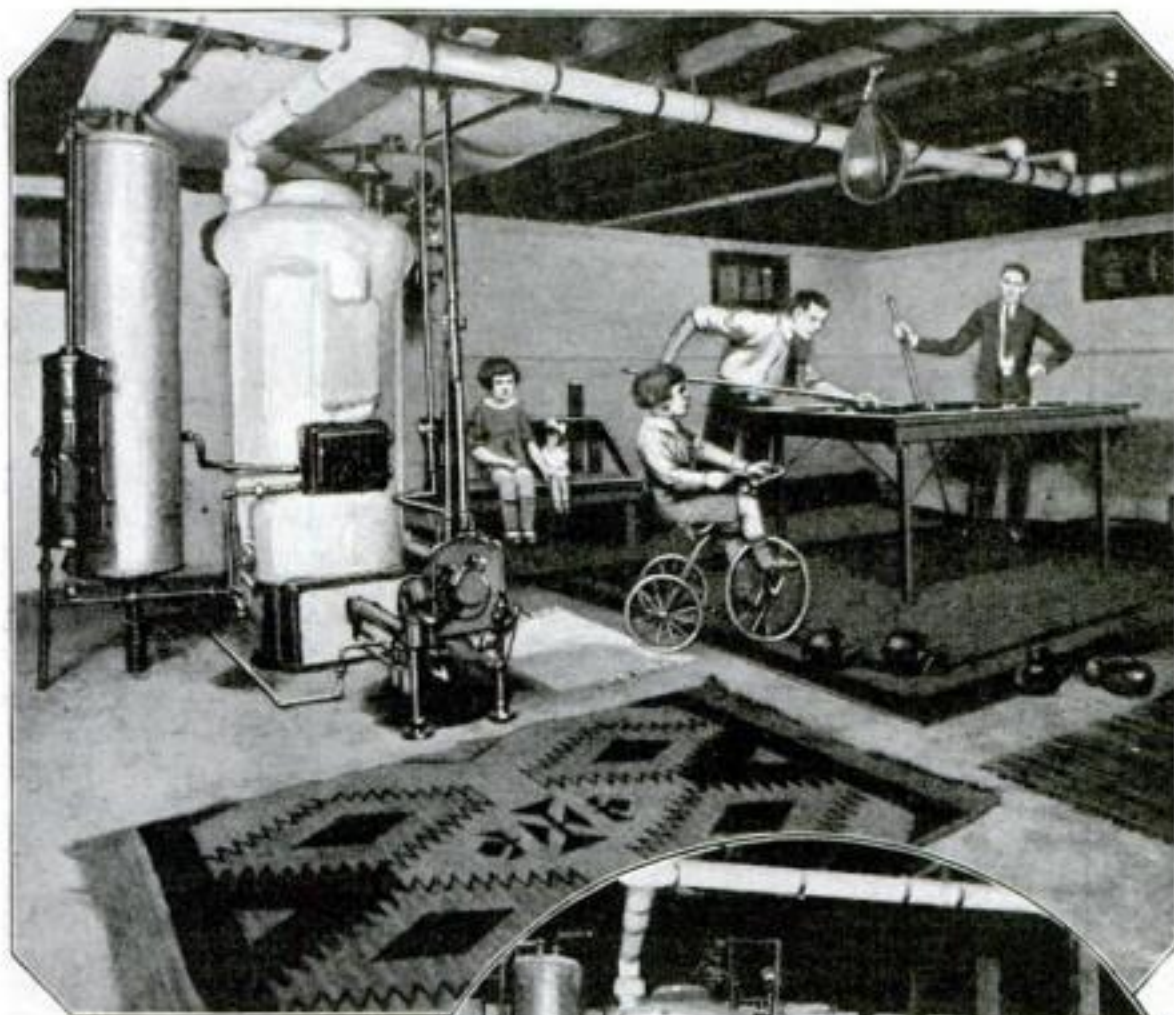

MAKING THE
CELLAR LIVABLE

THESE two pictures show how one home owner, by installing an oil burner, transformed his furnace room from a dingy place of dust and ashes into an attractive, carpeted billiard and play room. At the right: The cellar as it was, littered with ashcans and ashes, and marred by an ugly coalbin. Above: The same cellar with its oil-burner installation

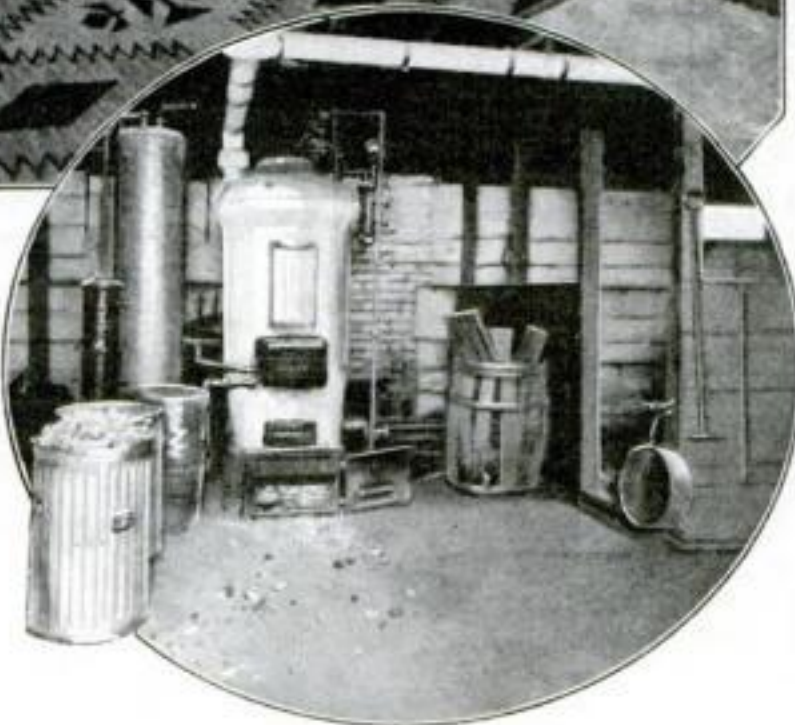

One advantage is convenience. For example, a thermostat, located in the living room, registers the temperature in the house. When the temperature drops below a predetermined mark, an electric control is operated, the burner lights automatically and the furnace generates heat. Similarly, when the temperature is too high, the burner automatically shuts off. This automatic process continues day and night whether any one is in the house or not.

Oil Burner Saves Many Steps

Obviously there is no need of going into the cellar to shovel coal into the furnace every little while, nor is there night banking of fires and a cold house in the morning.

Then, too, there are no ashes. All the oil burns without soot or smell. The gases go up the chimney and no residue remains.

the oil in small atomized particles with the air before combustion. The result is that much carbon often forms, causing large chimney losses and a poor transfer of heat. While these burners will work well in places where the natural draft is good, they cannot without previous test be applied successfully to every type of house furnace.

The air-atomizing type utilizes the principle that air and minute particles of oil form a highly combustible mixture. The air is provided either by means of electric fans or an air compressor. The air is shot from a nozzle at great speed, sucking oil from another nozzle close by. The oil is broken up into small particles and the mixture is ignited, either by a gas pilot light or by an electric spark plug.

Observe These Points

The steam atomizing type follows the same principle, but uses superheated steam as the carrying agent.

"Which type and which particular burner should be selected?" is the final question to be answered. Since there are a number of different burners that will work well, it is well to observe the following points:

1. There should be a positive air supply, provided by compressed air, fan, or steam.

2. There should be a dependable source of power control for auxiliaries, such as gas or electricity.

3. There should be automatic controls to start and stop the flame.

4. Oil and air feeds should be easily adjustable.

5. The burner must fit the furnace. A big burner in a small furnace will only

from the particular burner you are considering. A coal fire needs less chimney area.

7. The flames from the burner must not strike an unprotected surface and so burn out the boiler flues, tubes, or other parts.

The oil burning system includes two tanks, the burner, piping, and electric wiring. A large storage tank varying in capacity from about 200 to 1130 gallons, is buried outside the house. City ordinances require adequate protection of this tank. Some localities require a one half to one foot coating of concrete. In other places a covering of sand and a slab of concrete are deemed sufficient. Before purchasing a burner it is well to investigate the local ordinances regarding the installation of furnaces.

For Oil Storage

Oil from the buried tank is led to a smaller tank of about 60 gallons in the cellar. Here again some city ordinances require that the oil be pumped into the cellar instead of using gravity.

Many ships long ago discarded their coal bunkers and substituted oil tanks. Then factories, large office buildings, and apartment houses fell in line. Thousands of such installations are now in operation. In all these plants, the boiler rooms look as spick and

span as hospital operating rooms. It is only a question of time when oil will replace coal in many homes also.



Typical installation of an oil-burner system, showing location of oil

How to Insure against Danger

IN THE use of oil as a heating fuel in your home, a few simple precautions are offered by experts, as follows:

1. Be sure the apparatus is installed in accordance with regulations of fire underwriters and city ordinances.

2. Inspect the system daily. If a pilot light is used, see that the tip is free from carbon. Never use a naked light in hunting for leaks.

3. Before starting the burner, be sure all flues are clean and dampers are open wide.

4. Keep the furnace room free of papers, rags, and other rubbish.

5. Don't allow unignited oil to spray or drip from the burner into the furnace.

6. Don't allow any person to experiment with the apparatus.

7. Have the entire system thoroughly overhauled at the beginning of each heating season, preferably by the company that installed the burner.

waste fuel and in time injure the furnace.

6. The chimney of your house should be large enough to take away the gases

Storm Sash Opens when Window Is Raised

LIFTING a window, if it is equipped with the clever device shown here, simultaneously lifts the storm sash, thus eliminating the extra effort usually required to raise and fasten the storm

sash independently.

The secret of the device lies in two lifting arms fastened to the inner sash and extending to the storm sash. The outer ends of the arms are fitted with roller bearings that run on tracks attached to the side members of the storm sash. Thus, as the inner window is raised, the storm window swings out.



How the storm sash is swung open by window



Six-Story Building Moved by Six Horses

SIX Los Angeles horses recently accomplished the astonishing feat of moving a six-story brick building, weighing 11,000 tons, for a distance of 125 feet. They did it with the aid of a series of tracks over which the structure moved on rollers.

The building housed a hotel which had to be moved from a site purchased by Los Angeles for municipal buildings.

Nineteen double tracks, a total length of a mile, were used. Forty-five lines of

cable, totaling 8100 feet, and three capstans conveyed the power supplied by the horses. The cable, tracks, and capstans were so arranged that the six horses pulled with a strength equal to that of 5400 horses, a multiplication of 900. The moving was, of course, 900 times slower than it would have been with 5400 horses pulling.

Fourteen hundred jacks were used. The distance covered in any day was 40 feet.

How to Fix Your Plumbing

First Aid Methods Any Householder Can Use when Water Pipes Leak or Burst in Winter

By John H. Schalek, M. E.

TO MOST of us the plumbing systems in our homes are like our teeth—we do not realize that we have them until something goes wrong. Then, when something does go wrong, we are quite helpless. Even the handy man who does a little carpenter work and painting about his home and perhaps tinkers with his automobile rarely will attempt to repair his plumbing, simply because he thinks that plumbing work is difficult and mysterious, requiring a very special kind of skill and unusual and complicated tools.

This is not so. Nearly any man, with the common tools found in almost every household, and without special mechanical skill, can do his own plumbing repair jobs. Most of these are emergency jobs—such as mending leaks that develop suddenly, endangering valuable furniture, rugs, wallpaper, and other household possessions. Every man should know how to give first aid in such cases as these. It is no more sensible to permit a serious leak to ruin your house furnishings while you try to summon a plumber than it is to let blood flow from a cut in your hand while you wait for your doctor.

Turning Off the Water

The first thing the amateur plumber should learn is how to turn off the water supply to the house. In many modern homes a shut-off valve, similar in appearance to the shut-off valve of a steam radiator, will be found beside the water meter.

If there is no shut-off valve in the house, the water supply may be turned off at the curb box. This box usually will be found near the street curb at the front of the house. If the position of this box is not known, often it may be located with the aid of an ordinary compass.

First find the place in the cellar where the water pipe enters; then, following the line of this pipe and holding the compass as close to the ground as possible, walk slowly to the curb. As you approach the iron curb box, the needle or disk of the compass will be deflected and it is then a simple matter to uncover the box and shut

YOU'LL be surprised as you read this article to discover that you don't need to be even a halfway mechanic—you hardly need to know one tool from another—in order to doctor the inevitable plumbing ills about your home. In simple terms an expert mechanic tells just how to do it quickly and effectively.

This is one of the most helpful of the articles appearing in POPULAR SCIENCE MONTHLY each month, telling the amateur how to do odd jobs around the house. You'll discover much real recreation and enjoyment in learning how to "fix it yourself."



Locating the curb box with a compass. The compass needle is deflected as you approach the iron box

off the water with a key.

The water supply can be shut off from certain pipes by turning the valves found beneath sinks and wash-bowls, or in the cellar. If you do not know what pipes in your plumbing system these valves control, try the valves one after the other, and tag them against possible emergencies in the future.

Faucets and other valves that leak be-

Severed Pipes Easily Joined



Hammer each severed end over the union; join the half unions

After cutting the broken water pipe, insert each of the severed ends in an ordinary half union. Then chip off the tongue of the union as shown above



How three sections of pipe are joined tightly by ordinary pipe unions



The first step in an emergency—turning off the water in the curb box. One full quarter turn shuts off the average cock

cause the washer has become worn, waste an almost unbelievably large quantity of water. Leaking at the rate of only 10 drops a minute, the ordinary faucet will waste about 200 gallons of water in a year. Two leaking hot-water faucets will cost the householder at least a dollar a year in gas alone—enough to pay for 50 good washers.

To replace a faucet washer, first shut off the water from the house. Then close the faucet tight. Next unscrew the large nut connecting the handle with the body of the faucet. When this nut is free, unscrew the faucet by the handle.

If the Screw Is Corroded

When the core of the leaky faucet is out, look at the small screw that holds the washer in place. If the screw appears to be badly corroded so that it might break off when the screwdriver is applied, cut the washer out with a sharp knife and take the screw out afterward, using pliers if necessary. Trim the new washer around the edges until it fits closely into the recess in the core. Then replace the screw, screw in the core of the faucet as far as it will go, and tighten the large nut.

Leaks at pipe joints—joints where the pipe screws into couplings, unions, and other fittings—are due to strains or excessively worn threads. Unscrew the joint and smear a little thick paint, tar, or other heavy oil compound on the external thread—that is, the thread inserted in the joint.

If this should not stop the leak, coat the thread with a low melting point paste solder and heat with a flame until the solder has

melted; but do not permit the solder to fill up the threads.

It is well to have some litharge about the house. This is a yellowish powder that may be obtained at any hardware store. Mixed with boiled linseed oil, it forms a thick paste that can be used on pipe threads to make them tight.

Leaks in piping due to rust and freezing are repaired more easily than is generally imagined. When the emergency arises, two or more machinist's clamps, obtainable at hardware and often at five and ten cent stores, a piece of ordinary rubber gas tubing split longitudinally and a piece of heavy sheet iron will stop even very serious ruptures effectively. If the clamps are not available, an ordinary strap hinge and a large carriage bolt will prove effective.

An emergency leak clamp, successfully used by gas companies on gas lines holding more than 200 pounds pressure to the square inch, also has been used satisfactorily to stop water-pipe leaks.


Making the Emergency Clamp

All you need is a piece of wire, a piece of soft rubber, such as gas tubing, auto shoe, or inner tube, a piece of iron to act as a lever, and a piece of iron or wood, preferably in the shape of a wedge. The farther the wedge is driven in, the greater will become the pressure on the rubber packing.

A piece of rubber large enough to cover the burst section of the pipe and wrapped tightly on the pipe with heavy twine or wire also is a satisfactory way of repairing leaks temporarily.

Contrary to popular belief, it is impractical, if not impossible, to repair a leaking lead pipe by soldering. The pipe must be severed and rejoined. Since exceedingly skilful manipulation is required to cut the pipe at the point of leakage and wipe the joint, the following method will prove the simplest for the average man:

Cut the lead pipe with a saw. Select an ordinary pipe union large enough to allow the lead pipe to slip through readily. The tongue of the half union

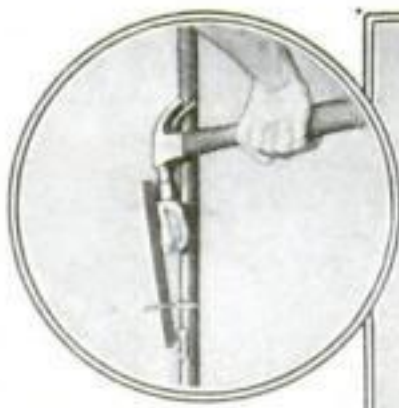

This simple emergency leak clamp is made of a small stick, a wire, a stone wedge and a piece of rubber. Hammering the wedge toward the wire fulcrum brings pressure on the rubber covering the leak.



Two ways to stop a pipe leak temporarily. Above: A piece of rubber large enough to cover the burst section of the pipe is wrapped tightly with heavy twine or wire. At right: Ordinary gas tubing and a piece of heavy sheet iron are fastened about the broken pipe with machinists' clamps.



is chipped, sawed, or ground off. One severed end of the lead pipe then is inserted in the union and the end hammered over the union seat. The same operation then is performed on the other end of the pipe and half union. After both pipe ends have been fastened in the union halves, the ends are brought together and coupled by the union ring.

In cases where the rupture is large, so much of the lead pipe must be cut out that it will be found impossible to bring the ends together. In this case two unions are needed. A piece of lead or iron pipe of suitable length is inserted between the unions, bridging the gap between the pipe ends.

Unions of this size may be bought for about 50 cents each and a job for

Two Simple Ways to Mend Small Holes in a Boiler



Small holes in the boiler can be stopped either by inserting a tapered wooden plug or by fitting a stove bolt, as shown above.

which a plumber would charge \$10 actually can be done for less than one dollar and a half.

When a hot-water storage tank develops a leak, most householders consider it beyond repair. But a small hole can be stopped easily by driving a tapered plug of white pine or walnut into the hole. The writer knows of one case where a plug inserted three years ago is still doing service. The plug should have a very gradual taper with the entering end almost as sharp as a needle. It is driven in with a hammer after it has first been soaked in water and the projecting end cut off within half an inch from the tank surface.

Where the hole in the tank is one quarter inch in diameter or larger, a most effective and workmanlike repair job can be made by using a stove bolt, two inches or more in length, a nut, a rubber washer, and two iron washers. Split one of the iron washers with a cold chisel. Slip the head of the bolt through the hole. Now place the split washer over the bolt and slide the washer against the boiler. Holding the bolt end firmly in one hand, screw the washer in through the hole with the other.

Once the washer is inside the tank, the head of the bolt cannot be pulled out. All that is necessary then is to put the rubber and iron washers on the protruding bolt and screw the nut tight.

Cover All Exposed Pipes

Leaks resulting from the bursting of frozen pipes cause much plumbing trouble at this time of year. Water pipes should not run in exposed walls. If you have such pipes in your home and they are accessible, they should be wrapped with sheet wool of a thickness of not less than three inches. But the surest way of preventing pipes from freezing is by shutting off the water at night and at other times when the house is without heat. After the water is shut off, the pipes should be drained at faucets, drains and flushes.

If the house is left vacant in the winter, about two quarts of kerosene should be poured into closet bowls and a pint into each sink, washbowl and bathtub to prevent the traps from freezing and bursting during the severe weather.

These are plumbing jobs that every man should be able to do. Performing such simple repair tasks yourself will save you money—not only in plumber's bills but in house furnishings that easily might be ruined even by a very small leak.



A split washer, screwed in through the leak hole, holds the head of the stove bolt inside the boiler so that it can't slip through.




Parts of the stove bolt plug shown at the left—a split iron washer, rubber washer, unsplit iron washer, bolt and nut.

Autos in China Must Wear Mud "Splashes"



ORDINARY mudfenders are not sufficient in China, for the law there requires that pedestrians, as well as a car and its occupants, be protected from the splashing of mud. Accordingly, all automobiles in China are

equipped with "splashes" on all four wheels. Each splasher consists of a strap-iron frame hung from the axle and encircling the wheel, from which hangs a heavy fringe of fiber or leather long enough to touch the ground.

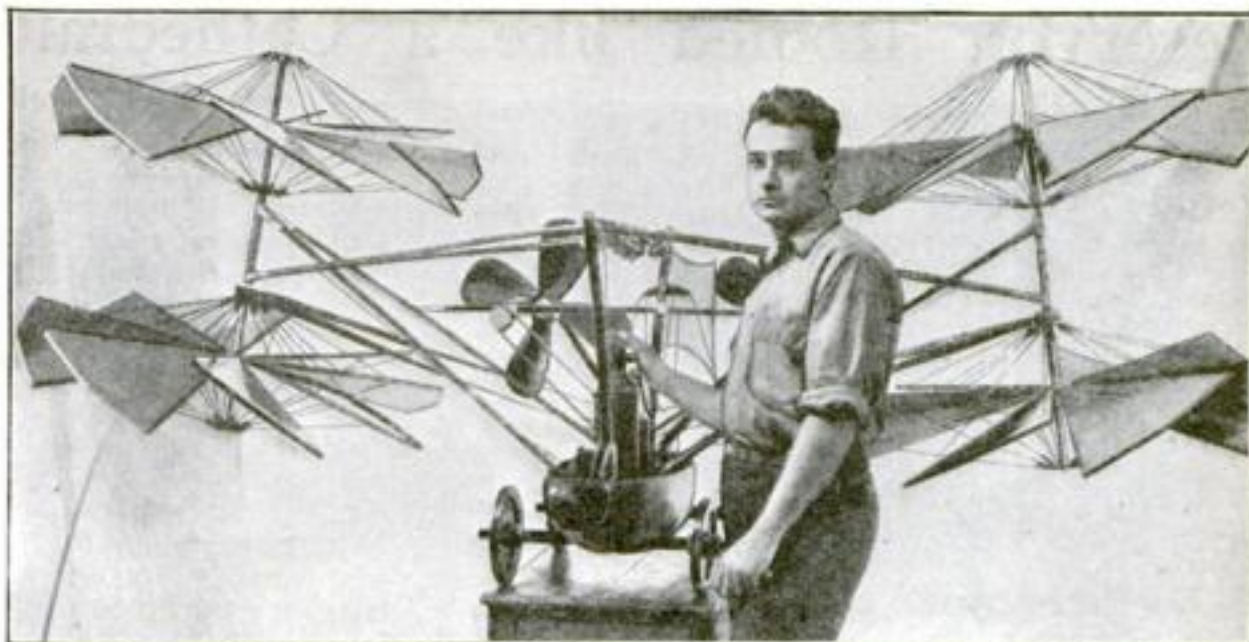

Remodels Helicopter Invented 80 Years Ago

A MODEL of a helicopter from plans drawn in 1843 by Sir George Cayley was constructed recently by Paul Garber, custodian of airplane models in the Na-

tional Museum at Washington, D. C. The design, although conceived years before an airplane flew, is strikingly similar to those of recent helicopters.



Broadcasting in the Jungle

THIS is a broadcasting station in the South American jungle—an amazingly noisy signal drum hollowed out of a log and used by the Tucanos for maintaining communication when hunting.

Playing with Thunderbolt

THE scientific experiment of passing more than a million volts of electricity through one's body ordinarily would terminate one's scientific career. But Earl Holm, a senior at the University of California, Berkeley, Calif., here is shown performing that experiment with impunity, manufacturing thunderbolts as nonchalantly as might ancient Vulcan.

The secret of his apparent daring lies in septuple insulators on which the "operating" chair rests.



Strange Spider Monkey and Its Baby Captured



THIS spider monkey with her baby, which is said to be the only one in captivity, recently were presented to the San Diego, Calif., zoo by a detachment of United States marines stationed at Nicaragua. The spider monkey is so called on account of its extremely long, slender limbs and long tail. These are constantly employed in climbing.

This Pig Walks on 26 Toes

ON A Nebraska farm recently a pig with 26 toes was born, one of a litter of seven, the others being normal. Both front feet are double, and the left hind leg terminates in a veritable cluster of toes.



Reservoir Roofed like a Cathedral




A forest of columns, 35 feet high, supports the enormous roof

THIS covered reservoir of reinforced concrete, an unusual piece of construction on account of the magnitude of its dimensions, was completed recently for the waterworks of Cleveland, Ohio.

Its enormous roof, approximately 1000 feet long and 500 feet wide, consists of groined-arch panels, supported by a forest of thick columns. Standing within the Baldwin Reservoir, one could readily imagine himself in a great cathedral.

The volume of concrete used in making the units—walls, 1196 columns, 2208 groined-arch panels, and as many sections of floor slab—amounted to 104,100 cubic yds.

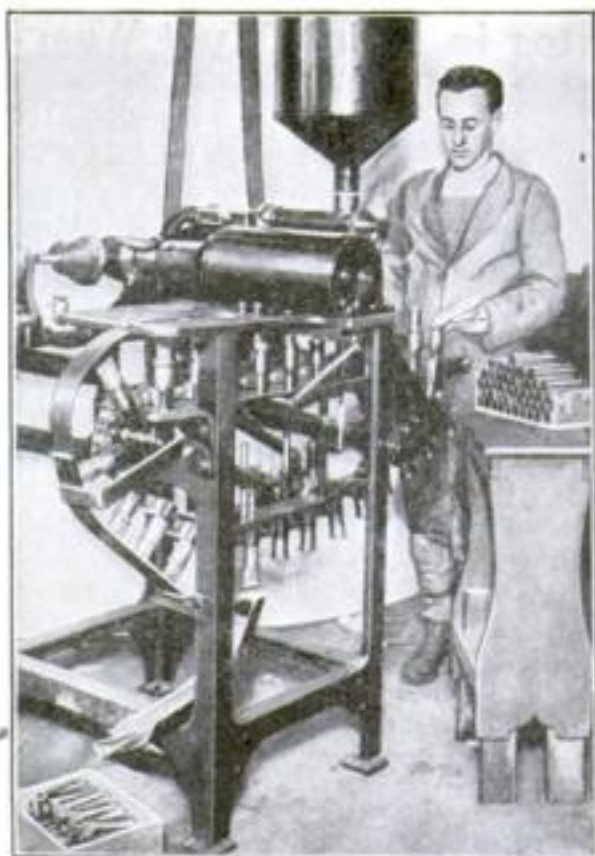


Toothpaste Tubes Filled by Machinery

HOW machinery puts toothpaste, cold cream, and shaving cream into the tubes is pictured above.

The empty tubes, in sockets, run on an endless band under a nozzle, where they are filled with the cream preparation drawn from a vat. After the filling, they are carried to a sealer that clamps together the open ends, bends them over, and stamps them into a tight seal. The tubes are held in place by the semi-circular metal strip shown at the left until they are directly above a chute, which conveys them to a packing box.

Automatic Car Coupler Saves Injury to Crew

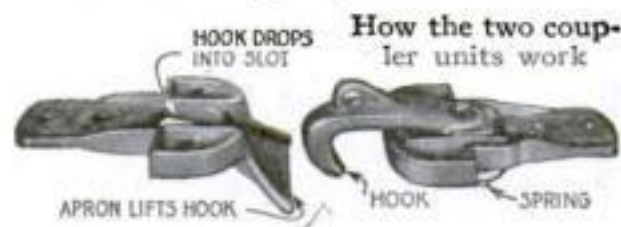

AN AUTOMATIC safety coupler for mine cars has been perfected to lessen the number of casualties caused by the crushing of hands and bodies of workmen in making up trains of cars and later in uncoupling them.

The coupler is made in two sections, one fitting on the rear of the car and the other on the front. When two cars thus fitted are rammed together, an apron on one section of the coupler raises a hook on the other. This hook immediately drops into a slot in the first apron.

Sufficient play is allowed in the hook connection to prevent breaking of the coupler due to impact when the train is started with a jerk.

WHEN soft coal is burned in the furnace, soot can be removed quickly and easily from flues and heating surfaces by throwing a pound of common salt, thoroughly dried, on the burning fuel bed. Immediately upon charging with salt the furnace becomes filled with dense, white fumes.

Uncle Sam Builds Huge Army Tanks

TANKS with many times the terrible destructive force of those that proved so deadly in the closing months of the Great War are being developed in experiments at Camp Meade. The illustration* shows a lately evolved model splintering trees on the testing ground.

Not all of the experimental work is with fighting tanks. Tanks that can transport large guns, ammunition, infantry, signal apparatus, construction material, safely and rapidly for miles over

ground deeply pitted with shell holes and blocked by obstructions are vital to the success of the terrible fighting tank.

"BALSAM wool," a new heat insulator and sound-deadening material for buildings, excelled only by human hair and sheep's wool in insulating efficiency, is prepared from pulp, wood bark, and sulphite screenings. It is flexible and resistant to fire and water. It weighs only 253 pounds to 1000 square feet.



Testing one of the huge new army tanks over rough country

This Milk Bottle Uncorks at the Bottom

A MILK bottle that uncorks at the bottom, making it possible to draw off the milk while retaining the cream in the bottle, has been invented by Ray Dunn, of Tipton, Ia.




The bottle has a small opening at one edge of its bottom surface. This opening normally is closed by a cork to which is attached a cord or tassel. When the cork is pulled out, the milk will flow from the bottom of the bottle, thus

making it easy to empty and solving the problem of separating the milk from the cream.

The hole also assists in cleaning the bottle, which is filled in the usual way.

TO MAKE sure that a ring or other piece of jewelry is gold, drop it in nitric acid. Neither gold nor any precious stone will be harmed. The acid quickly attacks imitations, whether they be of precious stones or of gold.

Windmill Supplies Light

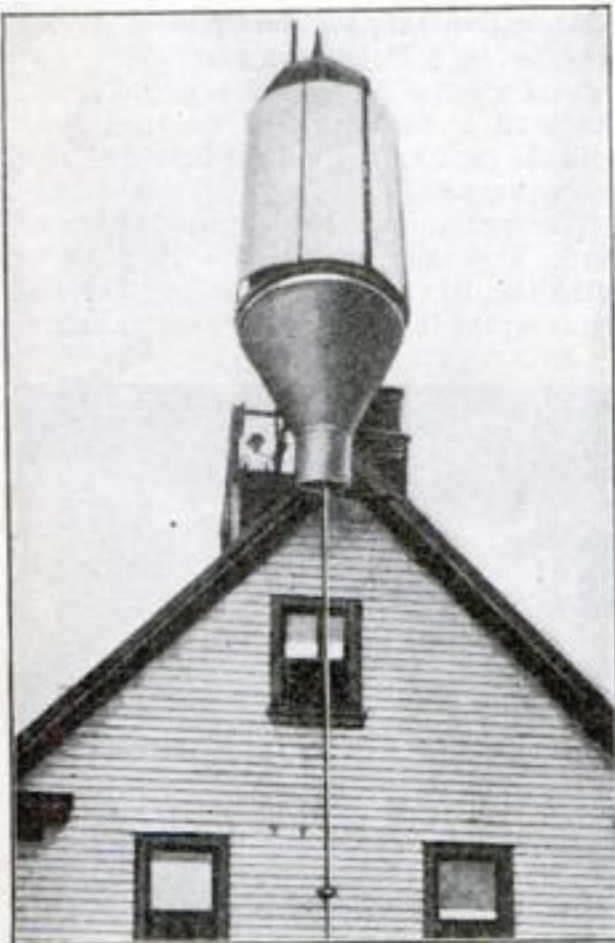

BY INSTALLING a windmill on his roof, a resident of East Cleveland, Ohio, lights his home almost without cost.

The windmill consists of eight perpendicular "sails" attached at top and bottom to circular, revolving frames. These are connected with a special one-kilowatt generator. The windmill is about 15 feet high and 50 feet above the ground.



Above: A diamond-bearing river bed exposed by diverting the stream from its course. At the right: Crushing blue clay from the mines to expose the gems for gathering



How Kimberley Diamonds Are Mined

TWO methods by which the diamond, king of gems, is thieved from Nature's treasure chests are revealed by the illustrations above, showing scenes in the famous Kimberley district in British South Africa.

The larger picture shows a diamond-bearing river bed exposed by diverting the stream. Such streams carry diamonds down their course much as many Western streams in the United States bear down nuggets. Claims are staked out in the dried bed, 50 per cent of the value of the discoveries going to the Government

and 50 per cent to the claim holder. As in placer mining, virtually no digging is necessary, many of the stones lying on the surface.

The smaller picture shows a tractor crushing clods in a blanket of blue clay that has been brought up from the diamond mines and spread over the ground. This clay lies weathering for a year, during which it is plowed and smashed frequently. The conditioned clay then is taken to a separating mill.

Barbed wire charged with a deadly electric voltage guards the field.


Manufacturing Lightning in Movies

THIS machine produces flashes of lightning for moving pictures. The flashes are quite harmless, but are realistic enough to be terrifying when viewed on the screen.

The apparatus, which is of wood, is wired like a street arc lamp, except that several carbons are used instead of only two. About a half dozen of these are fastened to an upright arm and a single large carbon to a projecting arm. The latter can be moved back and forth by the attached rope.

When the single carbon is brought in contact with the group, a great

flash of light is produced, registering with spectacular effect on the moving picture film.

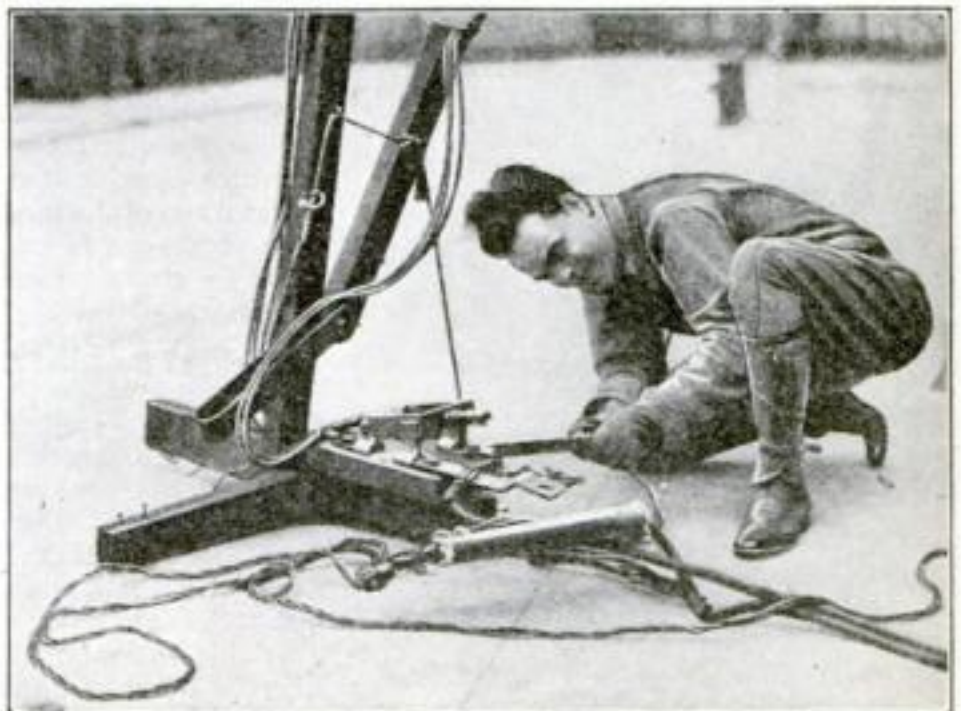

The arclight machine that produces dazzling lightning flashes

© Keystone



How the special nozzle, at left, throws an umbrella-shaped water screen

Nozzle Throws Water Barrage for Firemen

A UNIQUE type of fire hose nozzle, which, in addition to throwing a stream on a fire also supplies a curtain barrage of water to protect firemen from the heat, has been developed by a San Francisco concern.

A recent demonstration proved that the umbrella-shaped screen of water nullified the effect of the heat sufficiently

to permit firemen to insert the nozzle into a tank of burning gasoline. Also, the protecting stream, by cutting off the supply of oxygen from the fire, caused it to be extinguished almost instantly, a thing it would have been difficult to accomplish with the ordinary solid stream.

Using this nozzle, one man can handle a line carrying 150 pounds pressure.

Springs to Heat Iceland

ICELAND is planning to utilize its natural hot springs and geysers in place of coal to heat the whole country, according to reports from Bergen, Norway. Preliminary plans call for wooden pipe lines to carry the hot water from the springs to the cities.

Rocker Quickly Converted into Wheel Chair

CONVERSION of a rocker into a wheel chair is accomplished in a few minutes by clamping to its base the special set of four wheels as shown below. The small rear wheels turn in any direction for steering. The foot rest is adjustable and the front wheels can be locked in position. A nurse evolved the invention.



A wheel chair made from a rocker



Novel Megaphone Amplifies Voices of Singers

E. W. CORNELL, of Adrian, Mich., has designed this strange megaphone for use by singers. The large flare of the funnel is said to furnish amplification of tone without distortion.

The peculiar face piece was devised to produce clear enunciation by permitting normal use of the face and mouth muscles. The appliance is said to be particularly good for church singers and broadcasting.

Says We Can Signal Mars


THAT it is entirely possible for the earth to signal Mars by means of signal lights produced at high altitudes by airplanes is the belief expressed by Dr. A. M. Low, an English inventor.

By chemicals, he says, there are ways to produce signals of sufficient size to be readable on Mars, if intelligent beings live there. Wireless, he says, is impracticable. Because wireless waves travel in curves, he observes, it is hard to hit the target.

One-Man Ice Saw Driven by Auto Engine

AN INGENIOUS ice saw driven by an automobile engine cuts nine inches deep at the rate of three feet a second. It is the invention of S. E. Kurtz, of Sac City, Iowa.

The saw is connected directly with the crankshaft of the auto engine, eliminating the transmission. Because of its lightness, automatic spring saw hoist, and automatic gage fingers, one man can operate it.

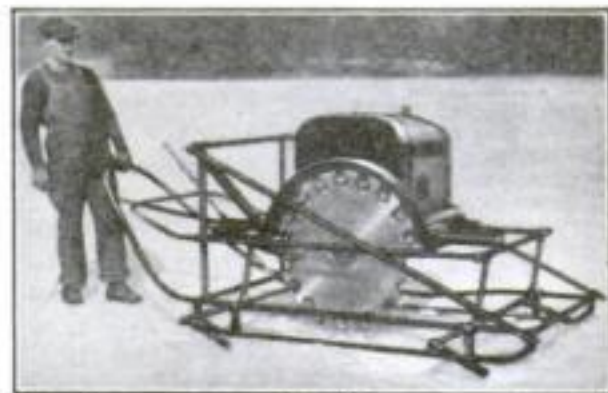

An auto engine drives the saw

Hope for O. D. Uniforms

THE American Chemical Society is attempting to perfect a domestic dye that will make the faded O. D. uniforms of General Pershing's men look alike in color.

Safety Candle Holders for the Christmas Tree

PERSONS whose homes are not wired for electricity may use lighted candles for Christmas-tree decoration with comparative safety, thanks to a device invented by a Pittsburgh man. This consists of a series of extensible metal arms. Fastened to the trunk of the tree, they hold the candles beyond the branches and decorations.

The arms may be adjusted to any angle, and they are fitted with pans to catch the drip from the candles. The apparatus may be used also for electric lights.



Arms hold candles away from tree



© Keystone

Gas Stove Placed in Tub Heats Bath Water

UTILIZING an odd design of gas stove, a German inventor has devised a quick method of heating water for the bath. After the bathtub has been filled with cold water, the gas stove is placed in the tub until the water is hot enough.

The design of the stove permits a maximum of heat to be transmitted to the water without danger of explosion or extinguishing the flame, for the flame jets are in the upper part of the stove and the lower part is watertight.

Handle of Walking Stick Serves as Flashlight

THE difficulties and hazards of walking over rough roads by night are greatly lessened by this ingenious combination of walking stick and flashlight.



A battery and lamp are set in the handle of the stick, the lamp being attached in such a way that it appears to be only a metal cap for the handle. The pushbutton activating the lamp is located inconspicuously under the handle.

Finding small change, reading house numbers, or looking at one's watch are illustrations of the invention's usefulness.

Aspirin Freshens Flowers


THE best way to revive withering flowers is to dose them with aspirin, according to the announcement of a French scientist. He claims to have discovered that an ordinary aspirin tablet dissolved in warm water will freshen the most delicate cut flowers in vases.

Bathers Rescued by Novel Lifeline

THREE drowning persons were rescued recently from what is said to have been one of the roughest surfs ever recorded on the Pacific coast by a remarkable torpedo-shaped life-saving buoy that enabled the rescuers to carry a life-line to the persons in distress.

The device has a range of 1000 feet from shore and weighs but 25 pounds. Two persons, only one of whom need be a swimmer, operate the apparatus.

A reel containing 1000 feet of sounding wire is suspended from the shoulders of the man on shore. It is attached also to a wide belt about his body so that the strain of pulling in the reel is distributed. Connected with the reel by a sounding wire is a cylinder, with torpedo-like ends to cut the water. The wire connects also

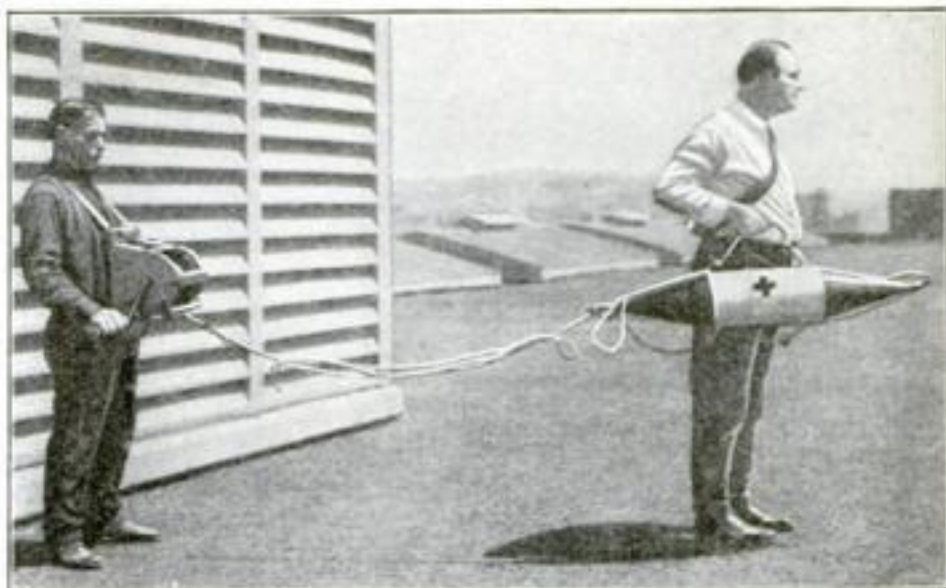

The rescuer swims with the buoy attached to reeled line

with a harness worn by the second man, who swims out with the buoy to the victim. The cylinder has great buoyancy and, it is said, can be carried nearly twice as fast as the standard carry life-buoy.

If the wire becomes entangled in seaweed or wreckage, the rescuer releases a snap swivel that frees him from the wire and swims in, using only the cylinder.

Concrete Granary Filled by Motor

A CONCRETE granary and cornerrib, scientifically ventilated and containing a motor-driven elevator that fills it automatically, has been designed and constructed by F. W. Benjamin, on his farm at Bloomington, Ill.

While the building follows the design of the familiar silo, it is constructed of con-

crete staves. On two sides of the building the staves are supplied with vent holes that permit the air to circulate through the stored fodder and prevent it from spoiling.

Under the structure is a passageway large enough to admit a horse and wagon or motor truck when the fodder is being stored. The corn or grain is dropped from the rear of the wagon into a trough, whence elevators convey it upward and store it automatically when a motor is started. The fodder is removed from the crib by gravity. The designer of the granary points out that it is fireproof, ratproof, and does not have to be painted.


Buildings of this sort are adapted not only for the farm, but may be used also for the storage of coal and similar materials.



The concrete granary and its storing machinery, showing motor-driven elevators that convey corn from the wagon



World's Biggest Torch-Cutting Job

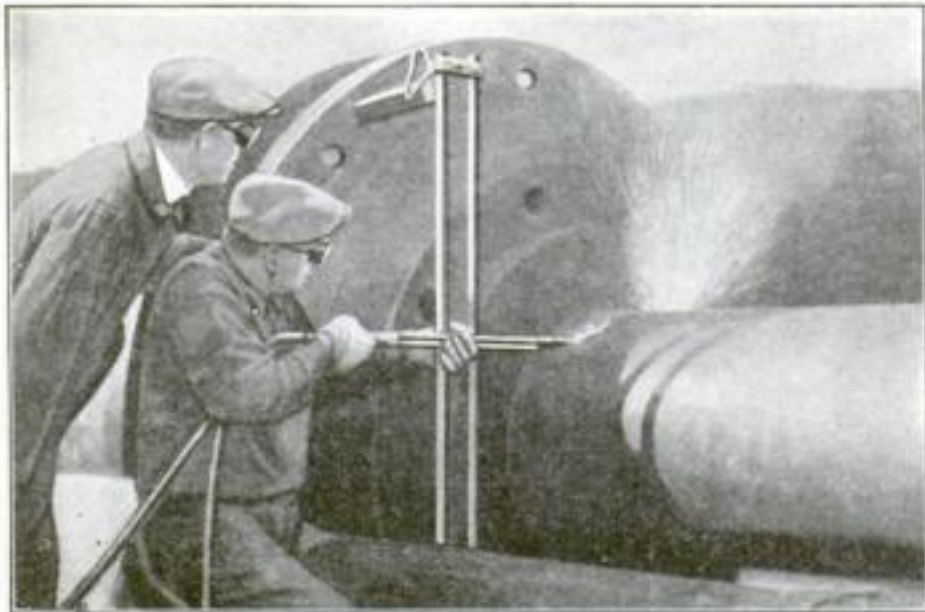

UNDER the fierce heat of an acetylene torch, the 27-inch solid steel shaft shown here was cut in two in about 15 minutes recently in a railroad yard in Los Angeles, Calif. This is said to be the biggest job of acetylene cutting ever undertaken. Sixteen tubes of oxyhydrogen gas were consumed, maintaining a constant temperature of 3500° F.





Setting hand saw with rotary tool

Protractor and Depth Gage Combined in One

A RECENT contribution to the list of time-saving machine tools by a concern in Athol, Mass., is a combination protractor and depth gage in which the protractor arm serves as the blade of the depth gage. Any desired angles can be laid off or measured and the depth of machined channels can be determined.

When the device is used as a protractor, any angle in one half a circle can be laid off with the blade, and the angle of a piece of work measured. For use as a depth gage the blade can be set at any length within six inches. When thus used, a set-screw is loosened and the blade set to project any distance below the protractor base. Lining up the blade along the 90° mark at the top insures accurate measurement.

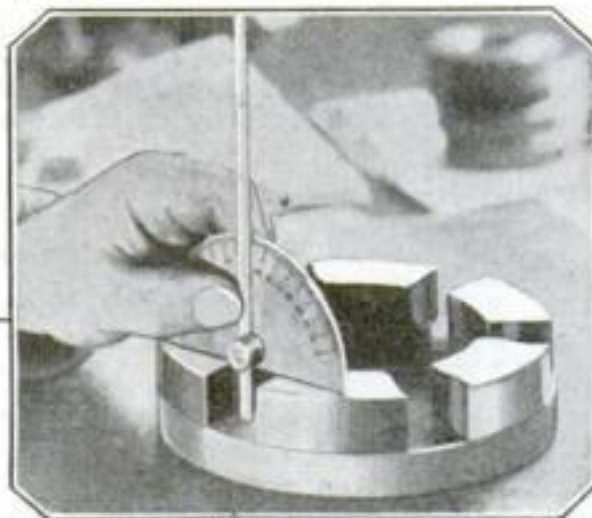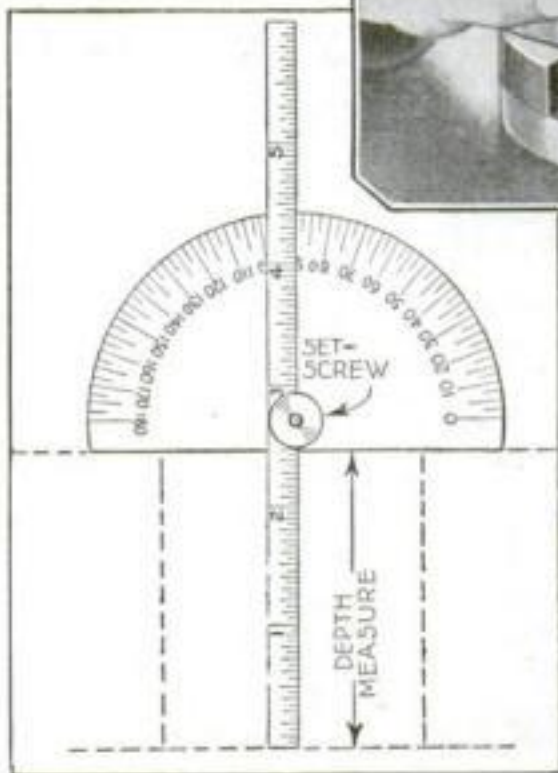

Above: Measuring the depth of a slot in a machined casting with the adjustable protractor-depth gage

At the left: How the protractor arm serves as the blade of the depth gage. For adjustment, the set-screw is loosened and the blade set to any desired depth

Hand Saws Set in Minute by New Rotary Tool

A ROTARY saw set recently patented is said to set a hand saw accurately in one minute. Guide bars hold the saw in place and an adjustment at the bottom, by a turn to the left or right, accommodates the particular width of the saw being set.

Different set wheels are required for saws with varying numbers of points to the inch. These are changed easily. Drawing the set once the length of the saw completes the setting.

Barrel-Header Is Driven by Oil Pressure


AN ENTIRELY self-contained barrel-heading press, driven by oil pressure has been devised by a Florida man.

A pump supplying the pressure is mounted directly on the base of the machine and connected by a short nipple with the base casting. In this casting are oil passages and a rotary valve controlling the operation of the plunger. The oil reservoir is cast into the base of the machine. Two operating pedals raise and lower the press.



Oil pump applies pressure to head

Combination Machine Tool Cuts Two Ways

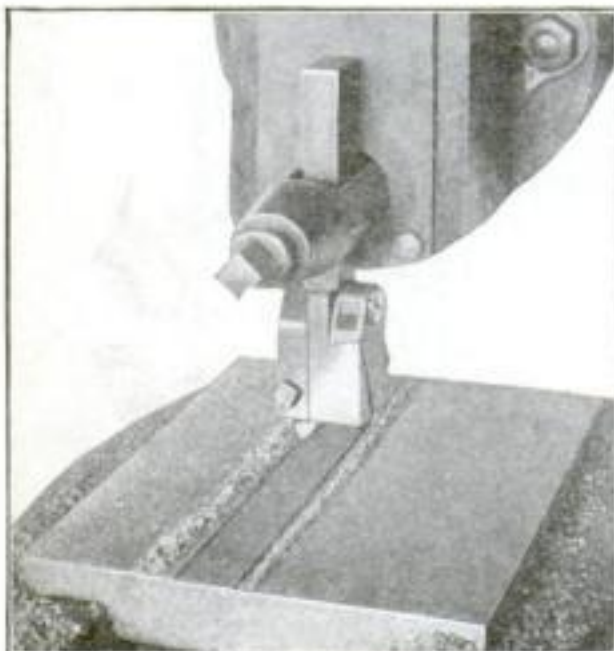

Roughing and finishing with two-way tool

THIS novel machine tool and holder, designed for cutting on both the forward and return strokes, is the recently patented invention of a Chicago shop foreman.

The device is equipped with two cutters, one a roughing tool, and the other a finishing tool. On the forward stroke the finishing tool rides over the work while the roughing tool makes a cut. On the return stroke the operation is reversed.

Finally, when the tool-holder has been fed all the way, the surface of a casting or other work is finished.

DEVELOPMENT of a new system of making iron castings from "long-life molds" has been announced by a carbureter manufacturing company of Detroit, Mich. The new mold, it is reported, will produce six two-pound castings a minute.

Million-Pound Pressure Proves Strength of Knotty Wood

SCIENTIFIC tests recently completed in the laboratories of the United States Forest Service at Madison, Wis., have exploded the theory held by builders that knots in timber necessarily impair seriously its supporting strength. By means of a huge machine that applies a vertical pressure of 1,000,000 pounds and is capable of receiving timbers 30 feet long and 12 inches square, it was demonstrated that knots have virtually no influence on the stiffness of timbers, and so, little effect on the column strength.

This discovery, the laboratory officials say, is of immense importance, since many thousands of dollars now are wasted annually in building operations by discarding knotted timbers or using timbers larger than is needed to support a load.

The results of the recent tests, however, do not mean that knotted timbers are to be deliberately sought, since knotted timbers come from the upper portions of trees, and have less density and elasticity than wood from the lower trunk. In the tests Southern yellow pine was demonstrated to have a column capacity as high as 432,600 pounds.


New Adjustable Drill for Metal or Wood

A NEW adjustable tool for cutting circular holes in sheet metal, wood, or fiber has been perfected by a tool-manufacturing concern in Cincinnati, Ohio. A lead hole is first drilled by a central drill, to which the tool-holding frame is attached. On this frame slide two cutting blades, which can be adjusted to cut holes from one to four inches in diameter and up to seven-eighths inch deep.

The frame of the tool is of malleable iron, while the two cutting blades are of tool steel, ground and tempered. Adjustment is accomplished by means of two knurled thumbscrews. A scale on the metal body aids in obtaining accurate diameter dimensions.


The tool is especially useful for work on automobile dashboards.

THE editor will be glad to supply, wherever possible, the names and addresses of manufacturers of devices mentioned in this issue of POPULAR SCIENCE MONTHLY.

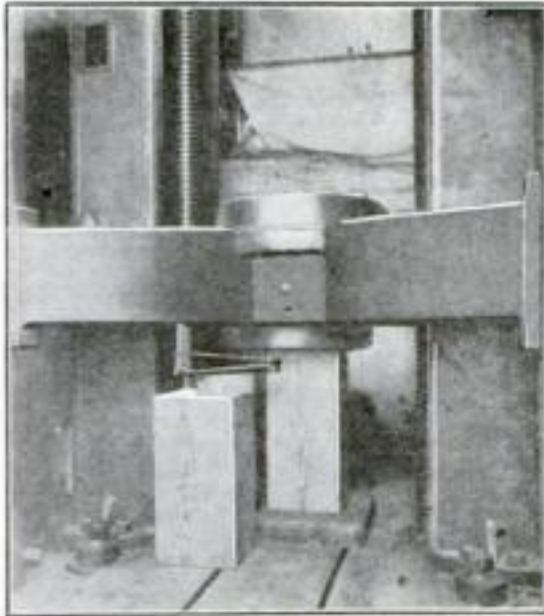

A short column of yellow pine under tremendous pressure in the million-pound test machine

The massive construction of the timber-testing machine, capable of exerting a million pounds pressure, is shown at the right. The machine weighs 150,000 pounds

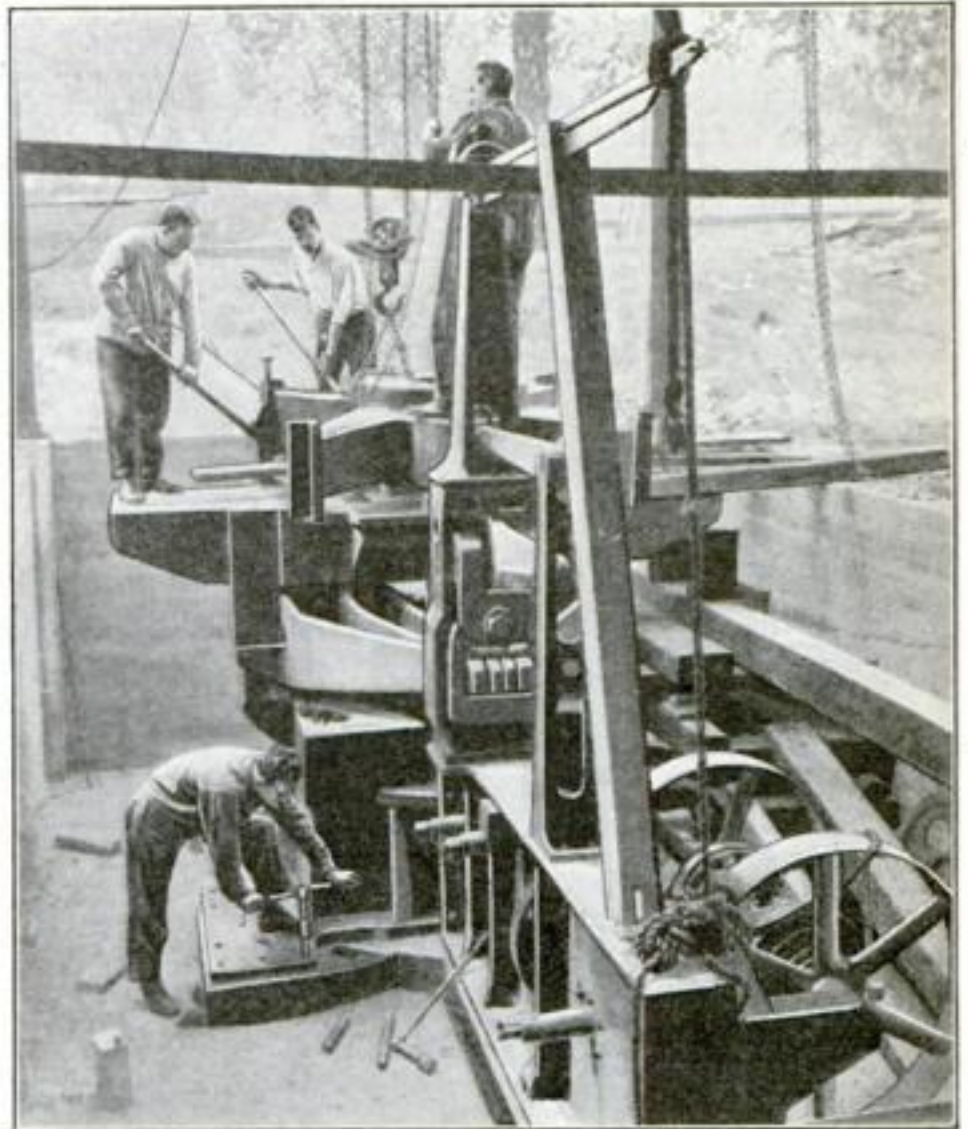


Huge Steam Shovel Is Hill Climber

STEAM shovels of such size that manufacturers never before attempted to mount them on anything but standard railroad trucks recently have been successfully equipped with traction wheels, giving them extreme mobility and the ability to ascend and descend steep slopes easily. The shovels are hauled by the forward wheels, driven by powerful shovel engines, and steered by rear wheels.

In a quarry near Chicago a shovel 85 feet long, with traction-wheel equipment recently descended into and climbed out of a pit 80 feet deep. Such a feat would have been all but impossible for the same machine on tracks. At a Pennsylvania quarry a huge traction wheel shovel was moved in one day a distance that under the old track-laying methods would have occupied at least 10 days. A shovel mounted on traction wheels also was successful in replacing a derailed dump train on the tracks in a few hours in a Michigan quarry.

Engineers say traction wheels for the mounting of large shovels possess many advantages over railroad trucks, including greater mobility, easier accessibility to the face of an excavation, elimination of tracks and consequent lowering of expense.

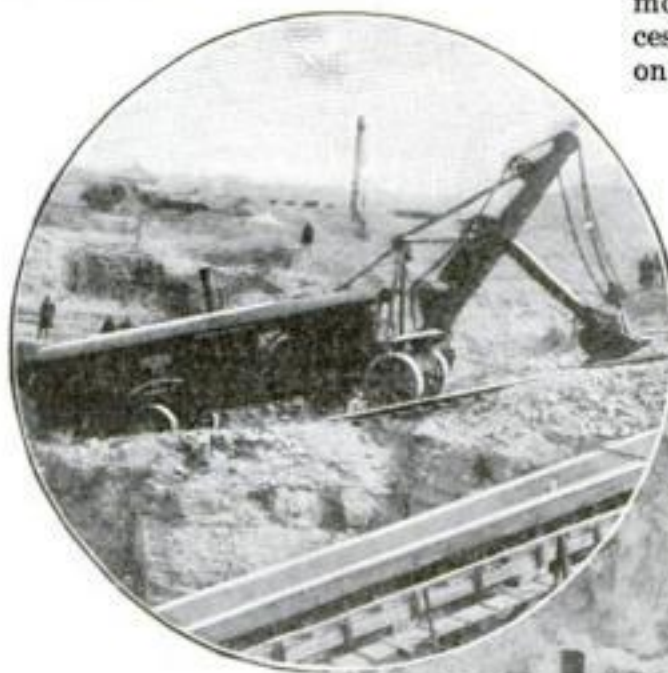

Above: A steam shovel mounted on traction wheels climbing the steep side of an 80-foot pit in a stone quarry at Elmhurst, Ill. At the right: The same shovel at work in the quarry



Relief Springs Smooth Rough Roads


AUXILIARY springs of a distinctly new type that are claimed to give Pullman-car ease on the meanest road, may be attached to most makes of automobile at small cost.

The rear auxiliary relief spring is composed of double transverse, straight

laminated springs. These are secured together at their centers, with a roller-bearing oscillating joint between. Each end of the upper spring is connected with the side frame by a roller-bearing device, and each end of the lower spring is held in contact with the main side springs by a

rubber-padded stirrup with a ball bearing between the springs. This gives a frictionless connection and allows a great range of spring or axle movement. It provides also a three-point suspension for the rear of the frame.

It is said that this arrangement reduces the effect of end thrust movement and sideways and will damp out sharp rebounds.

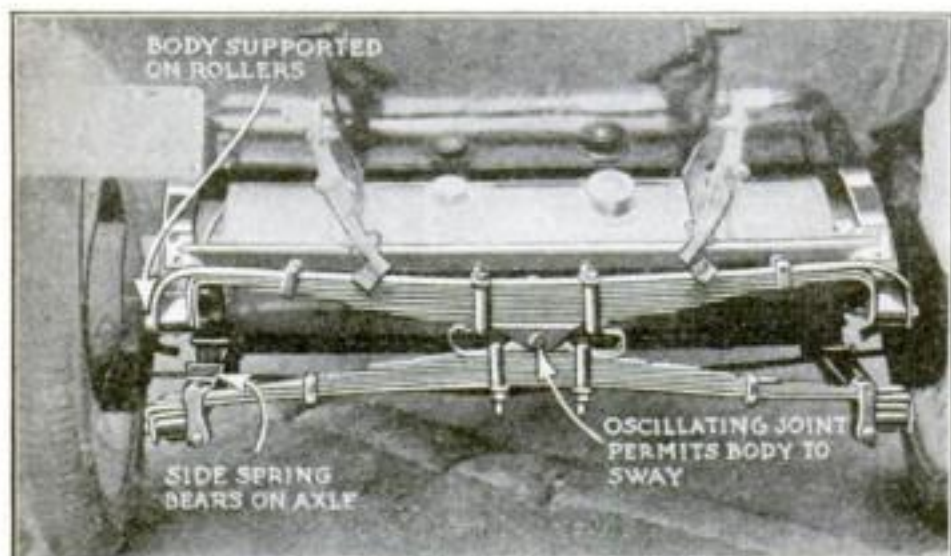

The rear auxiliary relief, showing double transverse springs with roller bearing joint, and roller bearing body support

Views Scenery in Auto Telescope

MOTORISTS who may wish a closer view of attractive bits of landscape, or who have a leaning toward amateur astronomical investigation, will be interested in the homemade automobile telescope that a Vermont man has attached to the windshield of his car. The instrument is mounted on a ball-and-socket bracket, permitting it to be set in any position to observe earth or sky. An eye piece with a half-inch focal length enables observations to be taken without getting into uncomfortable positions and also magnifies the images in the telescope 40 times.

The telescope has a 3 1/2-inch mirror with a focal length of 20 inches.




Daredevil Says Front Seat Is Safer

A NOVEL theory as to the relative safety of the front and rear seats of an automobile is offered by J. H. Van Normann, a circus daredevil of Bridgeport, Conn. He asserts that the rear of the car is more dangerous to ride in than the front, and claims he proves it by the way in which he performs the thrilling stunt shown here.

According to Van Normann, centrifugal force will hurl out the occupants of the rear seats in an accident, just as he is hurled 50 feet into a net by this agency when his bicycle finishes its descent of a long in-

cline and shoots off into space. The photograph shows how the front of the bicycle falls and the rear rises as he performs the spectacular feat.

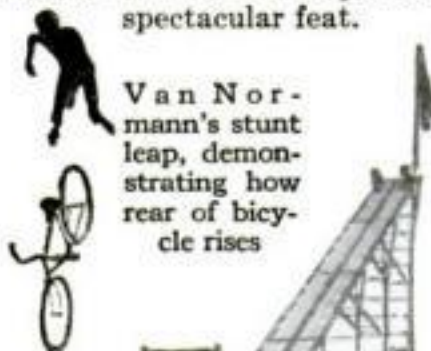


Checking on Trucks

TO KEEP track of the movements of motor trucks or delivery wagons, a Cleveland manufacturer has devised the ingenious dial recorder shown here. It may be attached to the dashboard, beneath the seat or to any other convenient part of the body.

A dial of paper surfaced with wax, on which are marked the 24 hours of the day, divided into 10-minute intervals, is contained within the case and attached to clockwork that causes it to make a complete revolution once in 24 hours.

The case also contains a pendulum that swings from side to side with the sway of the car. To this pendulum is attached a sapphire-pointed stylus that scratches the waxed paper as it moves.

Moving along the edge of the dial, this stylus records when the car was moving or at rest.

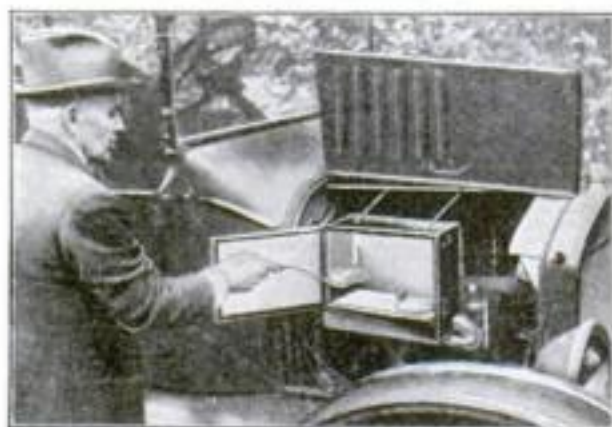

Auto Engine Cooks Meals while You Ride

AN OVEN attachment for automobiles has been perfected by James E. Z. Fowle, of Preuss, Ore. The oven has a compact rectangular casing, shaped so that it will seat snugly over the exhaust manifold of the engine.

The top carries two rods terminating in hooks that engage over the radiator stay rod, thus holding the oven securely. Coffee, stews, and boiled eggs may be prepared while the car is in motion. Hot cakes or fried eggs can be cooked on a hot plate at the bottom of the oven.

How to Enjoy Your Car in Winter

By George A. Luers, M.E.

Noted Auto and Mechanical Engineer

AS I was walking down the steps of my home one morning early last December I saw a neighbor standing at the curb. He was gazing with pained expression at his automobile, a smart car of a well known make, bought only a few months before. As he heard me approach he looked up and pointed silently toward the front of the car.

Water was pouring from the bottom of the radiator in a flood.

Radiator Was Only Half Drained

"Frozen, eh?" I observed, for the night before had brought the first really cold weather of the year.

"No," he denied. "It can't be frozen. I haven't used the car in a week, and I drained the radiator the last time I put the car away. I noticed it was leaking when I started to back out just now. I can't understand it."

I stepped to the front of the machine to examine it. The core—the honey-comb-like center—of the radiator was split where it joined the lower tank and along the fissure was a strip of ice. I puzzled for a full minute before I found a possible explanation; and, when I questioned the car owner, my guess proved to be correct.

Instead of actually draining his radiator in the only way in which it can be done thoroughly—by removing the plug at the bottom of the lower tank—my neighbor had attempted to draw off the water by turning the cock beneath the water pump. This had permitted the water to flow from the upper part of the radiator, but because the cock is on a level with the lower tank, this tank had been left full. The water had frozen when the temperature fell the night before. As a result a new radiator core was necessary before the car could be used again and this meant a heavy repair bill.

Freezing Water Is Common Trouble

My neighbor's experience is a typical instance of the sort of trouble into which ignorance, inexperience, and carelessness often bring motorists during cold weather. Operating an automobile during the winter is a different thing entirely from driving the same car in milder seasons. The automobile has been improved in a thousand ways since the days when every owner put his car up for the winter, but not yet can it accomplish the transition from relatively warm weather to cold unless it is prepared for the change.

Everybody knows that water freezes, yet the most frequent cause of trouble and expense to the winter driver remains the freezing of the water in the cooling systems of cars. The man who lets this happen deserves little sympathy. You know when cold weather may be expected, and you should prepare your car for it in advance.

Before the first cold weather comes drain your radiator at night. Better



Operating an automobile in winter is a different thing entirely from driving the same car in summer. An automobile is like a human being—to weather the transition from warm sunshine to the snow and ice and freezing temperatures of winter it must be prepared for the change.

still, fill it with an alcohol or other non-freezing solution. It is better to pay for a few pints of alcohol which you really do not need than to be forced to pay a bill

for a split radiator, broken pump, or cracked water jacket.

There are many anti-freezing compounds that you may use, but denatured alcohol is as efficient as any and is probably the most easily obtained. A proportion of one-fifth alcohol to four-fifths water will prevent freezing at temperatures above 15 degrees, while a mixture of half alcohol and half water will not freeze above 34 degrees below zero.

Since anti-freeze solution is somewhat expensive, it is well to prevent loss by leakage by inspecting the hose connections, gasket and pump packing and renewing any of these which may require it.

As a further precaution a leather radiator cover is valuable for retaining heat when the engine is idle.

Some Ordinary Winter Precautions


Cold weather also affects lubricating. Oils will congeal in the winter, making the engine and transmission stiff. This requires much additional power from your battery in starting, and tends, of course, to discharge it. Light grades of engine and gear oil should be used in winter unless, of course, the manufacturer of your car expressly advises against this. The lighter oils will remain more fluid than heavy oils in cold weather and consequently will reach bearings and gears more readily.

Tire trouble, too, is frequent in winter. Chips of ice cut the casings; water from melting snow seeps into the cuts, freezes and rapidly destroys the rubber and carcass. You will do well, then, to start the winter with a set of new tires, to make frequent inspections and to repair cuts as they develop. A set of good tire

Preparing Your Car

HERE are important pointers to observe in preparing the body of your car and its accessories to weather the snow and ice and bitter cold of winter:

TOP	Repair breaks and untacked seams.
CURTAINS	Replace broken or discolored glass.
WIND-SHIELD	Fasten bolts, oil hinges and provide a wiper.
DOORS	Adjust lost-motion devices, oil latches and hinges.
BODY	Tighten frame bolts and dash bolts.
FENDERS	Tighten nuts on brackets and braces.
PAINT	Enamel bare spots and use wax polish.

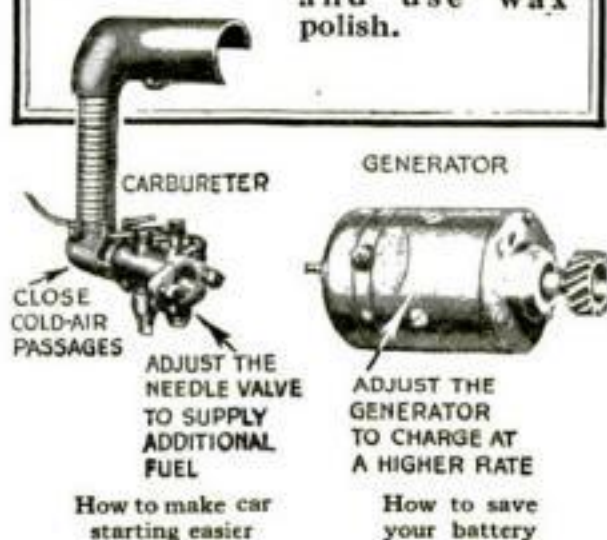

chains for use on icy, snow-covered or sloppy highways is, of course, an essential.

In addition to caring for such details as these, a thorough inspection of the car to detect and correct possible mechanical defects should precede its winter use.

In the winter you need all the power your motor can develop. Be sure there is no loss of power through leaky compression or worn valves. If the motor turns over easily on compression strokes, it is a sign of leaky compression which should be corrected by a new set of piston rings. Then inspect the valves and guides. If they are worn, they should be replaced.

When the Lubricant Congeals

Congeaed lubricant in your transmission case will make the action of your transmission sluggish. To compensate for this, adjust the sliding gears for free movement and increase the tension of the clutch springs.

When the highways are covered with snow or ice, your brakes are under an exceptionally heavy strain. For safety in winter driving, be certain that your brake linings are not worn. If they are, have the brakes relined before you risk driving your car. The brakes should be adjusted loosely for winter driving, so that grit, thrown against them from wet roads, will not wear the linings out too fast.

Sharp turns are dangerous in winter, because of slippery traction. For this reason your steering gear should be adjusted so that the lost motion in the steering wheel will be slight—not more than an inch. The steering gear should not be made so tight, however, that the wheels cannot be swung instantly to counteract the least tendency to skid.

Driving in and out of frozen wheel tracks and over banks of snow subject wheel bearings to heavy strain. Examine the bearings before using your car for the winter and replace bearings that are worn too badly to be adjusted.

The engine and cooling system lose

their heat rapidly in cold air. This loss of heat must be compensated for by adjusting your carbureter for hotter mixture. The needle valve or nozzle should be opened wider to supply the extra fuel needed.

Leakage in the air inlet of the carbureter and failure of the "choke" to close the air inlet properly will give you

On the market are many appliances designed to aid you in starting your car in cold weather—primers, electrical heaters for the carbureter and similar apparatus. One of my acquaintances even carries a thermos bottle filled with hot water, which he pours over the carbureter when he is ready to start his car. Most of these devices really do make starting easier, but, if you have made your car right mechanically before the winter season, you probably will not need them. Flooding the carbureter is an easy way of starting some makes of cars, but is wasteful of gasoline and tends to form carbon.

You can make starting easier for yourself by preparing for it when you stop your motor. Pull your choker rod out and open your throttle the instant you shut off the ignition. This places a heavy charge of fuel in the engine. Since the first movement of the motor adds to this charge when you press your starter pedal, the chances are that the car will start on the first turn.


Special Care Is Needed

Driving and traffic conditions vary so much in different sections of the country that it would be useless for me to attempt to suggest rules of conduct to be observed on the roads during the winter. Especial care is necessary, especially when snow or ice is on the highways, reducing friction between the tires and the road. Your car cannot climb the steep grades that it ascended easily when the roads were dry; there is a tendency to skid when descending hills or making turns.

Watchfulness is necessary both on the roads and in the garage during the winter; but if you will exercise intelligent care, you can drive your car with just as much safety and enjoyment as in summer.

ARE you planning to buy a new car this year? In making your selection don't fail to look over the new improvements in 1924 designs which will be described in next month's issue.

KNOW YOUR CAR

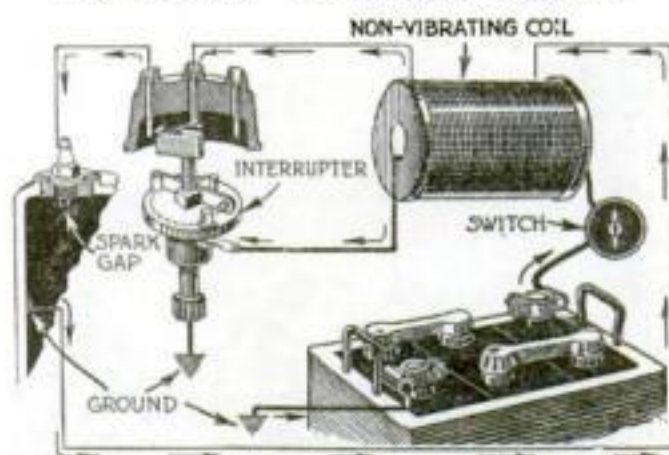


Your Spark Plugs—The sparks that jump across the gap between the points, or terminals, of the spark plug are produced by a high-tension induced current in the manner shown in this diagram of a typical ignition system. Low-voltage current from the battery is led through the ignition switch to an induction coil, which "steps up" the electric voltage from six to more than 5000.


The battery current passes from battery to coil, then to interrupter, through ground and back to the battery. The high-tension current, induced by the coil, passes through the timer, across spark gap, through ground and back to the coil.

trouble in starting your car when the engine is cold. Replace any worn or leaking parts in the air inlet and adjust the choke to close fully.


The difficulty of starting even mechanically perfect cars in winter tends to wear out the battery quickly. The generator can be adjusted to charge the battery at a higher rate. The average motorist probably will do well to have this adjustment made at a good service station. It is probably safe to say that a generator adjustment that will charge the battery at the rate of 20 amperes when driving at 30 miles an hour will be about right for the average car.

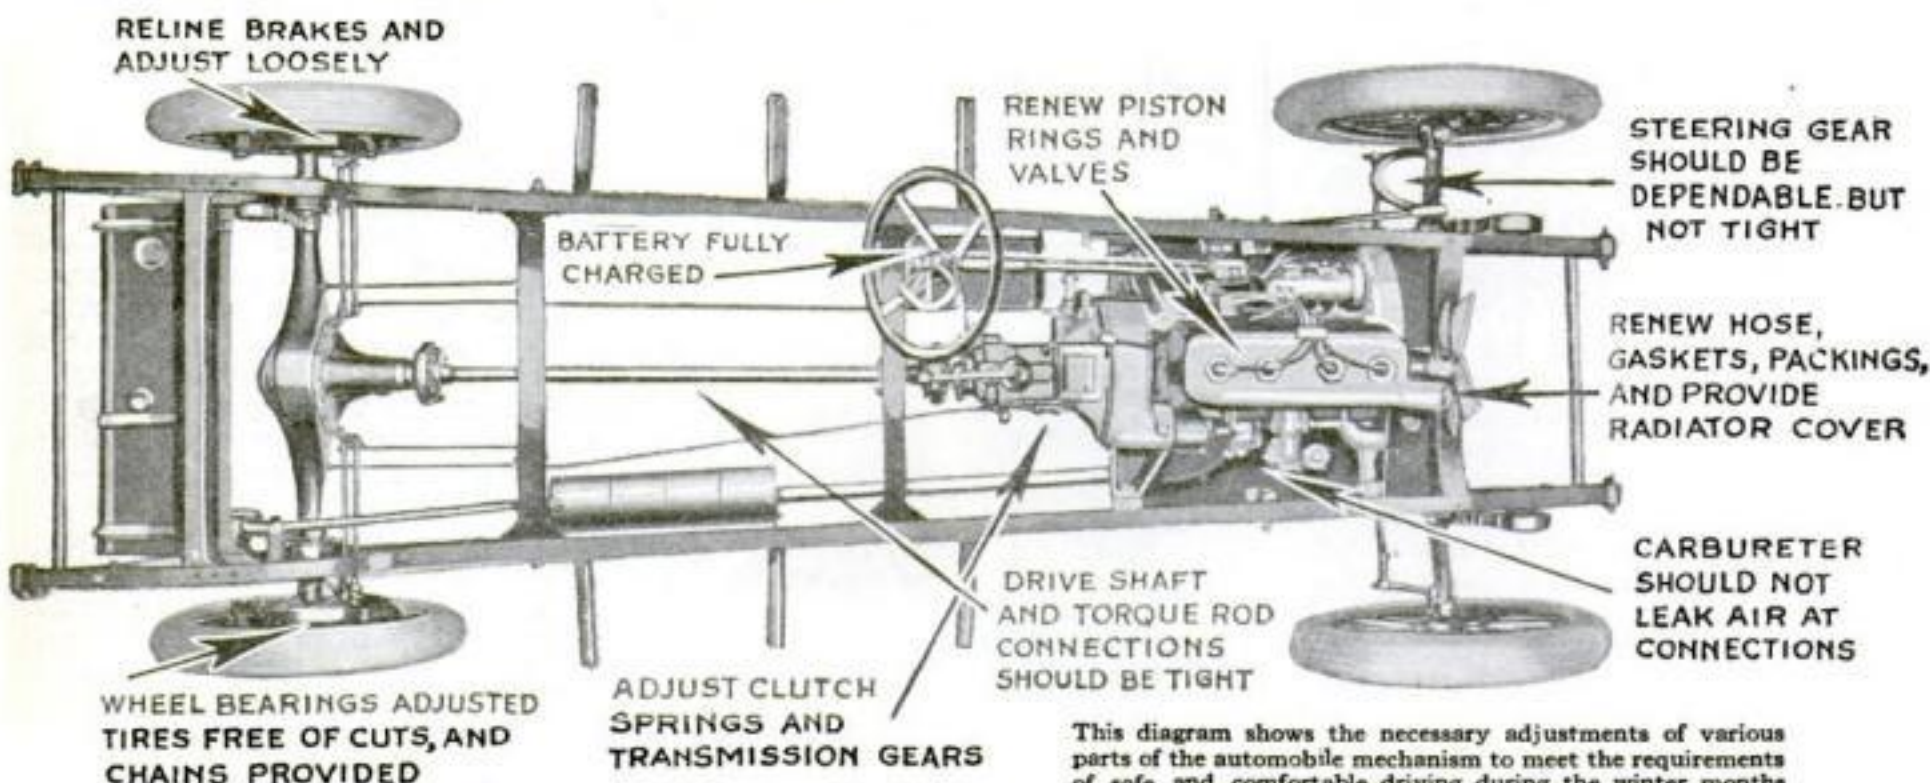

The Newest Aids to Better Motoring

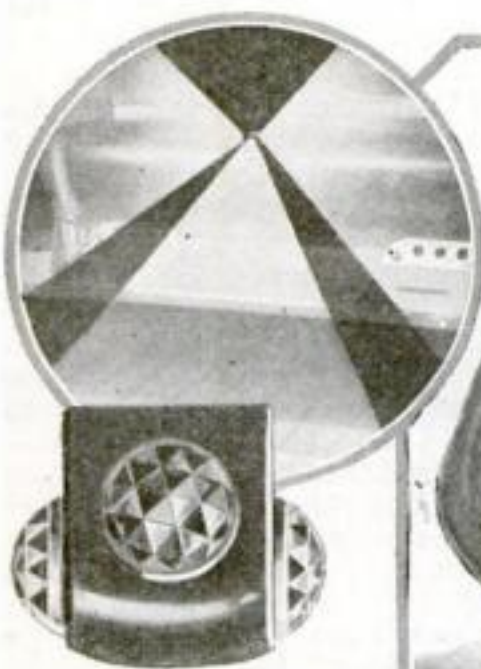

Danger of accident in entering or stepping from a car in the dark is avoided by this three-lens step lamp that illuminates the openings of both doors, the runningboard and ground

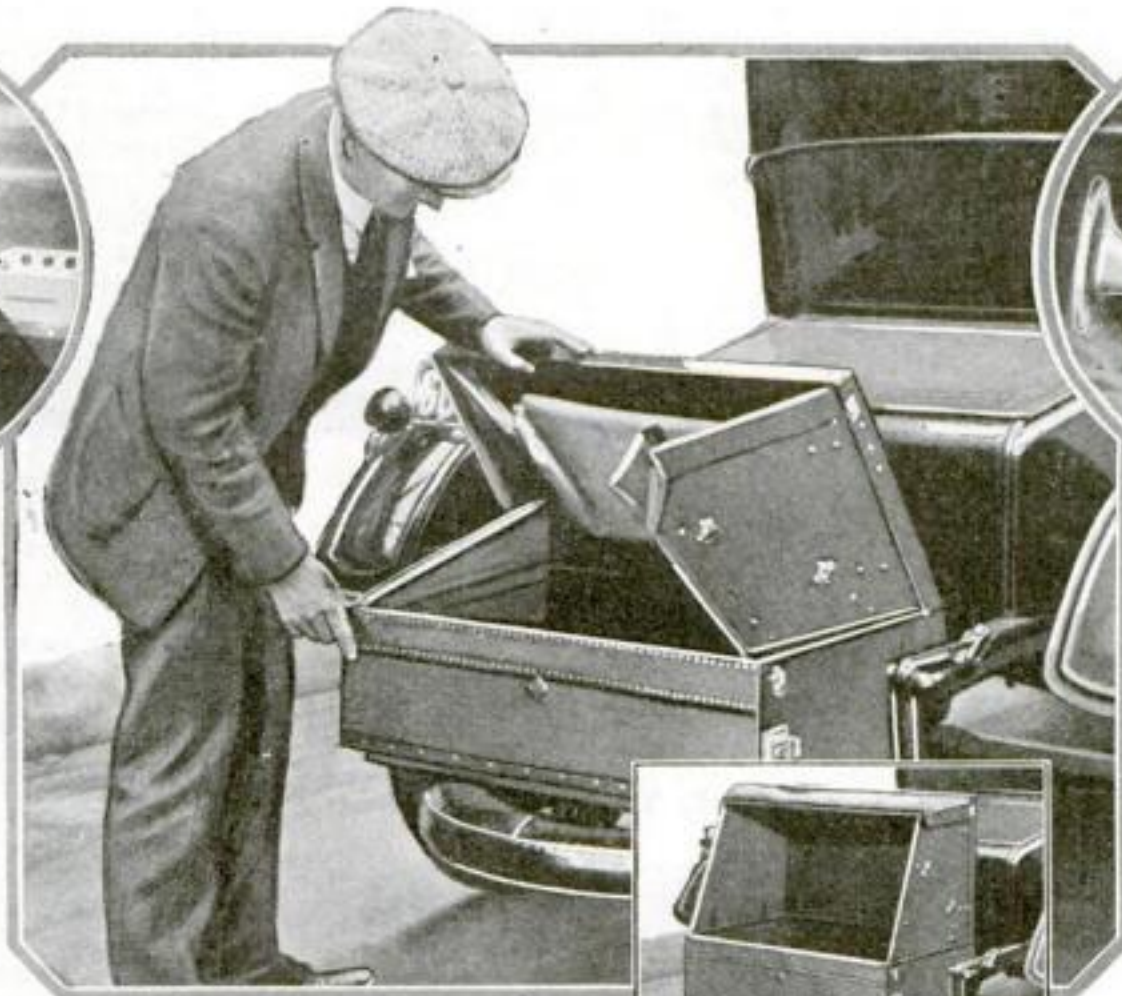

These two photographs show the operation of an ingenious expanding luggage carrier that folds to the size of a suitcase when not in use. The carrier is supported by the spare tire that swings down to a horizontal position on hinges at the rear



Valuable automobile robes or coats can be safeguarded from theft by this clamp lock. An adjustable plunger, locked by a key, causes the contact points to grip the robe like a vise



Heavy loads can be carried behind the car on this combination bumper and luggage rack designed for such uses as carrying milk to market. The rack is built of angle iron



These safety light signals are controlled by a two-way switch on the dashboard. Upper picture shows rear signal; lower, front signal




This tire chain is said to be unusually effective in preventing skidding, and to be very easy on the tires



In this friction shock absorber, steel blades attached to the axle move between leaves of specially treated friction material attached to frame



This extension on the gas lever of a Ford car holds a pushbutton that makes it possible to dim the lights of the car without removing your hand from the wheel. The extension also facilitates control of the gas lever

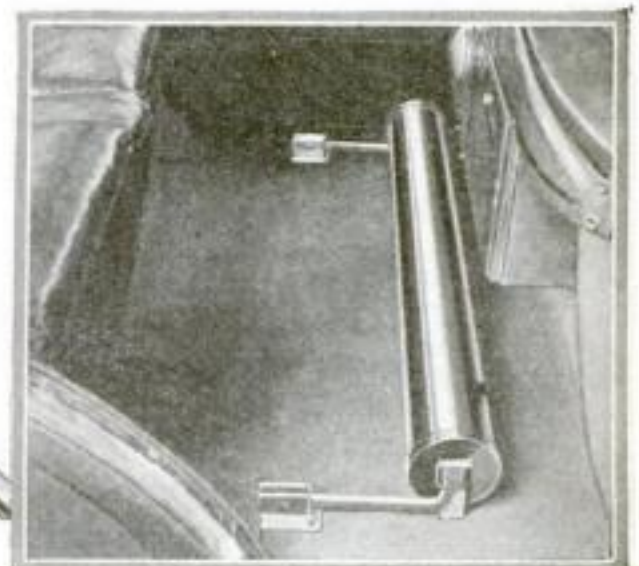

A tubelike footrest serves as a convenient container for the tire chains. The container also may be used as a gasoline or water container

Labor-Saving Kinks for the Autoist

BY THE relatively simple modification illustrated in Fig. 1, an auto steering wheel of the usual fixed type can be converted into a hinged or tilting wheel. This applies, however, only to a car on which the spark and gas quadrants are not mounted on the wheel. It is particularly useful in converting an old car into a sport model. The wheel spindle is cut off and slotted to form a hinge joint and an extension fastened on, as shown. This extension is threaded for a large wingnut. A key prevents the wheel from slipping.

TWO nails and a block of wood are used to make the simple tester for spark

plugs shown at Fig. 2. A hole is bored near the end of the block, as indicated, and the nails are driven in at an angle so that the points will be about $\frac{1}{8}$ in. apart. In use, one nail is touched against the terminal nut on the spark plug, while the other is placed against the metal base of the plug. —F. M. P.



Fig. 2. Spark tester




Fig. 5. Battery box



Fig. 7. Cheaply made radiator filler

sary to support the workman's head and shoulders. The materials used in construction are short lengths of narrow pine flooring, a pair of 4-in. strap hinges, four ball-bearing casters, and a 5/16-in. nail rod about 40 in. long.—R. A. FRANKLIN.

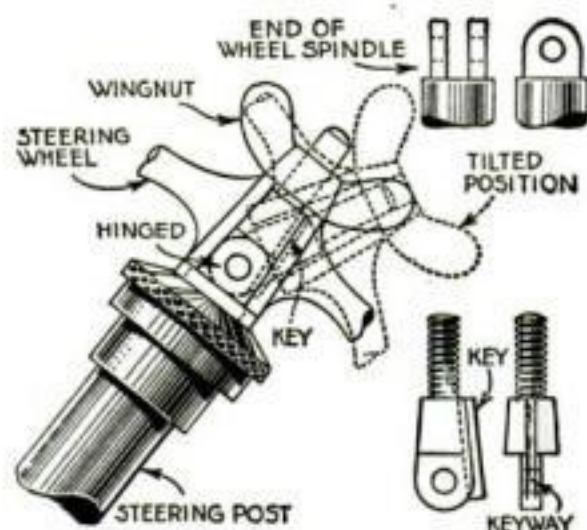


Fig. 1. Tilting steering wheel



Fig. 4. An adjustable rest for the head and shoulders makes this garage creeper unusually comfortable for work under car



Fig. 9. Spring spreader

IN REMODELING an old style auto it is sometimes a puzzle to know where to carry the storage battery. One way is to fasten one of the many commercial battery boxes to the runningboard. Another is to place the battery under the back seat, if space allows. Perhaps the best idea is to arrange suitable brackets under the floorboards.

To fit the angle-iron supports properly to the car frame, the work should be done, if possible, at a time when the body of the car has been removed. Once the iron

cross pieces are in place, as shown in Fig. 5, they cannot work loose. Note that they are bolted or riveted to the top flange of the frame. This is so that the drive-shaft tube will clear them better, but if there seems no danger of the tube's striking the irons, perhaps they can be bolted to the lower frame flange, which makes it unnecessary to remove the body.

AN IMPROVEMENT upon the hammer or punch method of cutting bolt holes in gaskets is to use a tool made by welding a $\frac{1}{2}$ -in. ball bearing to a length of $\frac{1}{4}$ or $\frac{1}{8}$ -in. rod (Fig. 6). When the gasket has been put in place, the ball is laid on each hole in succession and struck sharply.

One blow cuts a clean hole. —B. S. R.




Fig. 3. Drum brackets

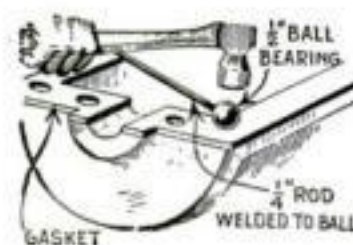


Fig. 6. Gasket punch

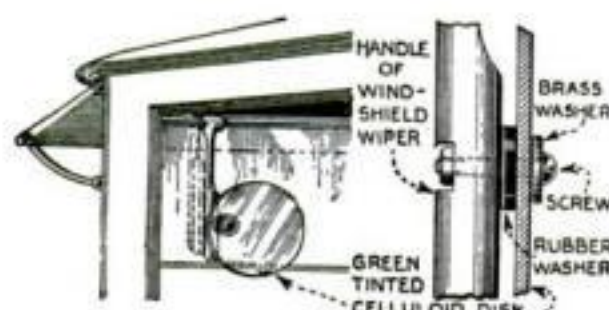


Fig. 8. Glare deflector

of the bucket and holds the hose up when the pail is being filled or carried.—J. L.

ONE motorist uses a simple glare deflector made as shown in Fig. 8. The deflector is a green celluloid disk fastened with a small screw and washers on the inside arm of the windshield wiper. Since the wiper is arranged to move across the windshield, and the glare disk can be swung around in a circle, it is possible to place the deflector quickly in any position desired.—J. N. T.

IN ANY garage where Ford cars are overhauled, the spring spreader shown in Fig. 9 will be found to save much time when removing or placing the spring shackle bolts. Two bars, one with a U-bend, are connected with a turnbuckle and the ends are pointed to fit back of the spring eyes.—L. B. C.

A large filling bung is drilled, tapped, and fitted with the usual metal spigot, and, once made, this special cap is kept for each new barrel of fuel. To pour the gasoline, the drum is turned over until the spigot is in a convenient position, and afterward is rolled back with the spigot at the top, so that there will be no leakage.

Lubricating oil drums can be handled in the same way.—A. C. T.

THE homemade creeper illustrated in Fig. 4 is unusually comfortable because the upper two fifths of its bed is hinged so that it can be raised when neces-



The Home Workshop

Arthur Wakeling, Editor

Making Toys to Delight the Kiddies

MAKING toys for the kiddies' Christmas is the most enjoyable work that comes into the home workshop. Every man who is in the least handy with tools likes to build playthings. It is fun to put them together; they always seem to turn out successfully; and they are immensely appreciated by the children.

This is especially true when the toys are so interesting, sturdy, and easily constructed as those illustrated—a toy tea cart and game table, a miniature garage, and a bunny wheelbarrow. These were designed especially for POPULAR SCIENCE MONTHLY, and the working details, prepared by George F. Kaercher, are given in full in Home Workshop Blueprint No. 29.

Although essentially a girl's toy, the tea cart can be used by the entire family as a portable game table. On the tray—either on the face or on the back, as preferred—is painted a checkerboard. The table can be used also for many other games, and its chief advantage is that it can be wheeled about from room to room or carried up and down stairs.

The tea wagon can be made of white-wood, pine, cypress, or any other wood that is easily worked. It is 18 in. wide,



13½ by 12½ in. The two runners are ¾ by 1 by 19⅞ in., and the two guides, ½ by ¼ by 14 in. The two drawer rails are ¾ by 2 by 13 in. The table leaf braces are cut from pieces ⅝ by 4¾ by 6½ in. and are hinged to the side rails.


The wheels are cut from pieces ¾ by 10 by 10 in. They can be lightened by a cut-out design, as shown, or they can be left solid. Baby carriage or toy express wagon wheels, or any other kind of small wheels can be used, if at hand. The front axle is 1½ by 1½ by 19 in. The small back wheels are cut from pieces ¾ by 2½ by 2½ in., and turn on wooden pins 1¼ in. long and ¾ in. in diameter.

The two handle brackets are cut from one piece ¾ by 6 by 9 in. A ⅝-in. dowel 15½ in. long is used for the handle bar.

The tray bottom is ⅝ by 16¾ by 21½ in. with sides ½ by 1¾ in. mitered round.

Two washers for the front wheels, one drawer knob, two drawer stops ½ by ½ by 1 in., two tray handles 9/16 by ⅝ by 3½ in., rubber or felt tray feet, screws, nails, and brads are also needed.


Mortise and tenon and doweled construction is preferable because of its strength, but the parts can be nailed or screwed together with much less work. Small angle irons, mending plates and box corners can be used to advantage in strengthening toy furniture of this type,

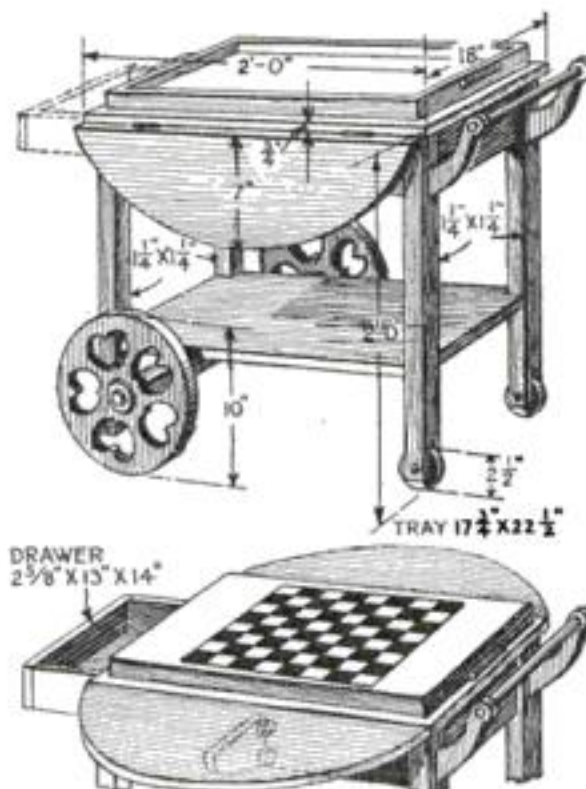

Although a girl's toy, this tea cart can be used by the whole family for games

made of two pieces ¾ by 2¼ by 22½ in., and two pieces ¾ by 2¼ by 16½ in. The lower shelf is ¾ by 15¾ by 21¾ in., but it is just as well to use 1⅝-in. stock, if it is at hand. The heavy shelf reinforces the construction, and it is essential in building toys always to make the parts as strong as possible.

The top side rails are ¾ by 3½ by 20½ in., and one end rail is ¾ by 2⅝ by 13 in. The drawer front is the same size as the end rail. The sides of the drawer are ½ by 2⅝ by 14 in., the back ½ by 1¾ by 12½ in., and the bottom ¼ by

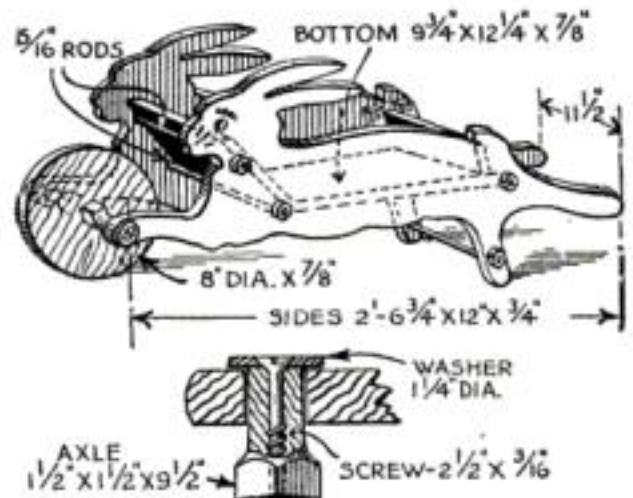


The bunny wheelbarrow makes a certain hit with the younger children

when the joints are merely nailed or screwed together.

The simplest method of finishing the tea wagon is to give it one or two coats of enamel undercoating, or flat white paint, and one or more coats of enamel. It is advisable to use only the best materials in

(Turn to page 107)

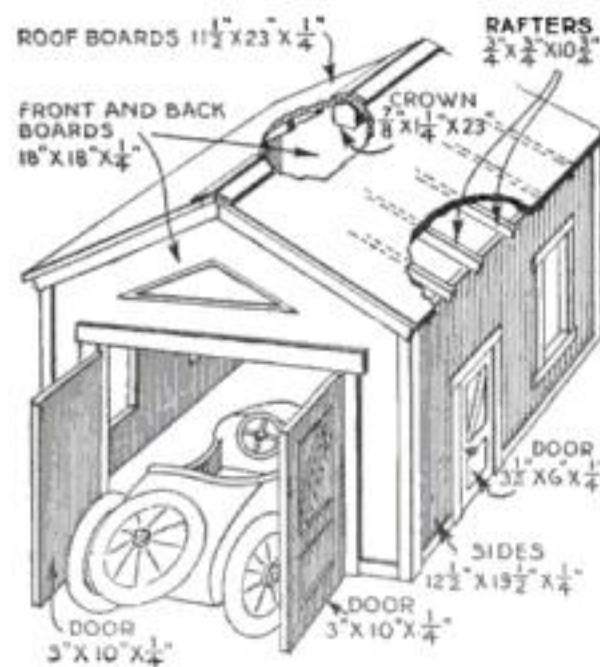

This large toy garage is built of wooden strips covered with wallboard

2 ft. long, and stands 2 ft. high. The table top is ¾ by 18 by 24 in.; and the drop leaves are cut from pieces ¾ by 7 by 24 in. The back posts are 1¼ by 1¼ by 21½ in., and the front posts are the same stock, but only 17 in. long.

The main top rests on a mitered frame

How to Make a Radio Set for Christmas

By Joseph Calcaterra

Of POPULAR SCIENCE MONTHLY'S
Radio Staff

NOTHING could be more in keeping with the Christmas spirit this year than the presentation to the household of a good, reliable radio set. The joy that such a gift will bring to every one in the family is certain to be lasting. The radio set offers a solution to the question, "How can we make evenings at home enjoyable enough to compete with the club and the movies?"

For ease of construction, simplicity of operation, and general all-around efficiency the double-rotor type of tuning unit has few rivals. Why it has not enjoyed greater popularity is hard to understand. A tuner of this type is the heart of the two-stage receiving set illustrated. A rear view of the unit is shown in the photograph of the back of the set; the front view is illustrated in connection with Jack Binns' article on page 59.

Two rotors, one at each end of the stator tube, are used. The secondary coil of the circuit is wound on one rotor while the tickler coil, used to provide regeneration, is wound on the other rotor.

Taking into consideration the selective features of double circuit tuning, combined with the great signal strength obtained by regeneration, the receiver described this month is one of the most compact and efficient it is possible to construct.

The circuit provides for three coils, a primary, a secondary, and a tickler coil, placed in inductive relation with each other. The primary coil consists of 63 turns tapped at every seven turns, with a 23-plate condenser placed across the coil to provide closer tuning. The coil is made of No. 20 s.c.c. wire wound on a tube 4 in. in diameter and 4½ in. long.

A Condenser Tunes the Secondary


The secondary and tickler coils are fixed inductances consisting of 50 turns of No. 24 s.c.c. wire wound on 3½-in. rotors. A 23-plate condenser, placed across the secondary coil, is used to tune the secondary circuit.

It is not necessary to adhere strictly to the dimensions given if the tubes, rotors, and wire mentioned are not obtainable. The stator can be of any convenient size from 3 to 4 in. in diameter and of a length ½ in. greater than the diameter of the rotors that are to be used. The diameter of the rotors can be from ½ to 1 in. less than the outside diameter of the stator tube. The wire used can vary from No. 20 to No. 26 single or double cotton covered and the number of turns used on the rotors can vary from 30 to 50.

In the illustration, A and B are the aerial and ground posts respectively. C and R are 23-plate Vernier variable

CHRISTMAS is the high-water mark of the broadcasting season. Operas, concerts, plays, vaudeville turns, dance music, lectures, sports—every imaginable form of entertainment is then "in the air." You can enjoy it all if you assemble this exceptionally fine two-stage tickler coil feedback receiver designed by Mr. Calcaterra as the ideal Christmas set.

Front and rear views of the set. To avoid confusion, the photographs were taken before the bus-bar wiring was added. Note the symmetrical panel and the double rotor tuning unit.

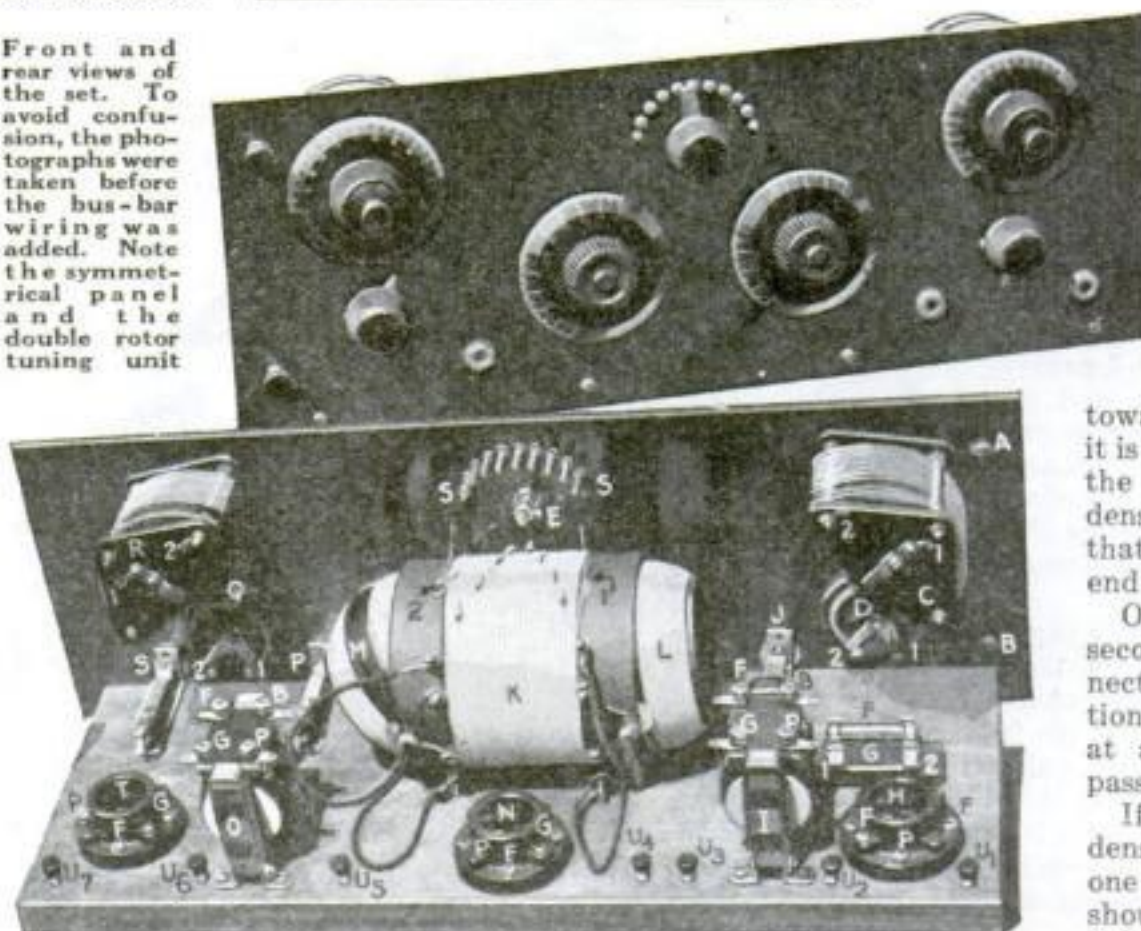

condensers. D and Q are rheostats, being of 30 ohms resistance for the new 3-volt, .06 ampere tubes or of 6 ohms resistance for any of the other standard tubes.

E is a standard inductance switch provided with nine switch contacts. Switch stops marked S are provided at each end of the contacts to prevent the switch arm from slipping off the outside contacts.

F is a grid leak of 1 or 2 megohms, and G, a grid condenser of .00025 mfd. H, N, and T are tube sockets. The G terminal of the H socket, one of the F terminals of the N socket, and one of the F terminals of the T socket are hidden from view.

I and O are standard audio frequency transformers. I may be a high ratio transformer, but O should be a low ratio one. J and P are double-circuit jacks, while S is a single-circuit jack.

K is the primary winding; L the tickler winding, and M the secondary winding.

U₁, U₂, U₃, U₄, U₅, U₆, and U₇ are binding posts used for battery connections.

The general location of the instruments on the panel and baseboard is clearly shown on the photographs. The size of the panel is 18 by 7 by 3/16 in. The baseboard is 17 by 6½ by 1/8 in. The thickness of the baseboard is not important.

No difficulty in making the proper connections will be experienced if the direc-

tions given below are followed carefully:

A single wire is used to connect the beginning, No. 1, of the primary winding K with the No. 2 or stationary plate terminal of condenser C and the aerial post A. Another wire is used to connect the ground post B with the No. 1 or rotary plate terminal of condenser C. The No. 1 terminal of the condenser is then connected with arm E of the inductance switch by a flexible wire connection.

Now connect each tap of the primary winding K, beginning at the first tap from the beginning or No. 1 end of the winding with its respective switch contact. The end of the winding, marked No. 2, is used as a tap and connected with the last switch point of the inductance switch.

Connect the No. 1 terminal of grid condenser G with the G terminal of socket H. Then connect one end of a wire with the No. 2 terminal of the grid condenser; lead the wire straight up

toward the top of the set until it is at a height on a line with the No. 2 terminal of condenser R; and bend it toward that terminal and fasten the end of the wire to the terminal.

One of the leads of the secondary coil M is then connected with the wire mentioned in the last paragraph at a point where the wire passes over the rotor shaft.

If a combination grid condenser and leak is not used, one terminal of the grid leak should be connected with one terminal of the grid condenser

and the other terminal of the grid leak connected with the other terminal of the grid condenser.

Next connect one of the leads of the tickler rotor winding L with the top spring of jack J and the other lead from the same winding to the P terminal of socket H.

Wiring the Filament Terminals

Run a wire connecting one F terminal of each socket with binding post U₂. The wire can be run along the back edge of the baseboard, but make sure that it cannot make contact with any of the other binding posts. If bus-bar wire is used, it should be covered with spaghetti tubing.


The other lead from rotor winding M can now be connected with the wire mentioned in the last paragraph, the connecting wire being run directly back to the wire connecting the F terminals of the sockets or to the F terminal of socket N, to which the wire mentioned in the preceding paragraph is connected.

A wire is then used to connect the No. 1 terminal of condenser R with the F terminal of socket T to which the wire connecting one of the F terminals of each socket with binding post U₂ is connected. An insulated wire, bared only at the

(Turn to page 126)

How You Can Give a Beautiful Finish To

Wood-Craft Presents

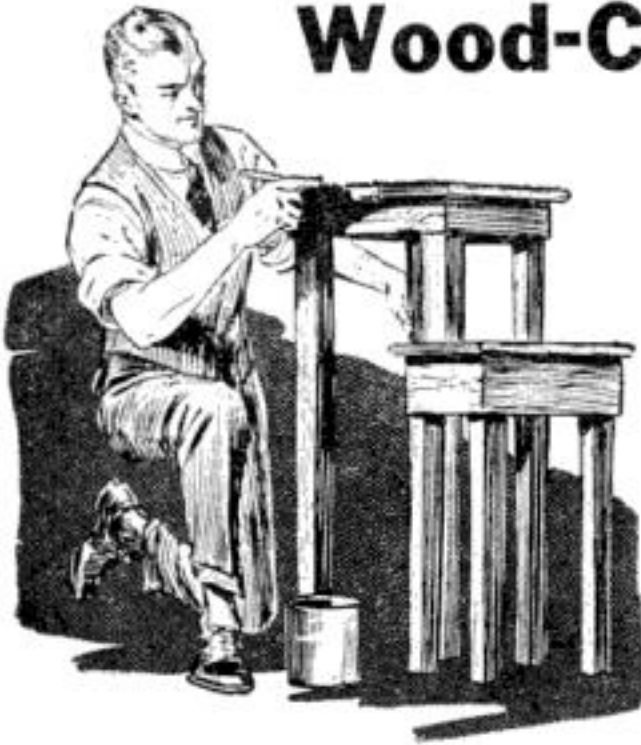

Johnson's Wood Dye is very easy to apply—it goes on easily and quickly, without a lap or a streak. It penetrates deeply, bringing out the beauty of the grain without raising it—dries in 4 hours and does not rub off or smudge.

JOHNSON'S WOOD DYE

Small odd pieces of modern furniture make welcome Christmas presents for the home. You yourself can easily make them for your family. There is no particular trick to constructing porch swings, tables, telephone sets, etc.

Furniture, woodwork and floors of your home can be made to harmonize if a little taste is used in finishing them. You can easily refinish dingy, shabby, scratched wood. Our method involves practically no expense.

Johnson's Wood Dye is made in fourteen beautiful shades, all of which may be easily lightened or darkened—full directions on every label.



In Wood Finishes you get just what you pay for. If you buy cheap brands you may be sure they are manufactured from cheap raw materials, cheap labor and the completed job will be a disappointment and the finish will not stand up.

The Johnson Line of Artistic Wood Finishes is complete—it includes Johnson's Wood Dye—Paste Wood Filler—Enamel and Undercoat—Permacote Wall Finish—Floor and Sani-Spar Varnish—Prepared Wax—and everything necessary for your furniture, floors and trim.

If you are building or remodeling you should have our book on refinishing. The finish of your floors and interior trim is a matter of great importance, for a beautiful piece of hard wood may be absolutely ruined with the



improper finish, whereas an ordinary piece of wood is a pleasure to the eye if well finished.

FREE-This Book on Home Beautifying

This Book tells how to finish wood in artistic stained and enameled effects. Gives practical suggestions on making your home artistic, cheery and inviting. Tells just what materials to use and how to apply them. Includes color card—gives covering capacities, etc. Use coupon below.



S. C. JOHNSON & SON, Dept. PS 12
RACINE, WIS. (Canadian Factory—Brantford)


Please send me free and postpaid your Instruction Book on Home Beautifying and Wood Finishing.

The best dealer in paints here is.....

MY NAME.....

MY ADDRESS.....

CITY & STATE.....

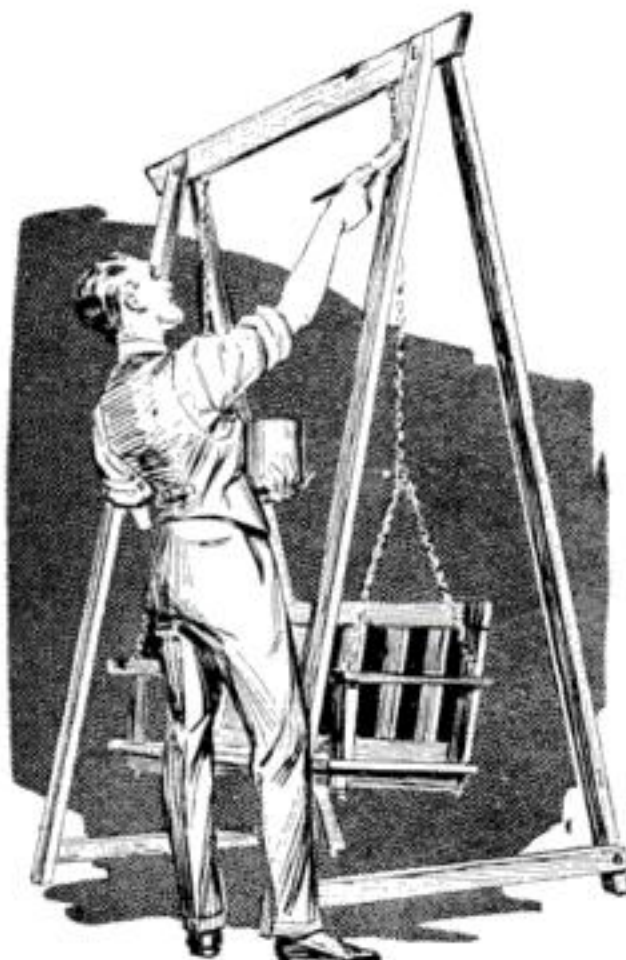

All you need is a little time—a brush — and **JOHNSON'S WOOD DYE.**

Better Shop Methods

How Expert Mechanics Save Time and Labor



Short Cuts in Laying Out Machine Work

By Joe V. Romig
Tool Designer and Builder

MANY short cuts are possible in laying or lining out work in the machine shop. Presumably the regular layer-out and the shop foreman know most of them, but the machine hand or floor hand, no matter how much experience he has had in his particular specialty, often runs into all sorts of difficulties when he is called upon to lay out work.

It goes without saying that any mechanic who attempts lining out for other workmen must be familiar with the use of machine tools in general and have been "through the mill" sufficiently to know just what operations are necessary and their proper order to complete the work in hand.

The main problems in laying out are these: To mark and check the work accurately and speedily, and to do it in such a way that the machinists will be able to follow through the various steps without themselves having to check and measure for obscure markings, uncertain checking points, and unindicated fly lines.

The layer-out can, indeed, do much to simplify the work of the machinist. First of all, the lines and punch marks should be easily distinguishable. On rough work this can be accomplished by coating the metal with a whitewash composed of equal parts of lime and powdered chalk mixed with water to a thin paste and spread over the work with a soft bristle brush.

On extremely accurate and highly polished tool work, it is more desirable to give the surfaces a coating of copper.





Fig. 2. Diagram illustrating layout of flanged casting

This is done by applying a solution of blue vitriol and distilled water, care being taken first to remove all grease and dirt. The copper is easily removed after the completion of the work by rubbing the surface with fine emery paper or cloth.

For laying out, the machinist should become accustomed to having a particular set of tools available at his bench so that he will not have to search through his tool chest after he has started. There should be light and medium weight hammers, dividers from 4 to 12 in., micrometers, trammel sets suitable for both small and

large diameter work, with suitable divider and caliper feet and also a set of ball feet for work with holes in the center, and a surface gage. Then, too, he should have at hand an accurate tape line, several scales of different lengths, scribes, prick punches, squares, and a bevel protractor,

Fig. 1. Laying out the horizontal lines. The piece is then turned for marking the vertical lines

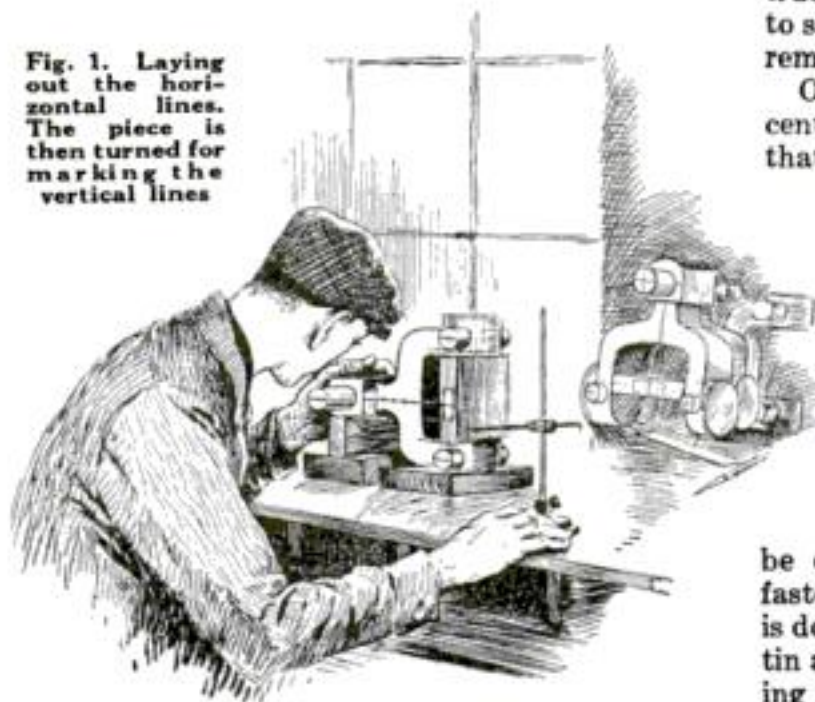

as well as a center head and other tools.

In all laying out, the surface plate plays a most important part. On it the work must be blocked up perfectly true and level.

A careful study of the blueprints must be made and the rough dimensions of the work checked to see that no great discrepancy exists. If any part of the casting or forging is scant of metal, the lining out must be very true to save the stock. Often when the casting or forging is faulty on one side, the lining out should be such as to take off as much metal on the faulty side as possible.

Surfacing Cut Sometimes Necessary

In iron castings, where there is plenty of stock for finishing but the metal appears to have air holes, it is well to have a surfacing cut made first to show how deep the defects are.

Since the starting points in laying out a piece of work are the under side of flanges, the outside of bodies, and other surfaces that are not to be machined, these should be checked carefully and all differences should be divided so as to make uniform the thickness of flanges and other parts. Thus in Fig. 2 the dimension A is first checked and established so that the flanges at the extremities of B will be equal.

Then comes the determination of all center lines. The master horizontal center line is scribed all around the work with a gage. If there are a number of

bosses, lugs or flat surfaces to be worked to accurate distances from the master center line, their distances are scribed horizontally before turning the work, as in Fig. 1.

The work is next turned so that the master center line runs vertically to the surface plate. The work is blocked up true as before and a line is scribed across to serve as a reference line from which the remaining lines can be located.

On all lines marked out make light center punch marks at short intervals so that if the lines are rubbed out, the punch marks will serve instead. Center punches, it might be added, should be long and slender at the pointed end so that they will not obstruct the view of the lines that are being punched.

When a hollow casting is to be machined, it is customary to insert a wooden plug and scribe arcs on it from the edges to mark the center. A clearer intersection can be obtained if a square piece of tin is fastened to the plug at the center. This is done by bending over two corners of the tin at right angles to the surface and driving these points into the soft wood. The arcs on the tin will be more clearly defined than on wood.

From the center thus established it is possible to run a fly line; in fact, any experienced shop foreman will insist that all machine workers run a fly line on every piece they have to turn. This facilitates the progress of the work after it leaves their hands. It requires but a minute extra when the work is still in the lathe, but saves much time later, as well as insuring greater accuracy. When in the lathe the line A is cut with a fine pointed tool as shown in Fig. 3.

Referring to Fig. 2, the distance E is projected from the previously established

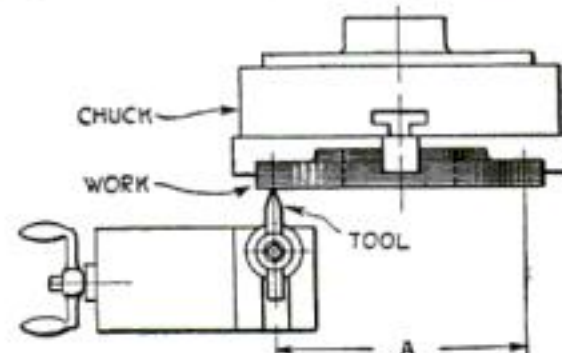


Fig. 3. Running a fly line on a circular piece of work in the lathe with a fine pointed tool

center line. Then the distances D are laid out, giving the center line of the side flange. Such dimensions as C, the thickness of the single flange, are neglected entirely when both surfaces of the flange do not require machining. While the piece above described is a simple one, it serves

(Turn to page 84)

Choose your "mike" CAREFULLY

IF there's one tool in your kit that should be right in every detail it's the Micrometer.

Get a Starrett and you can't go wrong. Here are some of the features that help to explain the preference of two generations of machinists for these fine Micrometers.

EASILY READ—notice the large Barrel and the clear-cut distinct graduations.

SLEEVE ADJUSTMENT—a recognized triumph in tool design. Easier and more exact than the usual anvil adjustment.

IMPROVED RATCHET STOP—a wonderful aid to accurate gaging.

PERFECTED LOCKING DEVICE—a slight turn of the nut locks the spindle firmly.


Starrett design, workmanship and finish assure you of a Micrometer that is not easily sprung, is simple to adjust, and is good for years and years of reliably accurate service. You can't go wrong on a Starrett.

THE L. S. STARRETT CO.

The World's Greatest Toolmakers—Manufacturers of Hacksaws Unexcelled
ATHOL, MASS.


USE STARRETT MICROMETERS

The Starrett Catalog will help you select the Micrometer best suited to your requirements. Mailed free—ask for No. 22 "W"

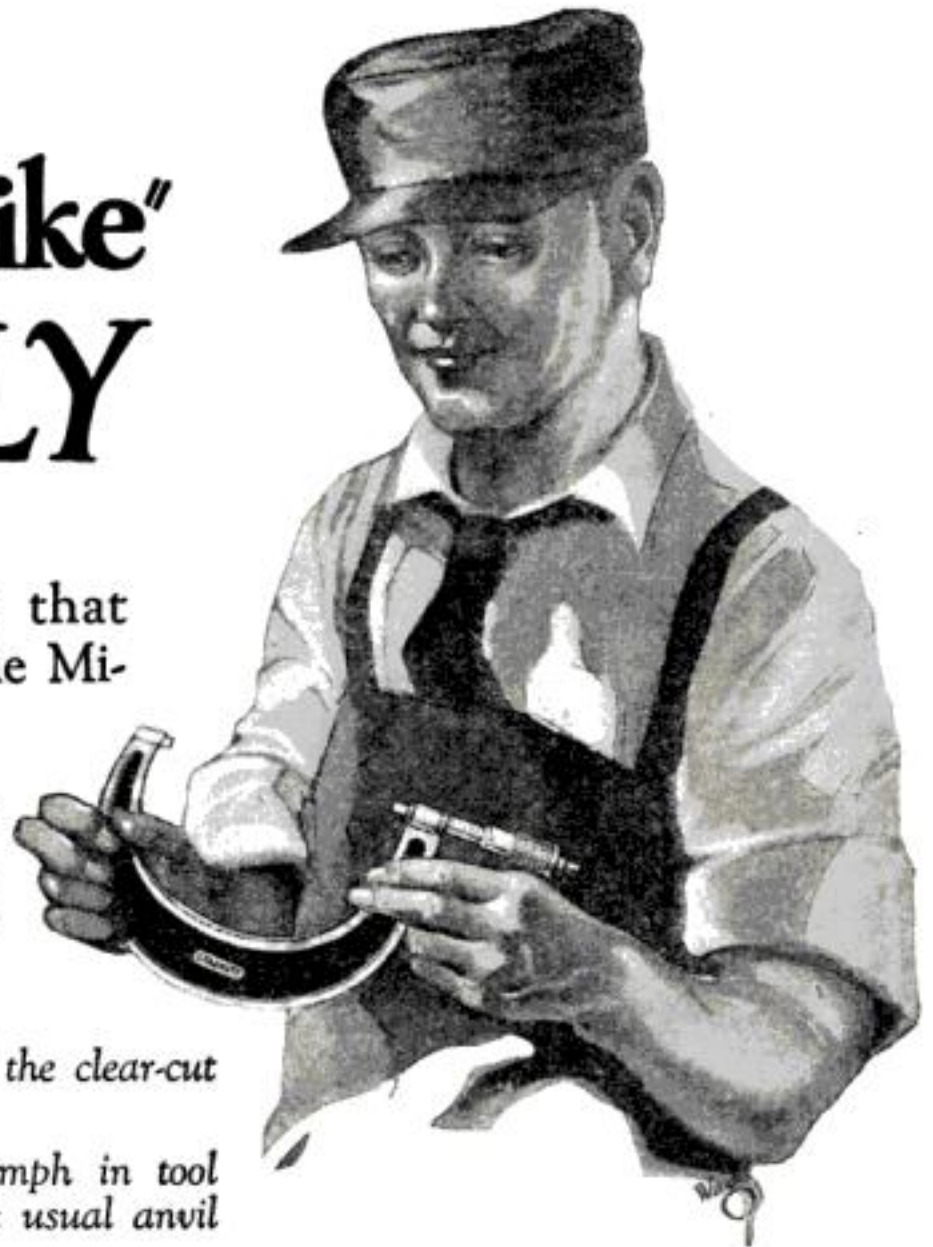

STARRETT MICROMETER No. 226

These calipers meet the demand for accurate gages at a low price. Supplied singly or in sets (combinations from 1 to 6 inches) as desired.

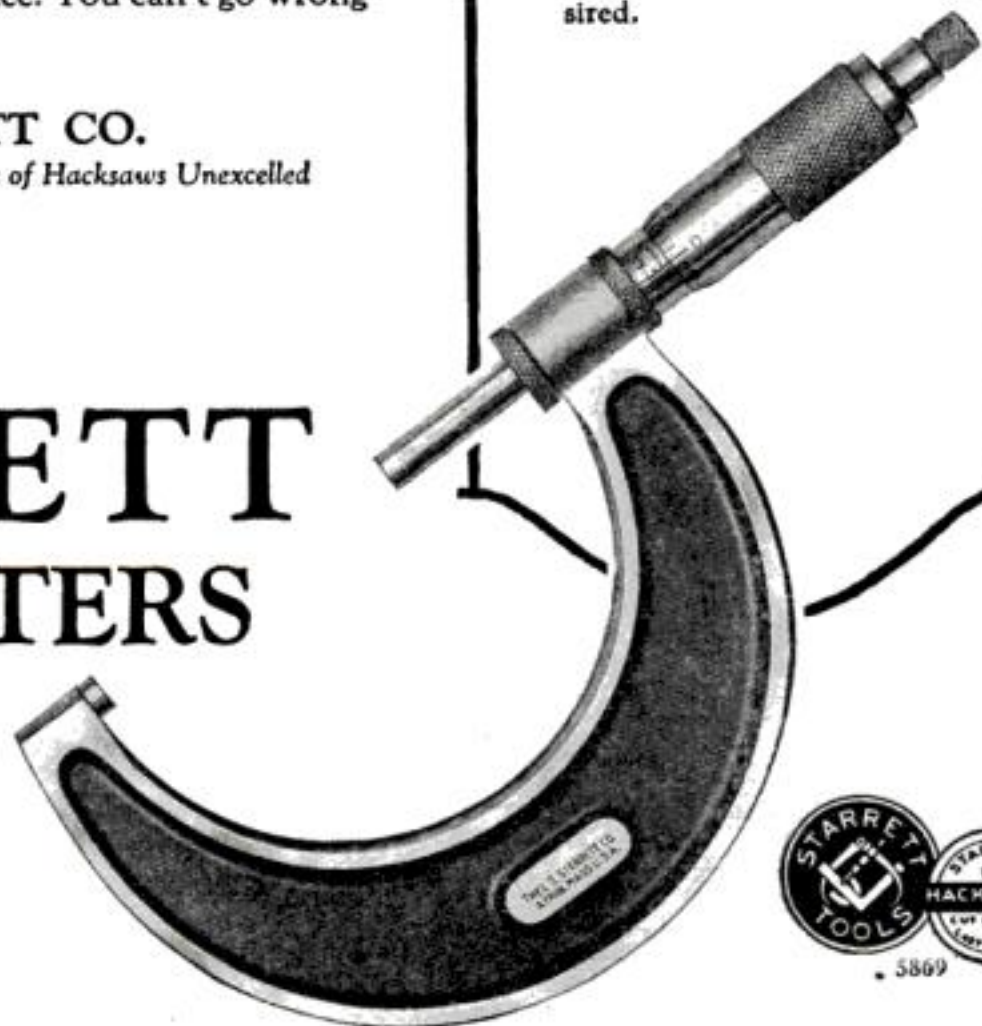

No. 185

Automatic
Drill—
"Mr. Punch."
Length, 10 inches



No. 111
Automatic
Screw-Driver
Length,
extended,
18 inches



Give him a tool for Christmas

HERE are two of the best tools made—for handy men, for men who work with tools, for boys who build things.

Each is packed in a Special Gift Box—all ready to present on Christmas morning.

The Goodell-Pratt Automatic Drill, "Mr. Punch," bores holes—any size from $\frac{1}{16}$ to $\frac{11}{64}$ of an inch. In the handle are eight different size drill points. You get the one you want by turning the top cap. Fit the point into the chuck. Then you push and Mr. Punch twists. The hole is made in a jiffy.

The Goodell-Pratt No. 111 Automatic Screw-Driver also turns work into fun. You just push, and the screw sinks in. Three tool-steel blades—hardened, tempered and polished—are included.

Ask Your Hardware Dealer

These Goodell-Pratt Christmas Gifts are sold by hardware stores everywhere. If your dealer hasn't them, order direct from us. Price of each tool is \$2.50.

Mr. Punch says: "Do your Christmas Shopping at the hardware stores."

GOODELL-PRATT COMPANY
GREENFIELD, MASS., U. S. A.

Toolsmiths



Laying Out Machine Work

(Continued from page 82)

to show the sequence in which the operations of laying-out are to be performed.

In general it may be stated that individual parts are usually laid out complete in themselves. When many pieces are to be made alike, a templet is commonly used and the work is done in jigs and fixtures that are themselves laid out to conform to the templet. The templets are made of thin sheet plate.

When locating points on the circumference of the fly line, it is often found that an accumulation of errors caused by the slipping of the divider points and the springing of the legs gives an appreciable difference in location. In fact, if an attempt at division is made by spacing around the circle with consecutive positions of the dividers, no two measurements will agree exactly, even though the workman may use extreme care. The better way is to divide the circumference into fours with two lines at right angles through the center and then re-divide into eighths and sixteenths in the same way until the proper locations are arrived at. Often this will not give the proper number of divisions and the start must be with sixths. This can be accomplished by using the radius as a chord on the dividers for dividing into sixths and proceeding as before. A table of chords is given in most handbooks and will be found invaluable in obtaining accurate results.

Disks of lead are sometimes used to plug holes so that the center can be marked for scribing lines with the dividers. The disks can be compressed or stretched to fit.

Marking Holes for Drilling

Holes that are to be drilled are often laid out with two or three circles inside the drill size circle. These circles are punched at several places, as the oil used on the drill dims the scribed lines. The advantage of the extra circles is in showing if the drill is running out before it has cut to its full diameter. If it is running out, it can be coaxed back by means of a chisel.

Many machinists find difficulty when it comes to lining out large work, for then the piece must be leveled up on an accurate surface plate and a level must, in part, take the place of the square. Be sure that the surface plate is not misused. Moreover, the plate itself should be carefully leveled.

Plumb bobs are used to level up clumsy work. Cylindrical work is first centered and all other points are squared or leveled from these centers. After this the plumb bob is used to transfer the center to the opposite face. When using a long straight edge to transfer through the plumb bob to a lower surface, it is good practice to clamp it to the upper flanges. Any straight edge or square is liable to move unless it is clamped in a true and accurate position.

Rather than project an angle from a small bevel protractor with a scale or straight edge held against the leg, lay out the bevel on a circle and divide a quarter

(Turn to page 86)

GOODELL- PRATT

1500 GOOD TOOLS


NEW — INDISPENSABLE!

This Household Guide enables you to select the right Paint, Varnish, Stain or Enamel for a given purpose. Don't take chances.


Save this Page for reference with your family, your painter and the Sherwin-Williams dealer.



To protect its beauty



To "insure" your roof




To keep linoleum like new



To properly finish woodwork



To keep attractive



To enrich hard wood



For cheerful, satisfactory walls



For permanence and beauty

HOUSEHOLD GUIDE

For Painting, Varnishing, Staining and Enameling

IMPORTANT: Each of the products specified below bears our name and trade mark



TRADE MARK

	TO PAINT <i>Use product named below</i>	TO VARNISH <i>Use product named below</i>	TO STAIN <i>Use product named below</i>	TO ENAMEL <i>Use product named below</i>
AUTOMOBILES	S-W Auto Enamel: for the man who paints his own car	S-W Auto Enamel Clear: a colorless varnish		S-W Auto Enamel: assorted colors
AUTOMOBILE TOPS AND SEATS	S-W Auto Top and S-W Auto Seat Dressing			
BRICK	SWP House Paint: a full oil gloss S-W Concrete Wall Finish: dull finish			Old Dutch Enamel: full gloss for outside exposure
CEILINGS, Interior	Flat-Tone: the washable, flat oil paint	Scar-Not Varnish: for woodwork only; such as beamed ceilings, etc.	S-W Handcraft Stain: Penetrating spirit stain for new hard wood Floorlac: varnish and stain combined, new or old wood	Enameloid: assorted colors
Exterior	SWP House Paint:	Rexpar Varnish: weather resisting, for porch ceilings, etc.	S-W Oil Stain: for new wood	Old Dutch Enamel: white, gray, ivory, gloss or rubbed effect
CONCRETE	S-W Concrete Wall Finish: a paint, resists weather			
DOORS, Interior	SWP House Paint:	Scar-Not Varnish: gloss Velvet Finish Varnish No. 1044: dries to a dull finish without rubbing	Floorlac: a varnish and stain combined S-W Handcraft Stain: penetrating spirit stain for new wood only	Enameloid: assorted colors
Exterior	SWP House Paint:	Rexpar Varnish: weather resisting spar varnish	S-W Oil Stain: for new wood	Old Dutch Enamel: white, gray, ivory. For interior and exterior use
FENCES	SWP House Paint: Metalastic (iron or wire only) S-W Roof and Bridge Paint: for rough work		S-W Preservative Shingle Stain	
FLOORS, Interior (wood) ..	S-W Inside Floor Paint: stands repeated scrubbing	Mar-Not Varnish: water resisting, heel-proof	Floorlac: a varnish and stain combined	S-W Inside Floor Paint: the enamel-like finish
Concrete	S-W Concrete Floor Finish: wears well; washes well			S-W Concrete Floor Finish: high-gloss; durable
Porch	S-W Porch and Deck Paint:			
FURNITURE, Indoors	Enameloid: the decorative enamel	Scar-Not Varnish: stands hard usage	Floorlac: a varnish and stain combined	Old Dutch Enamel: white, gray, ivory, gloss or rubbed effect
Porch	Enameloid: assorted colors	Rexpar Varnish: weather resisting	S-W Oil Stain: for new wood	Enameloid: assorted colors
HOUSE OR GARAGE Exterior	SWP House Paint:	Rexpar Varnish: weather resisting	S-W Preservative Shingle Stain	Old Dutch Enamel: coloring gloss
LINOLEUM	S-W Inside Floor Paint: stands repeated scrubbing	Mar-Not Varnish: protects the pattern		S-W Inside Floor Paint: the enamel-like finish
RADIATORS	Flat-Tone: flat oil paint S-W Aluminum or Gold Paint			Enameloid: assorted colors
ROOFS, Shingle	S-W Roof and Bridge Paint: Metalastic		S-W Preservative Shingle Stain	
Metal	Ebonol: black coal tar paint			
COMPOSITION				
SCREENS	S-W Screen Enamel:			S-W Screen Enamel
TOYS	S-W Family Paint: assorted color	Rexpar Varnish:	Floorlac: (inside use) a varnish and stain combined	Enameloid: assorted colors
WALLS, Interior (Plaster or Wallboard)	Flat-Tone: the washable, flat oil paint SWP House Paint: a full oil gloss			Old Dutch Enamel: white, gray, ivory, gloss or rubbed effect Enameloid: assorted colors
WOODWORK, Interior ..	SWP House Paint: gloss Flat-Tone: flat oil paint	Scar-Not Varnish: high gloss but can be rubbed to a dull finish Velvet Finish Varnish No. 1044: dries dull without rubbing	S-W Handcraft Stain: penetrating spirit stain for new hardwood S-W Oil Stain: for new soft wood Floorlac: for new or old wood: a varnish and stain combined	Old Dutch Enamel: white, gray, ivory, dull or gloss, aristocrat of enamels, specified by leading architects Enameloid: assorted colors

NOTE: Best results can be had by following the carefully prepared directions on labels.

SHERWIN-WILLIAMS
PAINTS AND VARNISHES



Copyright, 1923, by
The Sherwin-Williams Co.



To "renew" your car

Mark on the "Household Guide" the particular surface or article you have in mind to finish. The Guide covers the more common problems. If you have some painting, varnishing, enameling or staining problems in your house, not covered by the Guide, write us. A more extensive Guide will be found at the store of your Sherwin-Williams dealer—prominently displayed—a part of his service.

Write for free booklet B450 with complete Household Guide and helpful information on all painting, varnishing, staining and enameling. Valuable whether you do the work yourself or employ a master painter.

Send 50c (65c in Canada) for Home Painting Manual, 177 pages, handsome full color plates. Most complete book on the subject ever published. Address Dept. B. 435.

THE SHERWIN-WILLIAMS CO., 601 Canal Rd., Cleveland, Ohio



Crossroads of Conversation

Could the telephone directory in the hands of each subscriber be revised from hour to hour, there would be no need for the information operator. But even during its printing and binding, thousands of changes take place in the telephone community. New subscribers are added to the list. Old ones move their places of business or of residence.

Though their names are not listed on the directory, these subscribers must be connected by the highways of speech with all others in the community. To supplement the printed page, there must be guides at the crossroads of conversation.

Such are the information operators, selected for their task because of quickness and accuracy, courtesy and intelligence. At their desks, connected with the switchboards in central offices, they relieve the regular operators from answering thousands of questions about telephone numbers that would otherwise impede the rendering of service. If they are unnecessarily asked for numbers already in the directory, service is retarded.

"Information" stands for the most complete utilization of telephone facilities.



"BELL SYSTEM" AMERICAN TELEPHONE AND TELEGRAPH COMPANY AND ASSOCIATED COMPANIES

*One Policy, One System, Universal Service,
and all directed toward Better Service*



Save Your Tools and Save Money!

A place for every Tool and every Tool in a GERSTNER Case will save both money and Tools. A style, size and price to suit all trades. Catalog free.

H. Gerstner & Sons
345 Columbia St., Dayton, Ohio

\$3 Cash Buys Typewriter



Balance Only \$5 Monthly
Save 35 to 60% on all standard makes—Underwood, Royal, Remington, etc. Every machine thoroughly rebuilt and GUARANTEED. Try five days at our expense before you buy.

WRITE at once for Free Descriptive Circular and Special Low Prices.

Wynn Typewriter Exchange 21 Reliance Bldg. Kansas City, Mo.

5 DAYS FREE TRIAL

WORK FOR UNCLE SAM

"The best employer in the world"

Wonderful opportunity for men and women. Thousands of appointments yearly. Good salaries, short hours, liberal vacations. Positions open now in every city of the country and in Alaska, Porto Rico, Hawaii and the Philippines. Write for FREE CIVIL SERVICE BOOKLET, which tells how to get a position with the U. S. Government.

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7667-C Scranton, Penna.



Laying Out Machine Work

(Continued from page 84)

segment into the number of spaces necessary to give the bevel required.

Be careful when studying a print to get the right side of any angular work and ascertain whether the angular position is taken from the vertical or horizontal.

The first line scribed with a center head should be checked by reversing the head and scribing another line through it. If the head is off or the scale is loose or out of true, a double line will show. The same is true of lines drawn with a square.

Parallel lines drawn with other than surface gages or height gages should be projected by swinging arcs from the first line. Finally recheck all layouts with the utmost care.

Water Still Cheaply Made for Auto Repair Shops

A WATER still is a necessity in auto repair shops and often a convenience in the home. A simple and yet efficient still can be made and used in any place where a source of low-pressure steam can be obtained; in other places the hot-water tanks can be converted into steam generators with but slight alterations.

In the latter case a steam line is inserted in the top of the water tank with a low-pressure steam gage and a safety valve that will blow off at 10 pounds. The water is kept below the

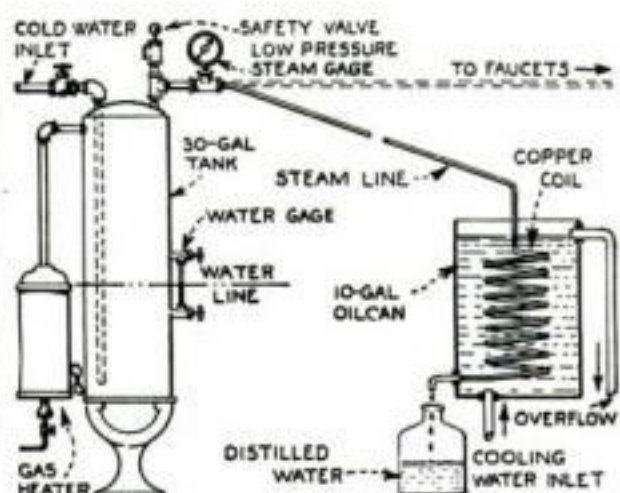



Diagram showing a typical installation using steam from hot-water boiler

line shown in the illustration, its level being indicated on the water gage at the side.

The still itself consists of a 10-gal. oilcan with the top removed and a copper coil. The steam is led through the coil, where it condenses and the distilled water flows out of the end of the coil, which projects from the tank near the bottom. Cooling water is led into the bottom of the tank and an overflow pipe is soldered to the tank near the top.

Any source of low-pressure steam will work well. Steam-heating systems and steam-pressure cookers properly equipped with valves and gages may safely be used in conjunction with this still.—JOHN H. SCHALEK, Pittsburgh, Pa.

IN THE absence of borax, powdered glass makes an excellent flux for brazing. Heat the glass to redness, drop into cold water, and pulverize.

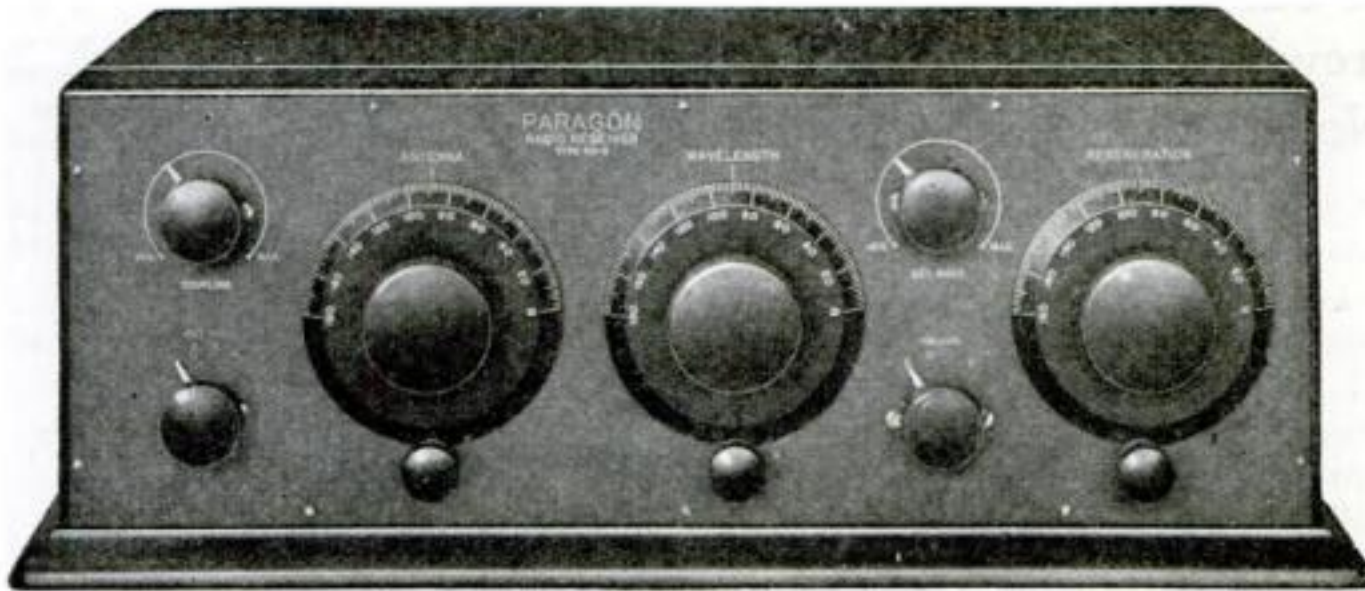

Type RB-2

Price \$135.00

Announcing a New Paragon Receiver —the Ideal Family Christmas Gift

What could be a more wonderful Christmas gift than a radio receiving set that you *know* is the best that money can buy? Think of the pleasure it will bring to every member of the family, young and old. Think of the happiness it will mean to you every night of the year.

PARAGON Radio Receivers are famous as the three circuit pioneers which have proved their superiority by eight years of practical operation.

The newest PARAGON, pictured above, is the last word in sensitivity and selectivity. The superiority of this type over all other classes of receiving equipment has been thoroughly proved by the long list of distance records which it holds. Included in these records are the reception of the first trans-continental amateur message, the reception of the first trans-Atlantic message, and the unbroken communication which it has maintained with the McMillan Expedition frozen in above the Arctic Circle.

The operation of the new PARAGON

receiver is so materially simplified that even in the hands of a novice it equals in every way the performance of the older type in the hands of an expert.

You need only switch on the tubes, set the calibrated dial and turn two other dials that automatically give you their proper position for the reception of any given broadcasting station.

In appearance it is an addition to any home. All cabinet work is of mahogany with a brown mahogany finish. All metal parts showing, inside as well as outside of the cabinet, are nickel plated. 98% of the wiring is invisible. The whole outfit is compact, neat, solidly built, and finely finished. It is the ideal Radio receiver and the ideal holiday gift.

An illustrated Catalog of Paragon Radio Products is yours for the asking.

Dealers: We believe in the proper distribution of Paragon Radio Products. Our Exclusive Distributors are particularly interested in territorially protected dealers, who will concentrate, solicit and serve the consumer in the sale of Paragon Radio Receivers. If interested, write us for details.

ADAMS-MORGAN CO., 18 Alvin Avenue, Upper Montclair, N. J.

PARAGON

Reg. U. S. Pat. Off.

RADIO PRODUCTS

Another Addition to our RatchetScrewDriverLine No. 59

YOU hear people say, "I can't seem to find a ratchet screw driver strong enough for the kind of work I do." Maybe you've said it yourself. If so, don't waste time. Stop in at the nearest hardware store and ask the man behind the counter to show you this new Millers Falls Ratchet Screw Driver No. 59.

It is made especially for electricians, gunsmiths, mechanics and others whose work demands a screw driver more rugged than the regular type. Same design as our popular No. 63 line of ratchet screw drivers. Your kit isn't complete without this tool. The more you use it, the better you'll like it.

- Specifications:**
- Ratchet Pawls—Tool Steel.
 - Ratchet frame—cold rolled steel.
 - Handle—hardwood, highly polished. Shaped to hand. Thumb rest at lower end.
 - Diameter of ratchet— $\frac{7}{8}$ in.
 - Length of blade— $1\frac{1}{2}$ in.
 - Ratchet springs—spring steel.
 - Blade—highest quality screw driver steel, hardened and tempered.
 - Exposed metal parts polished and nickel plated.
 - Diameter of blade— $\frac{5}{16}$ in.
 - Cabinet type.
 - Length overall— $6\frac{1}{4}$ in.



Ratchet operates either to right or left by turning shifter ring. At 0 it becomes a solid screw driver.

MILLERS FALLS COMPANY
Millers Falls, Mass.
Manufacturers of Carpenters' Tools, Hack Saws and Automobile Tools



Tilting Table for Milling Tapers


AS THE milling machine has no arrangement by which the table can be thrown out of the horizontal, it is often useful to have a special tilting table for tapered work, such as taps, reamers, and the like.

The table should be as wide as the index centers with which it is to be used. By bolting irons to the table, all kinds of tapered work can be done. The angle of tilt is determined accurately by means of a sine bar. If the taper wanted is out

of range of the elevating screw, one side of the table can be blocked up.

The edge of the table has been left clear of the rib usually found on tilting tables; this makes it easier to clamp work to it. Another improvement is the finishing of the under edges parallel to the top.

While the table shown here is made with castings, smaller tables are made of machine steel.

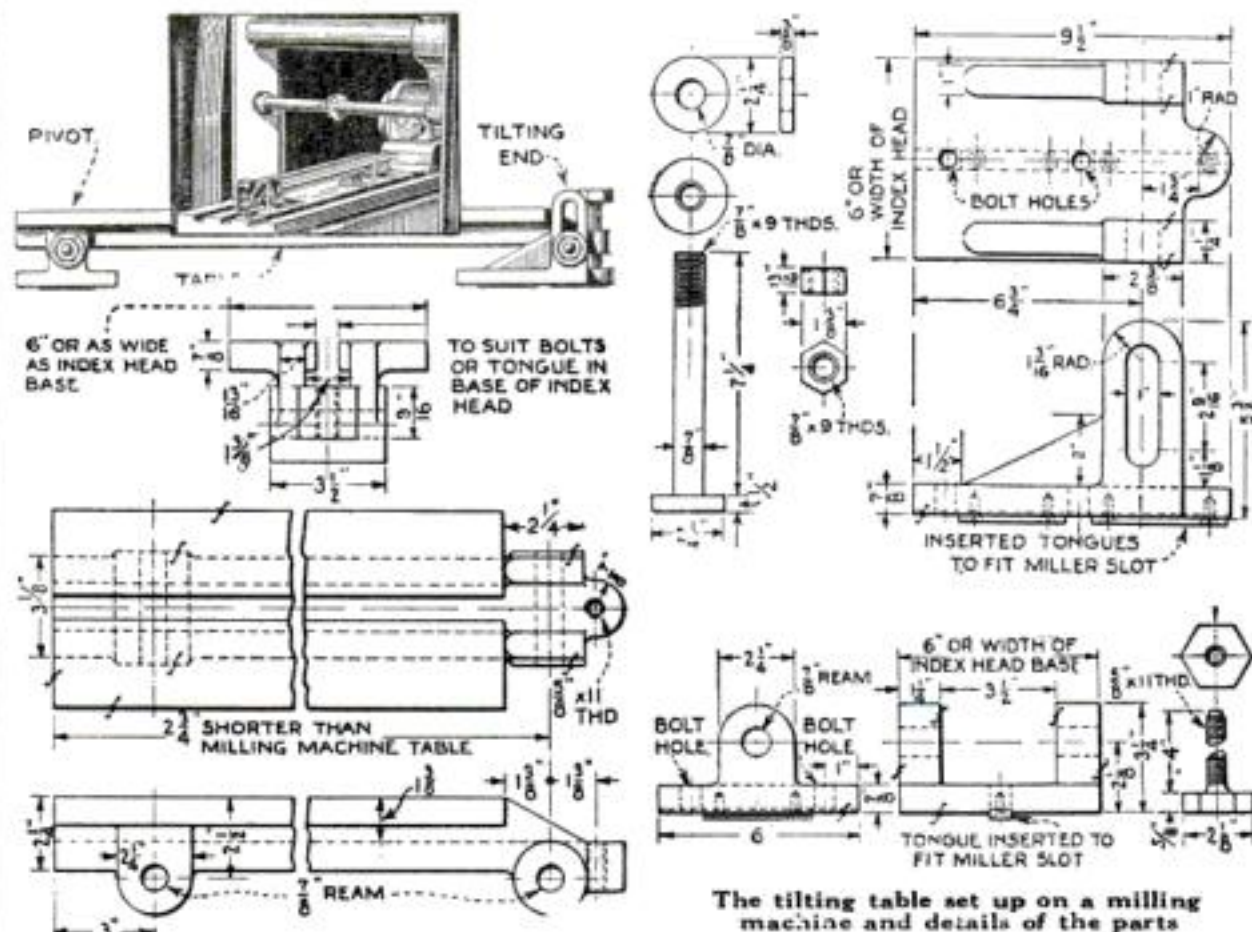

The tilting table set up on a milling machine and details of the parts

A Gift for Yourself

WHY not give yourself a year's subscription to POPULAR SCIENCE MONTHLY?

You know that in POPULAR SCIENCE MONTHLY you will get the most fascinating reading published, and will get it promptly every month delivered to your home.

If you also give a year's subscription to some good friend, we will make a very attractive special Christmas offer.

You can have POPULAR SCIENCE MONTHLY delivered to a friend for one year at a cost of \$2.50—or even less if you order two subscriptions as follows:

One Subscription \$2.50
Two subscriptions only \$4.00

One of the subscriptions may be your own, or both may be gift subscriptions. If you wish more than two subscriptions add \$2.00 for each additional subscription.

A gift card announcing your gift will be sent to each friend to whom you give POPULAR SCIENCE MONTHLY. Send your order early—use the order blank below or, if you prefer, an ordinary sheet of paper. Write the address plainly.

POPULAR SCIENCE MONTHLY
225 West 39th Street, New York

For the \$..... enclosed please send POPULAR SCIENCE MONTHLY for one year to

- Name.....
Address.....
- Name.....
Address.....
Ordered by.....
Address.....

Dec. '23



Wonderful 32-Piece Aluminum Set consists of 2 Bread Pans; Doughnut Cutter; 2 Loose Bottom Jelly Cake Pans; Combination Teakettle and Rice Boiler with lid; Saucepan Set with lid; Dipper; Colander; Measuring Cup; Percolator; 2 Pie Pans; Complete Castor Set; Tea or Coffee Strainer; Fry Pan; also cooker set of 5 pieces—makes 11 separate utensil combinations; Preserving Kettle; Convex Kettle; Combination Cooker; Casserole; Pudding Pan; Tubed Cake Pan; Colander; Roaster; Corn Popper; Steamer Set; Double Boiler.

FREE 10-Piece White Enamelled Kitchen Set



No Money Down

Not a penny now. Just mail the coupon and Hartman will send you this splendid complete 32-piece Aluminum Cooking Set, and also the Free 10-piece Combination Kitchen Set. When the goods arrive make first payment of only \$2.00 on the Aluminum Set. Pay nothing for the

Kitchen Set—it is FREE. Use both sets 30 days on Free Trial, and if not more than satisfied, send them back and we will refund your money and pay transportation both ways. If you keep them, pay for the Aluminum Set, a little every month. Keep the Kitchen Set as a gift from Hartman.

Complete 32-Pc. Aluminum Set and FREE Kitchen Set

This is Hartman's famous special, selected set of heavy gauge Aluminum Ware—a complete cooking outfit, light to handle, easy to clean, always bright as silver. Will never chip, crack or rust. So durable that we guarantee it for life. 32 utensils—everything you need for baking, boiling, roasting, frying. Just read the list above. You want and need everything there. Your kitchen is not complete without them. You really can't appreciate this splendid set until you see and use it. Then you will realize what a wonderful bargain it is. And without a penny's cost—absolutely free—you get a Combination Kitchen Set which gives you 10 utensils with white handles—all hung in a row—where you can reach them easily.

Nearly a Year to Pay Hartman gives the world's most liberal terms and the world's greatest values in dependable merchandise, and this offer proves it. You pay only \$2.00 and postage on arrival (this on the Aluminum Set—not a penny to pay at any time on the Kitchen Set). Then, if after 30 days' trial you decide to keep it, pay a little every month. Take nearly a year to pay.

FREE 10-PIECE KITCHEN SET

Not a penny to pay for this set. You get it absolutely free with Aluminum Set.

Potato Masher
Mixing Spoon
Measuring Spoon
Ice Pick
Egg and Cream Beater
Can Opener
Vegetable and Pan Brush
Fork
Egg and Cake Turner
Wall Rack

All have white enameled handles and hang on wall rack, keeping them conveniently at hand.

HARTMAN FURNITURE & CARPET CO.
Dept. 5852 Chicago, Ill.

Send the 32-Piece Aluminum Cooking Set No. 417EEMA7, Price \$18.95, and 10-Piece Kitchen Set. Will pay \$2 and postage on the Aluminum Set on arrival. Kitchen Set is FREE. I am to have 30 days' free trial. If not satisfied, I will ship both sets back. If I keep them, I will pay you \$2 monthly until the price of the Aluminum Set, \$18.95, is paid. Title remains with you until final payment is made.

Name _____
Occupation _____
R. F. D., Box No. _____
or Street and No. _____
Post Office _____ State _____
If shipping point is different from your post office, fill in line below
Send shipment to _____




FREE Bargain Catalog and FREE GIFTS

This great 316-page book offers the world's greatest bargains in home furnishings, jewelry and farm machinery—all sold on easy monthly payment terms and 30 days' free trial on everything. **WONDERFUL GIFTS** Catalog explains how you can get Glassware, Silverware, Tablecloths, Napkins, etc., free with purchases. Send for it today. "Let Hartman Feather YOUR Nest!"

Order by No. 417EEMA7. Price for Aluminum Set, \$18.95. No money down. \$2.00 and postage on arrival. Balance \$2.00 monthly. 10-Piece Kitchen Set is FREE. Don't hesitate. Send at once, while this offer holds good. Not a penny's risk. Order NOW, while you can get the Kitchen Set Free.

HARTMAN FURNITURE & CARPET CO.
Dept. 5852 Copyright, 1928, by Hartman's, Chicago CHICAGO

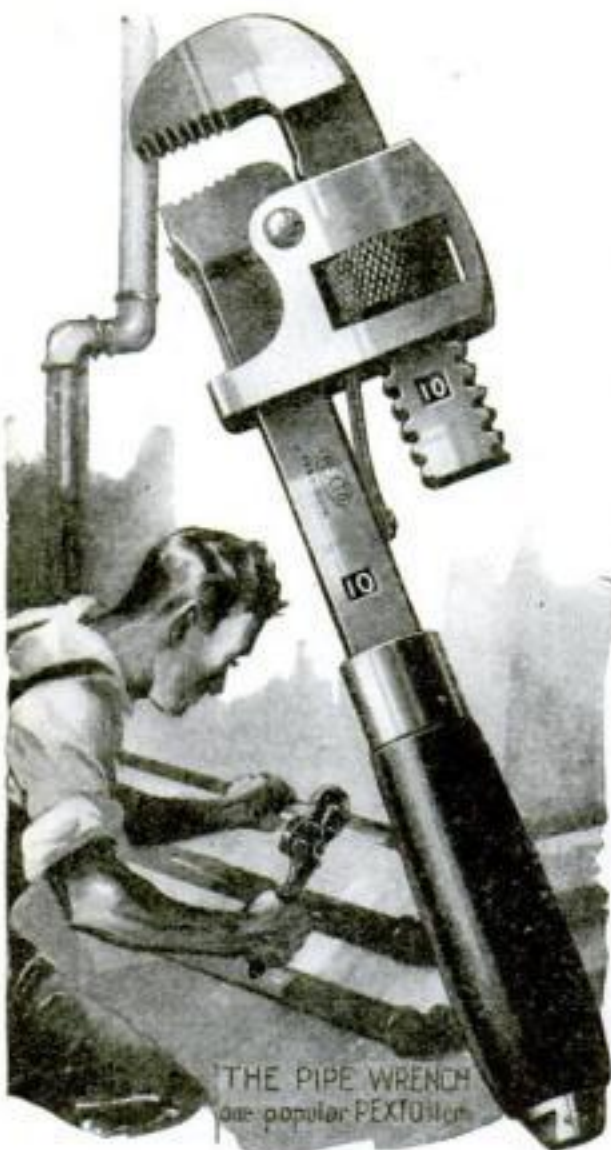

THE Peck, Stow & Wilcox Co. has been making good tools for more than 100 years. These tools formerly branded P. S. & W. Co., now branded PEXTO, are of the highest quality and are **FULLY GUARANTEED** as to workmanship and materials.

The line consists of Bit Braces, Auger Bits, Squares, Chisels, Hammers, Hatchets, Pliers, Monkey and Pipe Wrenches, Angle Wrenches, Screw Drivers, Snips, Compasses, Pruning Shears, Dividers, Calipers, Pincers, Soldering Coppers, Nail Sets, and many other small tools.

Booklets covering our important lines are available for free distribution.

PEXTO TOOLS are carried by practically all progressive dealers.




WORTH WHILE TOOLS

The Peck, Stow & Wilcox Company
Southington, Conn., U. S. A.

Micrometer Stop for Lathe

VERY often it is desirable to control the travel of the lathe carriage within closer ranges than can be accomplished with a non-adjustable stop fastened to the frame. By constructing such a stop body as shown so that it will hold a commercial micrometer head, and bringing the carriage to a stop against this, it will be found that the limits can be fixed much more accurately.

The micrometer head should fit snugly in the hole provided for it, but the tension stop screw should be adjusted so that it

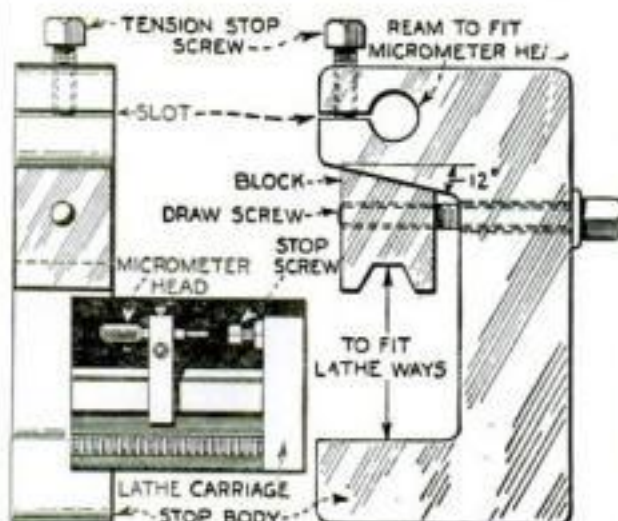


A micrometer head clamped to the lathe bed serves as an accurate stop

will not bind the thimble and prevent it from revolving freely.

The distance between the block and stop body, as well as the notch in the block, should be designed to fit the lathe ways. When the draw screw is turned to the right, the block is drawn down the 12-degree incline and clamps the stop in place. The micrometer screw can then be turned so that the proper travel limit will be established when the stop screw on the carriage bears against the head. Care must be taken not to bring the lathe carriage against the micrometer with too much force.

Flexible Gas Heating Torch

FOR bench use the gas burning torch illustrated has several advantages. Because of the direct connection through a flexible metal tube with the gas line, the torch can be lit more quickly than a regular blowtorch. The flame is adjusted through the spreader and the intensity is controlled jointly through the gas

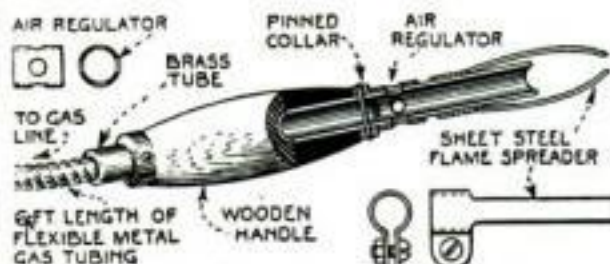

For bench use this gas torch gives an easily regulated flame the moment it is lit

petcock and the air inlet valve of the torch itself. The body is a brass tube fitted to a wooden handle with small thimbles. The air inlet is a sleeve fitting the center tube snugly, holes being drilled through both. The flame spreader is made of one piece of steel, as shown.

For Pleasure or Profit

Every man has a hobby from which he derives either pleasure or profit—or both. Through a better job, more quickly, more easily done, the man whose hobby is working in wood or soft metals can get more pleasure and more profit from work done on a

Boice-Built Bench Machine

The Pony Bench Machine shown here combines six machines in one: Saw, sander, drill, grinder, polisher and buffer. It saws 1½-inch stock with ease, and does mitering, dadoing, tenoning, etc. Easily driven by ¼-hp. or 1/3-hp. motor. Boice-Built machines are in use in thousands of shops, both industrial and private.

An Excellent Gift for Man or Boy

As a gift nothing could be more appreciated by the man or boy who likes to work with wood and soft metals. It will bring years of pleasure and profit to the recipient.

Sold on a positive guarantee. Every Boice-Built Machine is sold with a ten day trial money back guarantee.



The complete line of Boice-Built Bench Machines includes larger Bench Saws, Bench Band Saws, Bench Lathes, Bench Drills, Bench Jointers, and Motors. Write today for completely descriptive circular on any of these machines.

W. B. & J. E. Boice, Dept. P. S. 12, Toledo, Ohio



Pants Always Pressed

STAYPREST Trouser Presser puts a real master-tailor crease in pants. Takes the bag out of knees and removes wrinkles. Easy to use—takes only a few seconds. Always a like-new press without delay or trouble. A real convenience. Saves many dollars in pressing bills, and trousers always look like just from the tailor. Makes them last longer. Saves nap of cloth which ironing ruins. Every man should have at least one or two.

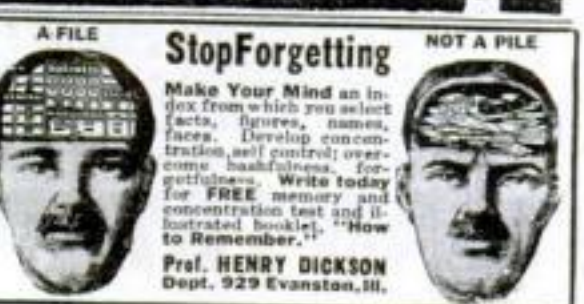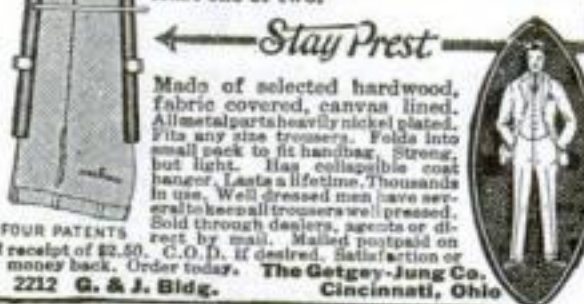

The "A" Battery's Power in Your Radio Receiving Set

THIS IS NUMBER TWO OF A SERIES

THE sole purpose of the "A" Battery in your Radio Receiving Set is to furnish current to heat the filaments of the tubes.

And this can be done satisfactorily only by an "A" Battery that supplies an adequate steady current.

Anticipating the popularity of the dry cell tube in Radio, and realizing that it required a Dry Cell capable of standing up under service conditions differing from what dry cells are called upon to meet in other fields, the National Carbon Company developed the Eveready Radio Dry Cell specifically for this new use.

A dry cell gives its maximum service only when designed especially for the work it is intended to perform. There are for dry cells several uses which are so alike that one type of cell serves for all. This is the field covered by the ignition or general purpose dry cell.

The conditions encountered in Radio are different from the conditions grouped together under the term "general purpose." And while the general purpose dry cell performs well as an "A" Battery, it was found possible to produce a Dry Cell "A" Battery capable of delivering more service on Radio loads.

Thirty years of dry cell experience and an immense research organization resulted in the superior Eveready Radio Dry Cell. One of the outstanding features of this special cell is that while it will last much longer when used as an "A" Battery, it is no larger than the standard dry cell.

The increased service life of the Eveready Dry Cell "A" Battery greatly offsets the slight increase in cost; so this battery is not only the best, but it is the most economical you can buy. "The Story of Eveready Dry Cell Radio 'A' Batteries," which tells how to use Dry Cells to the greatest advantage with the various dry cell tubes now available, will be sent to you free on request.

* * * *

The "A" Battery gives power to your Radio Receiving Set. Eveready Batteries—especially made for Radio—serve better, last longer, give better results.

Note: This is number 2 of a series of informative advertisements which will appear in this magazine. They are designed to help users get the most out of their Batteries and their Radio Sets. If you have any battery problem, write to G. C. Furness, Manager Radio Division, National Carbon Company, Inc., 116 Thompson Ave., Long Island City, N. Y.



POWER for Your Radio Set

Eveready Dry Cell
Radio "A" Battery
(No. 7111)

Directions and wiring diagrams on the jacket tell just how to use this battery with the different dry cell tubes.

This special Radio Cell is also available in two and four cell multiple batteries for receiving sets employing from two to four WD-11 or WD-12 tubes.

Other Radio Batteries

Eveready Storage "A" Batteries—best suited for filament heating of all Radio Tubes not especially designed for dry cells. The quality storage battery with the long life plates, \$15 to \$20.

Eveready "B" Batteries—the life of your Radio.

Eveready "Three" Battery—3 cells, 3 purposes.


Manufactured and guaranteed by

NATIONAL CARBON COMPANY, Inc.

EVEREADY

Radio Batteries

—they last longer

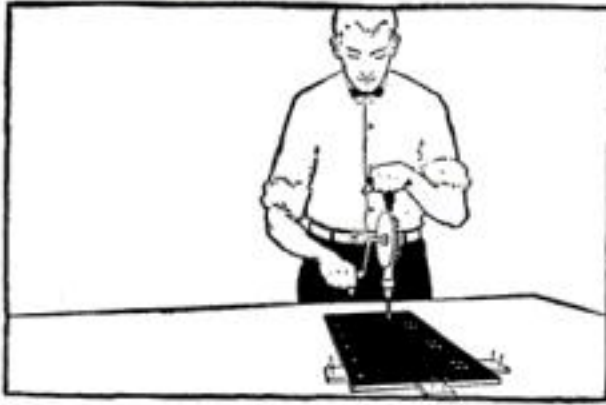

The Supreme Insulation
RADION
 Panels
 are easiest
 to drill, saw
 or engrave
 with simple
 tools at
 home

18 Stock Size Panels

Furnished in 18 stock sizes.

6 x 7	7 x 21
6 x 10½	7 x 24
6 x 14	7 x 48
6 x 21	9 x 14
7 x 9	10 x 12
7 x 10	12 x 14
7 x 12	12 x 21
7 x 14	14 x 18
7 x 18	20 x 24

Radion, being an insulation material especially made for wireless use, has the lowest phase angle difference, lowest dielectric constant, highest resistivity and supreme moisture, gas and acid repelling properties.

Send 15c for sample test piece of RADION pane! 2x3 in. Try it with your own drill.

American Hard Rubber Co.
 11 Mercer St., New York


RADION
 Panels - Dials - Knobs - Sockets - Insulators



Extension Arm Aids Draftsman in Drawing Large Work

ALL draftsmen who have used small drawingboards know how difficult it is to scribe radii, the centers of which are beyond the edges of the board. In such cases a detachable extension arm is a great aid.

The device illustrated consists of a clamping fixture and a soft wooden arm. Two pieces of steel with a spacer between are riveted together and a thumbscrew

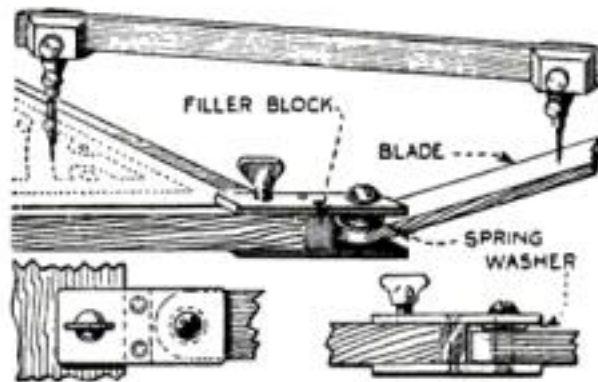


How the arm is used for scribing a large arc, and details of the clamp

is used to clamp the fixture to the drawingboard wherever needed. The arm itself is pivoted between the steel pieces by means of a screw and spring washer. The tension should be adjusted so that the arm will remain quite firmly wherever placed.—C. M. WILCOX.

Direct-Setting Scriber Extends Range of Machinist's Square

BY MEANS of the simple attachment shown, an ordinary square is converted into a direct-setting scriber that will be found useful when scratching a center line on work that is strapped on a planer table and in many other places where the work is not easily accessible.

The drawing explains itself, but it should be noted that the beveled, cutaway setting edge is in the same plane as the scriber retaining hole. Thus, when the setting edge is brought to its predetermined position and clamped by the thumb-screws, the scriber point will be the same

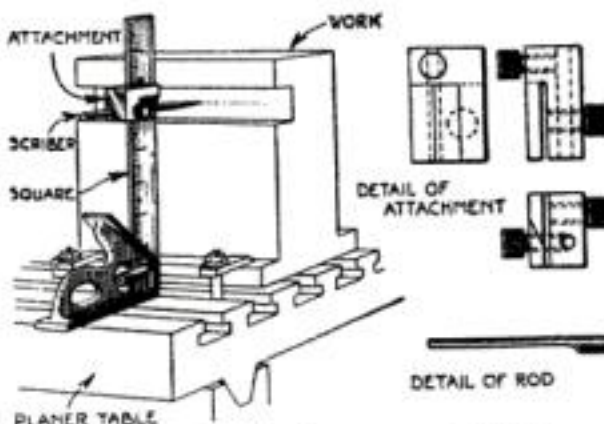

Reading on scale shows actual height of scriber point above table

distance from the bottom of the square as the reading on the scale indicates.

By substituting a rod milled as shown in the detail in place of a scriber point, the device can be used as a direct-reading surface gage, wherever circumstances permit. In difficult locations, when the special rod cannot be used, the difficulties may be overcome through the agency of a common curved point, the contrivance then being used as surface gage.

Radio Bargains for THIS MONTH

Hedgehog Transformer.....	\$3.15
Reflex Crystal.....	.89
Battery Test Clips (each).....	.05
199 Tube Adapter.....	.49
Licensed Neutrodyne Parts.....	19.98
Rheostats, 6, 25, 40 ohm.....	.69
Variocoupler or Variometer (180 degree) each.....	1.28
Erla Reflex Transformer.....	4.65
Murdock 2000 Ohm Phones.....	3.65
Jewell Lightning Arrester.....	.98
Cico Two-way Plug.....	.49
Cockaday Coil, each.....	1.89
Contact Points or Switch Stops, per dozen.....	.10
Special Prices on Tubes, Magnet Wire, etc.	

Clip this List—Check Items You Want. Enclose with Money Order


Your Order will be Filled by Return Mail Postage Free—Satisfaction or money back

FANS LIST OF FREE BARGAINS

RADIO BARGAINS
 17 N. LA SALLE ST-CHICAGO

"The Biggest Little Lathe Built"

THE MONARCH

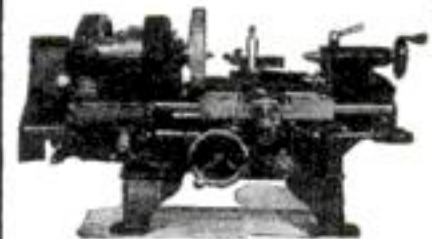

Junior Engine Lathe 9-inch Engine Lathe 2½ ft. bed \$245

Here is a sturdy, small engine lathe built with the same quality construction that has made MONARCH Lathes standard the world over. Guaranteed to do any small work any other lathe will do and do it with 1/1000 of an inch accuracy. It will fit in any shop or home work room. Easy to learn to operate.

Write for Free Catalogue of MONARCH Lathes which are built up to 30-inch swing.

THE MONARCH MACHINE TOOL CO.
 401 Oak Street Sidney, Ohio

How To Make Things Electrical

Have the fun of doing it yourself and save half the cost

This book gives directions for making hundreds of electrical appliances and devices for the home, the shop and the garage. The simple directions and many drawings make the work easy.

429 pp. Price, \$1.50 postpaid

POPULAR SCIENCE MONTHLY
 225 West 39th Street, New York City

MIRACO
 GETS 'EM FROM COAST TO COAST

Price Only \$29.50

At rock-bottom prices you get the efficiency of sets costing three times as much. Users tell us that Miraco Radio frequency receivers pick up stations from coast to coast. Operate either on dry cells or storage battery. Solid mahogany cabinets—finest workmanship throughout. Order direct or send for bulletin.

One tube outfit.....	\$18.50
Two tube outfit.....	\$29.50
Four tube outfit.....	\$44.50

DEALERS—Write for proposition quickly—it's a winner.

THE MIDWEST RADIO COMPANY
 808 Main Street Cincinnati, Ohio

Radio Catalogue Free—

**Write us
a post card—**

Address Dept. 5-R

and we will send you free this 52 page catalogue of radio sets and parts. It also contains explanation of radio terms, map and list of broadcasting stations and much radio information, including an explanation of successful hook-ups and circuits.

You will be amazed at the low prices Ward's quote. A complete tube set having a range of 500 miles and more, including tubes, head set, batteries, and antenna equipment, as low as \$23.50.

This catalogue contains everything for the expert and amateur. Complete sets and every improved part for building sets, all the most up-to-date devices—at the lowest possible prices.

Headquarters for Radio

Montgomery Ward & Co. is headquarters for Radio, selling everything direct by mail without the usual "Radio-profits." Why pay higher prices? Ward quality is the best and the prices will often save you one-third. Everything sold under our Fifty Year Old Guarantee,—Your Money Back if You Are Not Satisfied. Write today for your copy of this complete 52-page Radio Book.

Write to our house nearest you. Address Dept. 5-R

Chicago Kansas City St. Paul Portland, Ore. Ft. Worth

Montgomery Ward & Co.

The Oldest Mail Order House is Today the Most Progressive



Inspect it— point by point



- 1 In our previous advertisements we explained three points of superiority of Brown & Sharpe Micrometers. The first of these is the Precision Measuring Screw made on our special machines.
- 2 The second point of superiority is the Clean Cut Graduations. The first graduating machine in America was a Brown & Sharpe.
- 3 The third point of superiority is the accurate Fit of the Spindle and Anvil testified by the many Brown & Sharpe Micrometers in use 30 or 40 years and giving faithful, accurate service today. Now we invite your inspection of the complete superiority of Brown & Sharpe Micrometers, point by point.

BROWN & SHARPE MICROMETER CALIPER No. 8

Brown & Sharpe Micrometers are made in the largest factory of its kind in the world, from the finest material, by skilled workmen. The highly accurate Micrometer Screw is made on our own special machines.

Improved Design is worked out from actual requirements in our large plant.

The Spindle fits the hub.

The Clamp Ring is a Brown & Sharpe invention.

The Adjustments for wear are the best yet devised—although wear after many years of use is scarcely perceptible.

The Finish of the micrometer is distinguishing and in keeping with the superiority of the Tool.

The Standards we use are our own—and obtained from the Government Bureau of Standards.

Inspection is exacting—here experience is again a factor—we made the first micrometer in America.

The Brown & Sharpe Measuring Machine is our own product and measures to one-one hundred thousandth of an inch.

The Brown & Sharpe Micrometer measures accurately and wears long. Don't ask for a micrometer—demand Brown & Sharpe.

Our Small Tool Catalog describes the complete line of Brown & Sharpe Tools. You may want a copy of "The Micrometer" also—a little text book of valuable information.

Write for them today.

BROWN & SHARPE MFG. CO.

Providence, R. I., U. S. A.

COLD PIPE BENDERS
Standard of the World.
HAND and MOTOR OPERATED
14 Sizes of Machines
What it costs to bend pipe our way. Per bend.
1" pipe 5 cents 4" pipe 25 cents
2" pipe 10 cents 6" pipe 60 cents
8" pipe \$1.00
Send for Catalogue.
AMERICAN PIPE BENDING MACHINE CO.
St. Paul, Minn.

Saw Filing Pays
Buy a Foley Saw Filer and Setter and establish an independent, profitable business. Write today for FREE Catalog. Territory open to interested parties.
FOLEY SAW-TOOL CO.
3613 Portland Avenue
MINNEAPOLIS, MINN.

WORKRITE NEUTROFORMER
(Licensed under Hazeltine Patent No. 1450080)

THIS instrument is made up of one Workrite Variable Condenser and one Workrite Neutrodyne Transformer mounted together. It is correct in every detail. Workrite Neutrodyne parts will make your set efficient and reliable. Use all Workrite Parts.
Workrite Neutroformer.....\$5.50
Workrite Neutrodyne Transformer.....2.00
Workrite Neutrodon......50


WORKRITE NEUTRODYNE KIT
3 WORKRITE NEUTROFORMERS \$17.50
2 WORKRITE NEUTRODONS
Panel chart and complete instructions
ORDER YOUR KIT TODAY!
THE WORKRITE MANUFACTURING CO.
1810 E. 30th St., Cleveland, Ohio
Branch Office, 536 Lake Shore Drive, Chicago

The Ideal Gift For Your Radio Friend

\$15.00
F. O. B. Cleveland
Type 6 charges 6 Volt Storage Battery from any 110 Volt 60 Cycle lamp socket at average rate of 6 amperes, or over if battery needs it.
Scarcely a gift you could think of will bring more genuine appreciation than the satisfaction obtained from an F-F Battery Charger.
Buy from your dealer. If he cannot supply you, write for literature or enclose remittance covering express or postal charges on 9 lbs.
IT'S FREE—Write for Bulletin No. 17.
The France Mfg. Co.
10417 Berea Road Cleveland, Ohio
Pioneer Manufacturers of Patented Battery Chargers

Extractor Pulls Stubborn Roller Bearing Sleeves and Bushings

BUSHINGS and bearing sleeves can easily be removed from their housings by means of the extractor shown. A hollow threaded sleeve is cut longitudinally for three quarters of its length with two slots at right angles to each other. The sleeve is then fitted with a

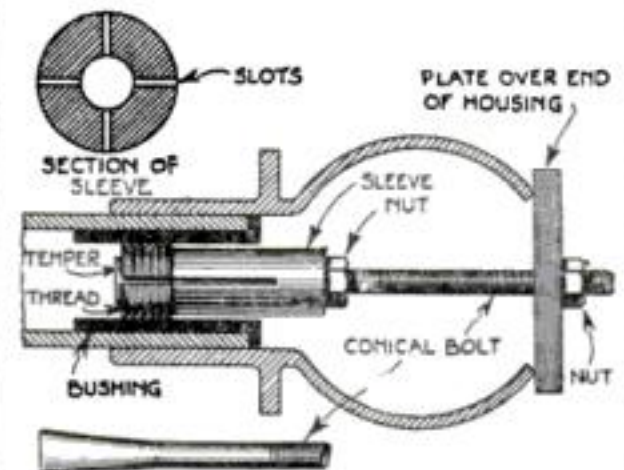


When the outside nut is turned, the threaded sleeve expands and pulls out the bushing

bolt, one end of which is upset to form a cone.

After the sleeve is slipped into the bushing, the expanding screw is drawn tight by turning up the nut, which bears against a plate over the end of the housing. As the pressure is increased, the threads of the sleeve firmly grip the bushing, which is pulled from its seat.

Fluted versus Star Drill

THE star drill is generally used by electricians, plumbers, steamfitters, and other mechanics to drill holes in concrete, brick, and stone. When it becomes dull it must be sharpened by a blacksmith who has the necessary dies and dollies. When used by hand, it also

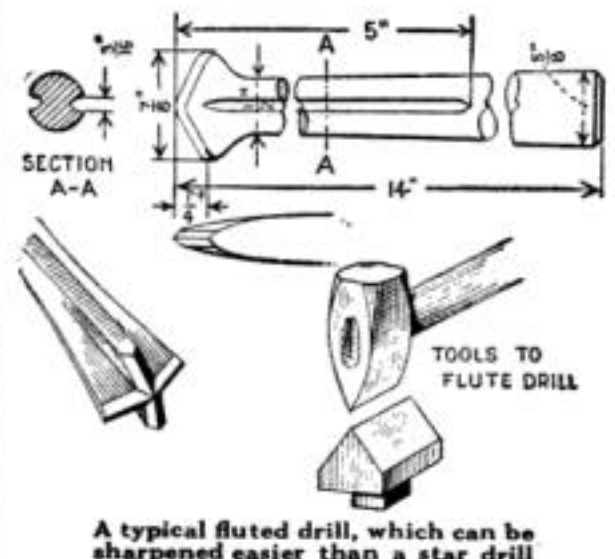

A typical fluted drill, which can be sharpened easier than a star drill

has the objection, to my mind, of requiring more force than necessary, because the center cutting edges tend to retard the cutting.

A tool easily made in the ordinary blacksmith shop, that will drill rapidly and, I believe, with less effort, is the fluted drill illustrated in detail. The flute, which allows the dust to clear itself during drilling, can be made without difficulty by using ordinary splitting tools. The point of the bit is shaped the regular chisel pattern.—J. C. LAMON, Alcoa, Tenn.

MAGNAVOX Products

EVERY condition in the art of radio reproduction is most successfully met by Magnavox apparatus.

Reproducers

R2 with 18 inch horn
\$60.00

R3 with 14 inch horn
\$35.00

M1 with 14 inch horn; for
dry battery sets . \$35.00

Combination Sets

A1-R consists of Magnavox
Reproducer with 14 inch
horn and 1-stage Am-
plifier . . . \$59.00

A2-R same with 2-stage
Amplifier . . . \$85.00


Power Amplifiers

A1-One-stage . . \$27.50

AC-2-C-Two-stage 55.00

AC-3-C-Three-stage 75.00

Radio users will be sent
new 32-page Magnavox Ra-
dio Catalogue on request.

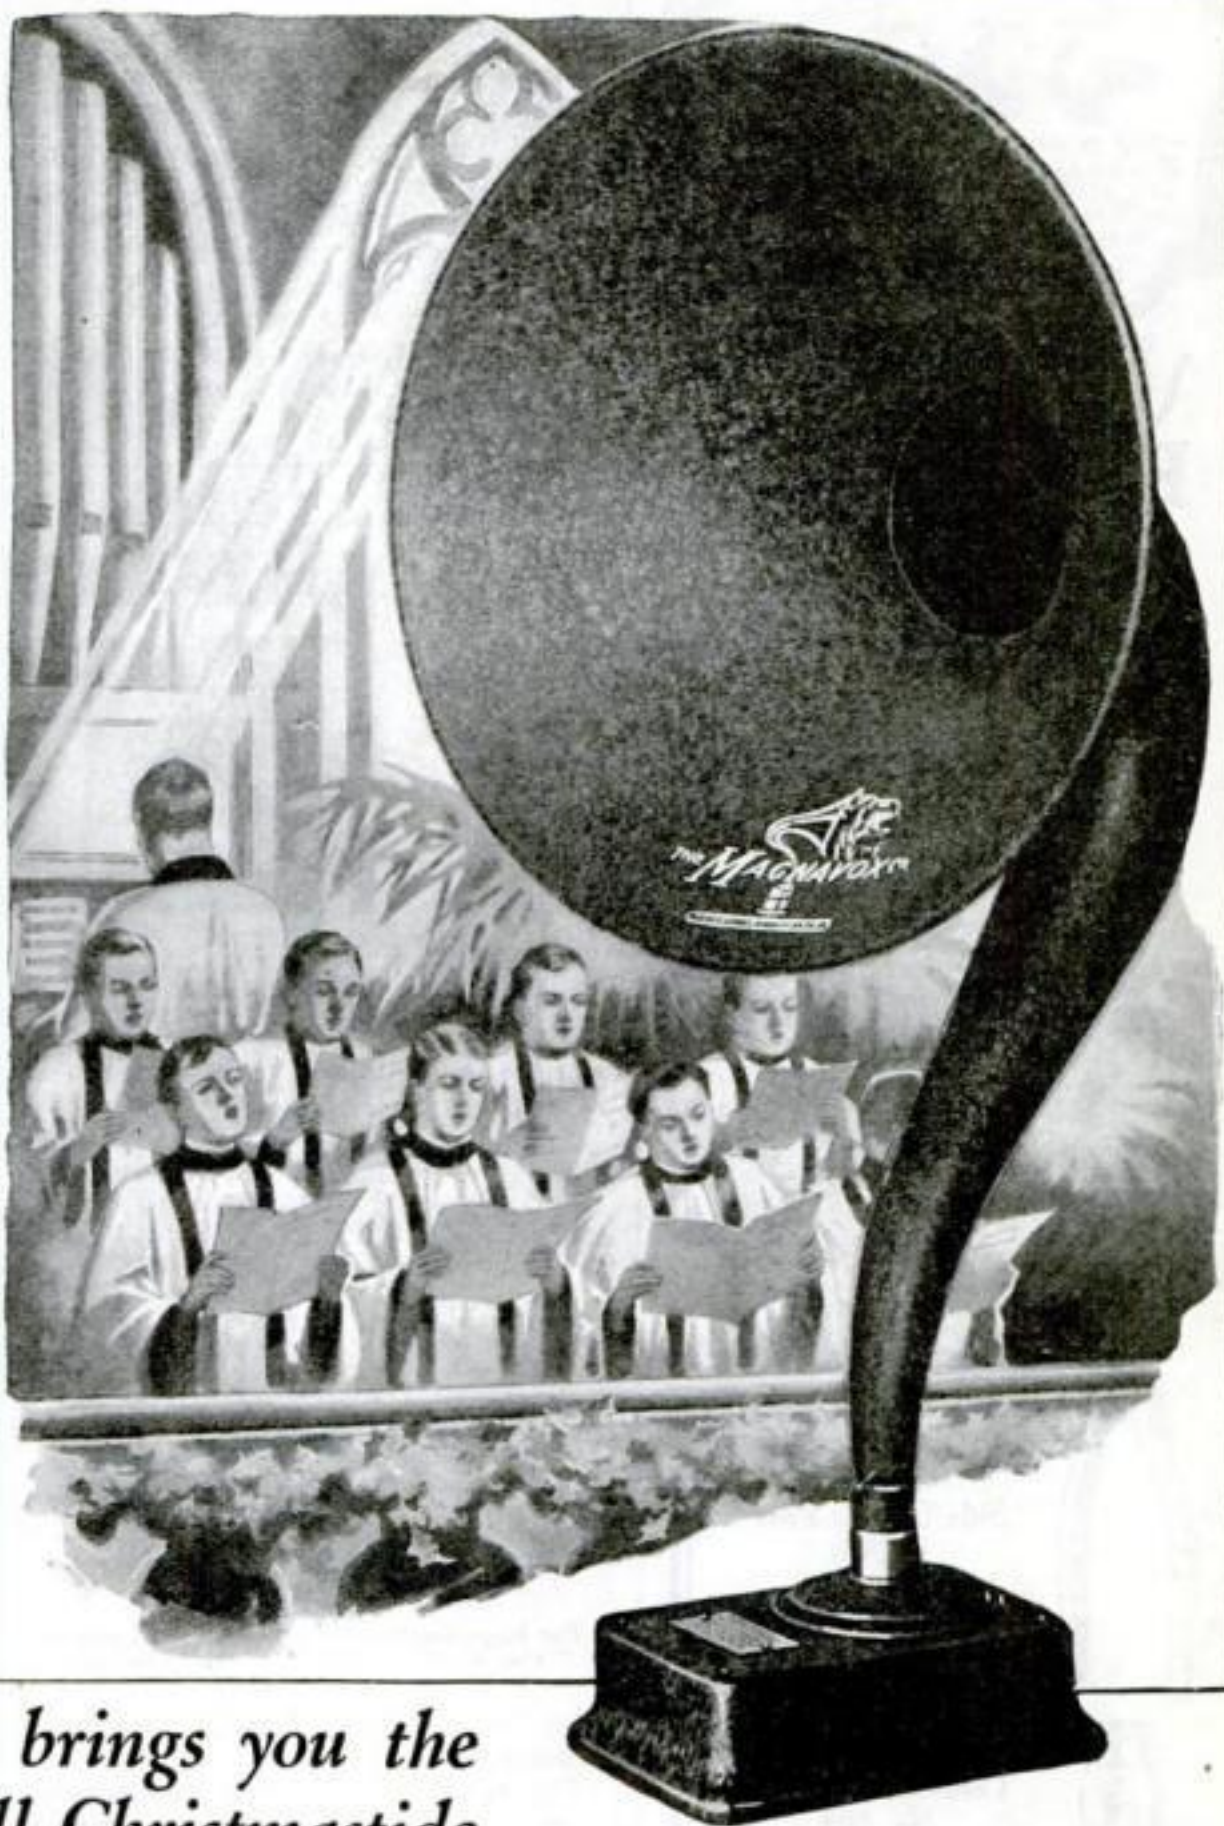

Magnavox brings you the Voice of All Christmastide

THE Art of Radio Reproduction is enjoyed by every Magnavox owner. Despite the ever-increasing quality and variety of Broadcast Programs, many a receiving set gathers dust unlamented because of insufficient sensitivity or an unsatisfactory "loudspeaker."

Every Magnavox owner is a master of the art of radio reproduction—the results obtained by the use of Magnavox Reproducers and Power Amplifiers cannot be equalled with apparatus constructed in the ordinary way.

The special attention of dry battery receiving set owners is called to the new Magnavox Reproducer M1, illustrated above.

Magnavox Products can be had of good dealers everywhere.

THE MAGNAVOX COMPANY
Oakland, Calif.

New York Office—370 Seventh Avenue
Perkins Electric Limited—Canadian Distributors
Toronto, Montreal, Winnipeg

MAGNAVOX PRODUCTS

There is a Magnavox for every receiving set

Hello Boys! **ERECTOR**

BUILDS LOTS OF TOYS


BOYS make wonderful models of bridges, cranes, derricks, wind-mills, skyscrapers, railroad signals, Ferris Wheels and machinery. Erector is not only the best fun in the world but it is splendid training.

This famous Construction Toy will delight any boy this Christmas

ERECTOR is the only actual structural steel toy. Every part is scientifically proportioned and correct in design. The boy who owns Erector or any other Gilbert Toy is made a member of Gilbert Engineering Institute for Boys, without cost. He can win valuable prizes, degrees and diplomas in this great Fraternity of American Boys.

THE A. C. GILBERT COMPANY
222 Blatchley Avenue, New Haven Conn.

Gilbert Erector is the only steel Construction Toy that builds square Girders

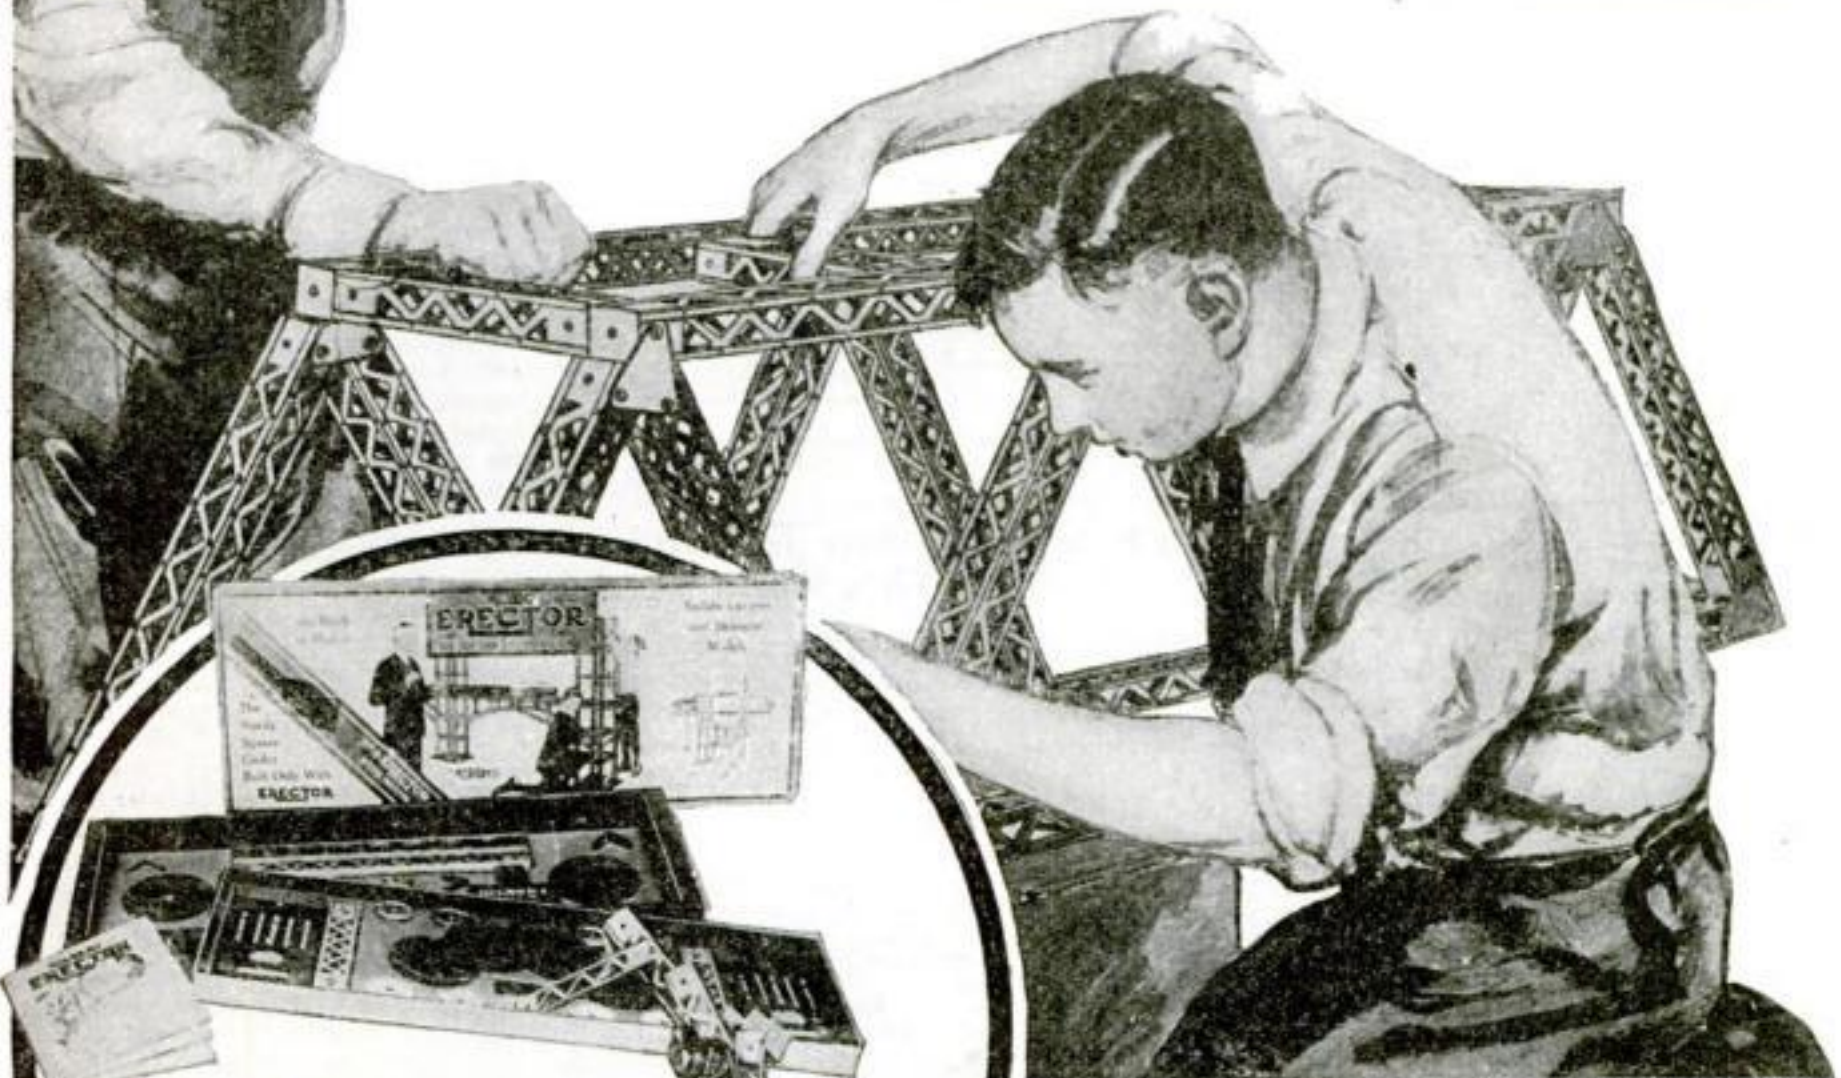

\$5

**Gilbert
Erector No. 4**

THE most popular set. In addition to hundreds of parts it contains a sturdy Electric motor to operate cranes, draw bridges and machinery models.

THE A. C. GILBERT CO.
222 Blatchley Avenue, New Haven, Conn.

Send 10c to-day for Gilbert Year Book for 1924. Chock full of interesting articles for boys, chemical experiments, athletic sports, tricks, useful items any boy can make, story of great engineering feats, etc., as well as a complete catalogue of the many Gilbert Toys. Enclosed find 10c. Send me Gilbert Year Book for 1924.

Name

Address

City State.....



In Gift Boxes

Almost any man or boy will be glad to get a "YANKEE" Tool for Christmas; and it is exactly the gift to make a mechanic happy.

For quick screw-driving, a man needs the "YANKEE" Spiral Ratchet Screw-driver No. 30. (Illustrated.)

To bore holes he wants a "YANKEE" Automatic Push Drill No. 41.

For work on his car give the motorist a "YANKEE" Ratchet Breast Drill No. 1555. Makes easy work of jobs that other drilling tools won't do.

Does he build radio sets? "YANKEE" Ratchet Hand Drill No. 1530 is just the tool he needs.

Anybody who works at a bench will value a "YANKEE" Vise No. 1992. Swivel base.

Then there is the "YANKEE" Tool Set No. 100—a full set of screw-driving tools, with attachments for drilling, etc. Solid oak case.

See the "YANKEE" Tools in Christmas Boxes, at your hardware dealer's. He will help you in your selection.

"Yankee" Tool Book sent free on request.

NORTH BROS. MFG. CO., Philadelphia, U. S. A.

"YANKEE" TOOLS

Make Better Mechanics

Making a Height Gage Base for a Vernier Caliper



A SUBSTITUTE for a Vernier height gage, which is one of the more expensive small tools in the shop, can be made from a Vernier caliper. All that is

necessary is a firm base and a scratch blade.

The base is tool steel, hardened and ground. Its length should be proportioned to the

size of the caliper jaws to insure stability. The base is fixed to the stationary jaw of the caliper with a tapering clamp, as shown. The screw that draws down the clamp must be located exactly in the center of the base.


The scratch is clamped to the movable jaw with the point projecting well beyond the end of the base.

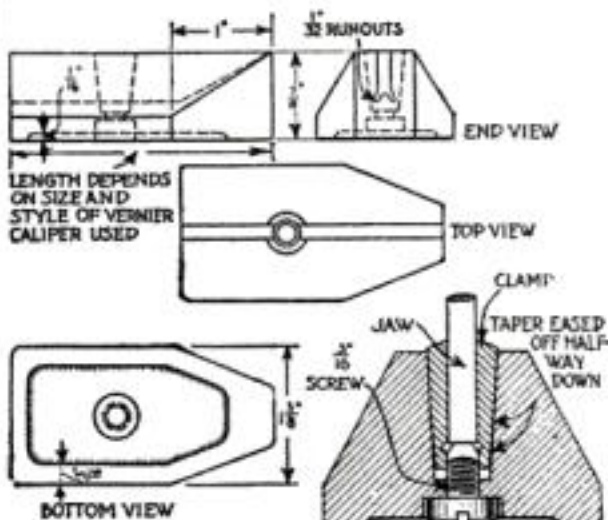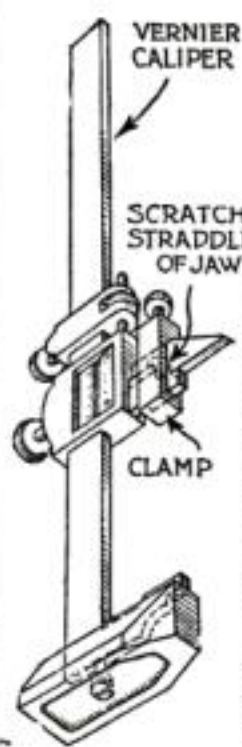

How the scratch point and base are made and attached to an ordinary Vernier caliper

Flat Face Vise Fixture Is Useful in Filing Thin Work

IN FILING thin parts of brass or steel, the vise fixture illustrated, which is used by a Washington, D. C., mechanic, is a distinct aid. It is simply a flat steel plate, with a vertical extension to be gripped in the vise jaws. Several deep-

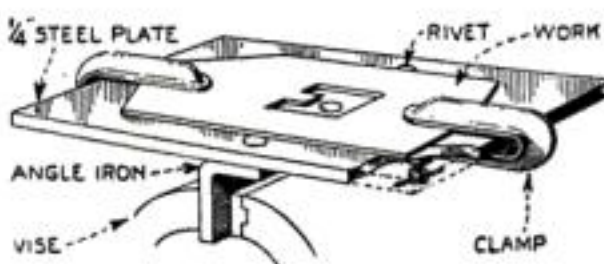

The work is fastened with C clamps to a table held in the vise

throated C clamps are used for fastening the work to the face of the rest. The work is turned about as required to finish any part of the face either by shifting the clamps or turning the vise about, if the base is of the swivel type. A good size for the flat plate for average use is 6 by 10 in.

Pieces - per - Hour Tell You Straight

Are you getting *ahead* with the practical development of your machine?


Are you getting larger *production* with each change in design or working adjustment?

Is the operator of the machine getting *his* methods down fine?

Your answer lies in the number of *pieces per hour*—recorded always reliably by a

Veeder COUNTER

The Set-Back Rotary Ratchet Counter below is for machines such as presses and metal-stamping machines, where a *reciprocating* movement indicates an operation.

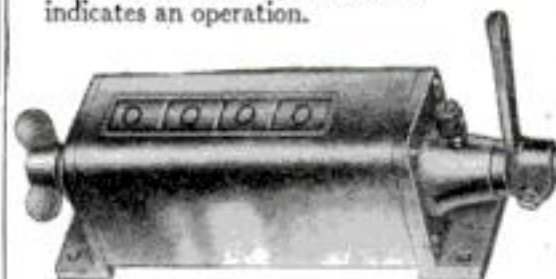

Registers one for each throw of the lever and sets back to zero from any figure by turning knob once round. Supplied with from four to ten figure-wheels, as required. Price with four figures, as illustrated, \$11.50—subject to discount. (Cut less than 1/2 size.) Set-back Revolution Counter of similar model, \$10.00 (list).

This small Rotary Ratchet Counter

(No. 6) counts reciprocating movements of the lever, as required for recording

the output of innumerable small machines. When the lever is moved through an angle of 40 to 60 degrees, the counter registers one. The further the

lever is moved, the higher the number registered. A complete revolution of the lever registers ten. This counter can be adapted to no end of counting purposes, by regulating the throw of the lever. Price, \$2.00. (Cut nearly full size.) Small Revolution Counter, also \$2.00.

Everything you could ask in a counting device is shown in the 80-page Veeder booklet. Ask for this fine free book.

The Veeder Mfg. Co.,
44 Sargeant St., Hartford, Conn.

How three boys built a railroad

THREE boys sat disconsolately on the edge of the pond back of the old mill on the Jenkins' place. All week they had been building a railroad in the sand along the banks. They had leveled, and dug, and built up until they had the bed laid for a whole transportation system. There were grade crossings, and bridges and freight yards and even a tunnel. While along the edge of the pond Wally had built docks and ferry boat slips. But as Bob said, "What good is a railroad without any cars?"

"Why all the gloom, men?" said a pleasant voice behind them. The three boys looked up to see Mr. Jenkins, Bill's father.

Bill explained the lack of "rolling stock" for their railroad.

"Well!" said Mr. Jenkins, "Why don't you fellows chip in and get track and trains? In New York, I've seen some beauties that operated by electricity. They were exact duplicates of the big ones that run on the Central."

"Chip in?" asked Wally, showing empty pockets, "Chip in what?"

"My golly!" said Mr. Jenkins. "Anybody'd think you fellows were cripples. When I was a boy, if I wanted anything bad enough, I just went out and earned the money and got it. I know Bob there could make some money if he'd saw that big pile of wood I saw yesterday out in the back of his Dad's place. Wally can pick the apples down in the orchard and I'll find something for Bill to do. Get busy and see what you can earn. And then I'll tell you what I'll do! I'll give you a dollar for every dollar you earn. How's that, fair enough?"

"Oh boy!" Bob cried.

"Let's see that orchard," said Wally.

"Let's go!" shouted Bill, getting up in a hurry.

First meeting of the R. W. & W.

A MONTH later, the first meeting of the R. W. & W. Railroad (R—Robert, W—William, W—Walter) was held. Mr. Jenkins collected the money the boys had earned for the railroad.

Wally had seven dollars, Bill eight and Bob ten.

"That makes twenty-five dollars," announced Mr. Jenkins. "And now, as I said I would, I'll match your capital with the same amount." He took two new ten dollar bills and a five from his pocket and put them with the boys' money. "Total capital of the Railroad—fifty dollars."

"And now, gentlemen, if you three will meet me tomorrow morning early, we'll all go into New York on the eight o'clock and purchase 'rolling stock' for the railroad."

They buy "rolling stock"

WHAT A day those four had in the city!

On November 30th, at 8:30 P. M., Mr. H. C. Ives will give radio talk. "The Fun of Playing with Trains," Station W. E. A. F., wave length, 492 meters.



Mr. Jenkins took the three boys down to the Ives Display Room in the Fifth Avenue Building at Madison Square.

On great tables, which ran all around the big display room, were complete railroad systems. Powerful electric engines, perfect models of their big brothers on the Central, thundered along with mail coaches and Pullmans. A freight engine rumbled by, pulling a long line of flat cars, tank cars, and cattle cars, and in the rear a caboose. The boys looked on wide-eyed and noticed that each car was a perfect model of the real thing, even down to the monograms on the cars, which showed the cross of the Santa Fe, the seal of the N. Y. C. & H. R., the red and white circle of the Canadian Pacific.

There were semaphore signals, which showed red and green lights. Crossing signals that rang a warning bell as the Flyer approached. Trestle bridges, tunnels, freight and passenger stations, telegraph poles and street lights. In fact everything that you have ever seen in a big railroad.

There was a shriek from Wally.

"Oh boy! Look at these." He had found a big table on which were ocean liners, freight steamers, submarines, tug boats and racing yachts. "Gee! Couldn't we have some ships, too?"

"How about it, boys," suggested Mr. Jenkins, "couldn't we make Wally Captain of the Port and let him handle the ocean transportation?"

Everyone agreed to this and Wally, with the professional eye of a sea captain, picked out a liner, a tug boat for hauling freight, and a diving submarine for harbor defense.

The grand opening

A WEEK later, down behind the old mill, there was a scene of tense excitement.

Lined up on the bank were Mr. and Mrs. Jenkins, Molly—Bill's little sister. Ambrose—the colored man who cut their lawns, and Rags, the dog. Bob knelt on the ground beside a switch. Wally fussed with the mooring ropes of a liner which rode proudly beside her pier. Bill fastened an American flag to the halyards on a pole. All along the bank, ran the new railroad's tracks, gleaming in the sun. The semaphore signals showed "Clear track ahead."

"Ready!" cried Bob.

"Ready!" answered Wally and Bill.

Rags barked. Mr. Jenkins waved his hat and Mrs. Jenkins her parasol. Ambrose clapped. Molly shrieked.

Then Bob turned the switch and out of the door of the old mill rolled the Flyer, headlight gleaming, parlor cars lighted. Along the bank it flew, round curves, through tunnels, over bridges. Then came a long freight loaded with lumber and gravel for "overseas." Down to the water front it went and there stopped alongside a pier.

"How about the R. W. & W?" shouted Bob.

"Yea!" hollered Bill and Wally and Mr. Jenkins and Ambrose.

Suddenly little Molly began to cry as though her heart would break.

"Why, dear, what's the matter?" asked Mrs. Jenkins.

"I wish I was a boy," sobbed Molly.

And after all you couldn't blame her much—could you?

THE IVES MANUFACTURING CORP.	
205 Holland Ave.	Bridgeport, Conn.
I enclose 10c for which please send me your new smashing 28-page book that shows how to build an Ives Railroad. This book will also tell me about the Ives Fleet of boats.	
Name
Address
City	State



The hardest work needs

MOSSBERG

Chrome Manganese Steel

Wrenches & Tools

DON'T send a boy to do a man's work—or an inferior wrench to tackle a nut or bolt that's hard to handle. Make sure that the wrench or tool you select for that difficult job is a Mossberg.

Each Mossberg Wrench is designed and built for a particular job—and the Mossberg idea is to have that wrench do the job a little better than any other. Hence the use of chrome manganese steel throughout the entire line—the one piece, solid construction of the majority of Mossberg Wrenches—the exclusive designs.

Ask your dealer to show you Set No. 1900—three socket wrenches with twelve openings. Note the rugged construction of these wrenches—they are typical of the Mossberg line, in economy, strength and simplicity.



"Four-Way"
Socket Set

FRANK MOSSBERG CO.
Lamb Street, Attleboro, Mass.

The Home Workshop, Continued

How to Rebuild a Broken-Down Car

By Ray F. Kuns


Principal, Automobile Trade School
Cincinnati, Ohio

THE frame of the old car again is suspended from the springs. The wheels are again on the axles. The transmission system is installed again on its bearings, and the engine, separated into its component parts, is lying on the bench.

Before reassembling the motor, look carefully at each part. Allow no worn bearings, bent valve stems or other defective elements to escape your attention.

First of all, get a new set of gaskets to replace the old ones. Look at the oil lines and the oil pump to see that there are no obstructions. Then replace the valves, taking care that they are put into the block in the same order in which they were removed previous to grinding. The intake valves must fit the guide well in order that there will not be any leaking of air into the cylinders. The valve guides should be inspected and repaired, if they are found too loose.

Now for the pistons. If you have had to rebores any of the cylinders, make careful measurements of the new diameter. Piston rings about .005 in. oversize should be selected and at least the two top rings should be replaced, for heat and wear undoubtedly have reduced the tension of

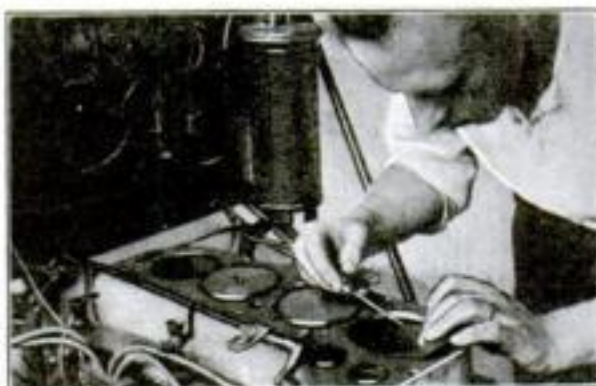

Testing clearance with a feeler gage while fitting piston ring into place

the old rings. Be sure that all parts are covered with a film of oil before being replaced.

Broken or worn valve lifters should be replaced with new ones, as they might become a source of much trouble. If the valve has worn a hole in the top of the adjusting screw, reface the screw on a grinder so that measurements with an adjusting gage can be made.

An important point to remember is that the timing gears must be replaced in a definite position. If you have followed the directions previously given, you will have the gear marked. The flywheel markings will assist in checking the setting of the timing gears.

You will now have the engine complete and set in the frame. The next step will be the addition of the accessories.

Inspect the carburetor float for leaks by placing it in boiling water. A hole will be easily discernible. If there is some liquid within, punch two holes in the



Ready for the Road

This is the last of three articles telling how Mr. Kuns rebuilt the 1918 roadster six shown above. It cost \$75 and the materials for repairing it, including paint, top, and tires, totaled \$135

float, drain off the gasoline, and solder the holes shut. A cork float, if very old, may have become soggy. Test its floating qualities before putting it back in the carburetor.

The vacuum tank float must be examined in the same way. Scale will sometimes form at the bottom of the tank and dirt may lie loosely near the outlet. After cleaning the parts and seeing that the valves work easily, assemble the tank, being sure that the gasket is good and the tank airtight.

Wash out and clean thoroughly all gasoline lines and the main supply tank. Run a fine wire through all small nozzles and passages to remove any obstructions that might be there.

The gasoline system should then be clean from tank to cylinder. Put it together and start on the ignition system. Dismantle the generator and inspect the wiring and other visible parts. See that the brushes are in good condition and



The engine partially reassembled after the worn parts have been replaced and the whole thoroughly overhauled

replace any that are not good. In making replacements, be sure that you sand them in to fit the surface. See that the insulation is not worn out at any point. A bit of tape added here and there will help.

It may be necessary to remove the commutator, turn it on a lathe, and cut the mica between the segments down 1/32 in. below the surface to prevent the brushes from riding on them. This can be done with a hacksaw blade. Then

(Turn to page 102)



The Merriest Christmas of All—



Lionel "Multivolt" Transformers

give unlimited power at very little cost. They are best for operating Lionel Trains. Safe—efficient—economical.

*Insist on Lionel
Accept No Substitute*

BRIGHT and early Christmas morning you and your boy will be running his Lionel Train, enjoying the thrills of the world's most fascinating and educational toy.

Lionel Trains and Miniature Railroad Equipment are exact reproductions of those used on America's leading railroad systems.

Lionel Locomotives are powerful enough to haul a train of twenty or more cars around curves, through tunnels, over bridges and across switches.

The realistic Lionel equipment includes Crossing Gates that automatically lower as the train approaches and raise as it passes by. Electric Block Signals flash "Danger" and "Clear Track Ahead," while Electric Warning Signals ring at the crossings.

All Lionel Locomotives, Cars and Accessories are of steel construction

and practically indestructible.

For 23 years Lionel Electric Trains have been electrically and mechanically perfect and fully guaranteed. They are attractively finished in rich enamels and baked like automobile bodies.

You can buy a Lionel Electric Train Outfit for as low as \$5.75. Or your boy can start his Lionel Railroad System with a larger locomotive and track and add to it. A Lionel Outfit is good for years and years of fun and happiness so there is real economy in buying it.

Lionel Trains can be operated from any light socket with a Lionel "Multivolt" Transformer—or from dry cells or storage batteries.

You can see Lionel Trains in operation at the best toy, hardware, electrical, sporting goods and department stores.

Send for the new 48-page Lionel catalogue—a handsome book showing the complete line in colors. It's free.




THE LIONEL CORPORATION

48-52 East 21st Street Dept. 15 New York City

"Standard of the World" Since 1900

LIONEL ELECTRIC TOY TRAINS

& Multivolt Transformers

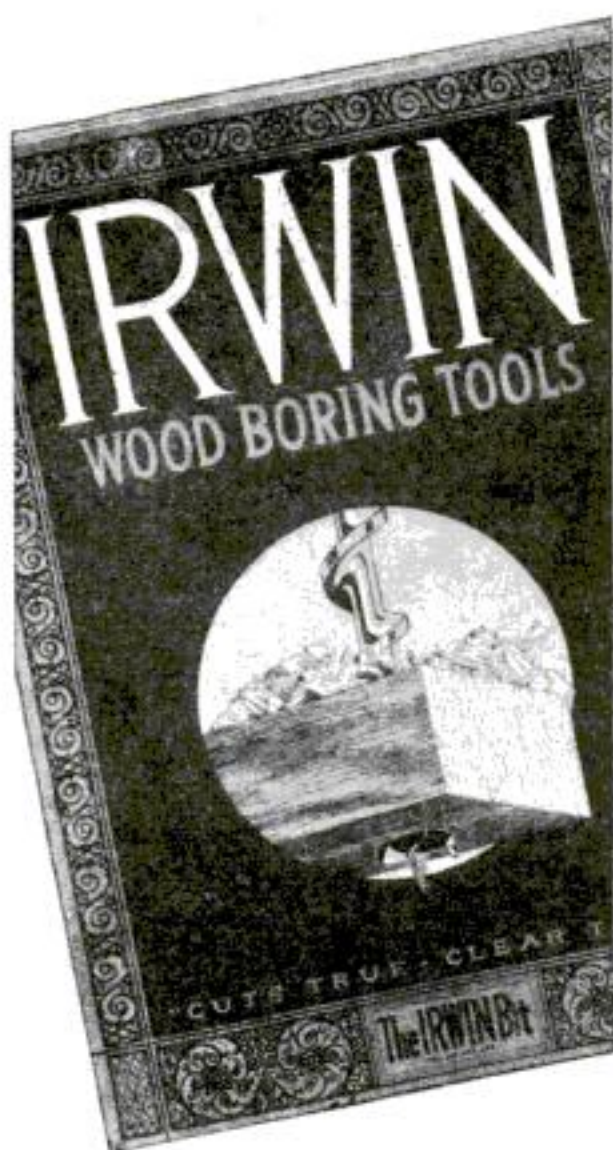

"the best book I've ever read on wood boring tools"

"It contains the very information I've often wanted, but didn't know where to get. Your complete description of bits and augers and the simple explanation of how and why they "bore," have made plain to me the reasons for the birth of the Bor Family."

The above is only one of the many unusual comments received on our new catalog. In fact, it is more than a catalog—it is a practical working manual on the selection, use and care of bits and augers. If you haven't a copy, write today, giving name and address of your hardware dealer.

To Hardware Dealers: You, too, should have a copy of this book. If you haven't received it, send us your name today.

Address Dept. 112

The Irwin Auger Bit Co.,
Wilmington, Ohio

Originators and sole manufacturers for more than 30 years, of the Genuine Irwin Bits and Augers.

The IRWIN Bit
Reg. U.S. Pat. Office

How to Rebuild an Old Car

(Continued from page 100)

see that all bearings are in good condition and put in a good supply of grease and oil before reassembling the generator.

Test the generator with a battery to see whether it will run as a motor. If this works, it is reasonable to assume that it will work as a generator. When running on the engine, the third brush can be set and other regulations made so that an amperage of from 10 to 14 is obtained on a 6-volt system and from 5 to 7 on a 12-volt system. In the same way inspect and repair the starting motor, but do not undercut the commutator.

If the ignition is of the battery type, inspect the distributor, coils, and other parts, testing each carefully. New points



The carburetor taken apart, cleaned and inspected, ready for reassembling

are frequently necessary on the distributor, but if they are only pitted, they may be honed or ground down to a new and true seat. It is well to renew all high and low tension wires, as the added expense is negligible as compared with the increased efficiency of the system.


If a magneto is in use as a source of ignition, it should be completely dismantled and all brushes and moving parts carefully checked. The points on the breaker mechanism of the magneto are platinum and very expensive. They are also softer than the tungsten used in battery distributors and are easily filed to a new seat.

Test the reassembled unit to see that it will generate properly. To do this, run a wire about the terminal screws on the distributor board and back to within $\frac{1}{4}$ in. of the frame of the magneto. When twirling the rotor by hand, a spark of sufficient intensity to jump the gap should be produced.

Now connect all wires from generator or magneto to spark plugs and call the ignition system finished, for the battery is something that cannot well be repaired at home. It should be sent to a battery shop for recharging before being installed in the car.

The water pump, as a rule, does not require much attention, excepting that

(Turn to page 103)

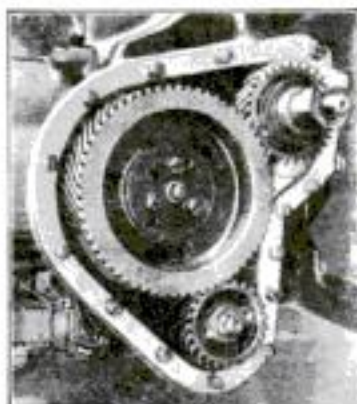

The engine timing gears

Coal too High? Science Says "Burn Free Air"

New Discoveries Make it Easy to Keep Homes Warm in Coldest Weather

No more paying exorbitant prices for coal. No more hauling and chopping wood. No more shivering in wintry weather waiting for fire to be built. Wonderful new device Nu-Heat takes one part of coal oil, or kerosene (the cheapest fuel known) and combines it with twenty parts of air (the only FREE fuel). Makes a cheaper gas than city gas. Gives intensely hot, cheerful flame almost instantly. Warms the largest rooms on "blizzardy" mornings in a few minutes.

A Warm House as Soon as You Arise—Cuts Housework 1/2
AT TWIST OF WRIST—
FIRE READY IN FEW SECONDS
ROOMS WARM IN 5 MINUTES

Good, steady heat for perfect baking. Fits any stove, range or furnace. Stop handling coal and wood and cleaning out ashes, dirt, dust and soot. Government Experts and Domestic Scientists advise everyone to burn Nu-Gas.

AGENTS

Make \$50 to \$200 a week. Full or spare time. Personal cooperation. Free sample case offer. Write quick for exclusive territory.

Absolutely safe. Ironclad guarantee, 30 days' free trial. Stop burning coal—burn free air. Stop building fires—HAVE one in few seconds. Write for free information today. Mention if you have range, heater, furnace.

Wade Hill Mfg. Co.
Dept. 241 St. Louis, Mo.

Statement of the Ownership, Management, Circulation, etc., required by the Act of Congress of August 24, 1912, of Popular Science Monthly, published monthly at New York, N. Y., for October 1, 1923, State of New York, County of New York, ss. Before me, a notary public, in and for the State and county aforesaid, personally appeared O. B. Capen, who, having been duly sworn according to law, deposes and says that he is the Business Manager of Popular Science Monthly and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, embodied in Section 443, Postal Laws and Regulations, printed on the reverse of this form to wit:

1. That the names and addresses of the publisher, editor, managing editor, and business managers are: Publisher, The Modern Publishing Company, Inc., 225 West Thirty-ninth Street, New York, N. Y. Editor, Sumner N. Blossom, 225 West Thirty-ninth Street, New York, N. Y. Managing Editor, Sumner N. Blossom, 225 West Thirty-ninth Street, New York, N. Y. Business Manager, O. B. Capen, 225 West Thirty-ninth Street, New York, N. Y. 2. That the owners are: The Popular Science Publishing Company, Inc., 225 West Thirty-ninth Street, New York, N. Y. Stockholders of Popular Science Publishing Company, Inc., Henry J. Fisher, 22 William Street, New York, N. Y.; Oliver B. Capen, 225 West Thirty-ninth Street, New York, N. Y.; Robert Cade Wilson, 683 Springfield Avenue, Summit, N. J.; George B. Agnew, 22 William Street, New York, N. Y.; Susan D. Bliss, 22 William Street, New York, N. Y. 3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of the total amount of bonds, mortgages, or other securities are: none. 4. That the two paragraphs next above, giving the names of the owners, stockholders and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company, but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

(Signed) O. B. CAPEN, Business Manager.

Sworn to and subscribed before me this 19th day of September, 1923.

Paul M. Bone,

(Seal) My Commission expires March 31, 1924.

SPORT BODIES for FORD and CHEV. 499 at \$34.50 UP

Life-size paper patterns—You can build your own body at a small cost! We are manufacturers and our quantity production enables us to quote exceptional low prices. Our unique shipping methods save you 75% in FREIGHT CHARGES. Send at once for free particulars on Central Bodies. Our Book: "HOW TO BUILD A FORD RACER" sent anywhere on receipt of 25c in cash or stamps. WRITE TODAY!

CENTRAL AUTO SUPPLY CO., Dept. 122, Louisville, Ky.

Making Toys for Christmas

(Continued from page 79)

finishing, as the enamel should be of a kind that can stand considerable rough handling and washing. If a first class enamel of the color desired cannot easily be obtained, get a good white or cream enamel, and tint it with artist's oil color in tubes, which can be obtained in any color.

The checkerboard should be laid out in pencil on the tray top or bottom, the latter being better if the table is to be used only occasionally for games. Make it 12 in. square and color the squares alternately red and black with a reliable oil paint.

The toy garage is a boy's toy. It can be used either as an independent plaything or regarded as an addition to a doll's house, if the children have one. It is intended as a companion piece to the doll's house described in the Home Workshop a year ago, and detailed in Home Workshop Blueprint No. 14.

Wood strips and wallboard are used in building the garage. It is 18 in. wide, 20 in. long, and 18 in. high. The sides are $12\frac{1}{2}$ by $19\frac{1}{2}$ in. wallboard, and the front and back 18 by 18 in. The corner posts are $1\frac{1}{8}$ by $1\frac{1}{8}$ by $12\frac{1}{2}$ in.; there are 14 rafters $\frac{3}{4}$ by $\frac{3}{4}$ by $10\frac{3}{4}$ in. and a crown $\frac{1}{8}$ by $1\frac{1}{4}$ by 23 in. The front doors are two pieces of wallboard 3 by 10 in., and the side door is $3\frac{1}{2}$ by 6 in. Small strips of $\frac{1}{4}$ -in. stock form the trim for the garage and doors.

How to Finish the Garage

The garage should be neatly painted and the trim picked out in appropriate harmonizing or contrasting colors.

To furnish the garage with a toy auto, use one of the larger and better commercial toy cars or carve a body from soft wood and fit it with four wheels and a "spare."

The little wheelbarrow is a toy for the smaller children, very easy to make when the pattern for the sides is laid out. Painted up realistically, it makes a pretty toy. At the same time it has all the advantages of a regular wheelbarrow from the standpoint of the small boy, who likes nothing better than to cart his possessions around from place to place.

The sides are cut with a compass or keyhole saw (or a fret-, band-, or jigsaw, if available) from pieces $\frac{3}{4}$ by 10 or 12 by $30\frac{3}{4}$ in. The bottom is $\frac{1}{8}$ by $9\frac{3}{4}$ by $12\frac{1}{4}$ in.; the headboard $\frac{1}{8}$ by $6\frac{1}{2}$ by $8\frac{1}{2}$ in.; and the tailboard $\frac{3}{4}$ by $2\frac{1}{2}$ by 12 in. The axle is $1\frac{1}{2}$ by $1\frac{1}{2}$ by $9\frac{1}{2}$ in. and should be of hard wood. The wheels are $\frac{1}{8}$ in. thick and 8 in. in diameter. Two iron rods about $\frac{5}{16}$ in. in diameter and 10 in. long, with nuts, hold the head together, and one rod $14\frac{1}{2}$ in. long, the tail.

Full working details and complete lists of materials for all three toys are contained in POPULAR SCIENCE MONTHLY's Blueprint No. 29. This can be obtained from the Blueprint Service Department, POPULAR SCIENCE MONTHLY, 225 West 39th Street, New York, for 25 cents. A complete list of blueprints previously issued is printed on another page.



The size you want— the insulation you need

YOU don't need to wait while your panel is cut to order when you get ready to build your radio set. Just go to your dealer and ask for a Celoron Radio Panel. He will give you, without a moment's delay, the exact size you want. And—what is more important—you get the proper insulation for successful results in radio receiving.

Celoron is recognized by radio experts as the best material for insulation purposes. Its high dielectric strength makes it the ideal panel material.

Used by leading manufacturers

Many of the leading manufacturers of radio equipment use Celoron in making their standard parts. It is approved by the U. S. Navy Department Bureau of Engineering and the U. S. Signal Corps.

Celoron Radio Panels come ready-cut in eight standard sizes, selected to meet the needs of the set-builder. Each panel is neatly wrapped in glassine paper to protect the handsome surface.

Celoron panels are readily worked with ordinary tools at home. They are easy to machine, saw, drill, and tap.

Ask a radio dealer for one of the following standard sizes:

- | | |
|---------------------------|----------------------------|
| 1—6 x 7 x $\frac{1}{8}$ | 5—7 x 18 x $\frac{3}{16}$ |
| 2—7 x 9 x $\frac{1}{4}$ | 6—7 x 21 x $\frac{3}{16}$ |
| 3—7 x 12 x $\frac{1}{8}$ | 7—7 x 24 x $\frac{3}{16}$ |
| 4—7 x 14 x $\frac{3}{16}$ | 8—12 x 18 x $\frac{3}{16}$ |

We also furnish Celoron in full sized sheets and in tubes, and can cut panels in special sizes when desired. If your dealer hasn't yet stocked Celoron panels, ask him to order for you, or write direct to us, indicating by number the size you want.

Send for free booklet

"Tuning In On a New World" is the title of a booklet we have prepared especially for the radio fan. It contains a list of the leading broadcasting stations in the United States and Canada, an explanation of symbols used in radio diagrams, and several popular radio hook-ups. This booklet will be sent without charge, on request.

To radio dealers: Write for special dealer price list showing standard assortments

Diamond State Fibre Company

BRIDGEPORT

(near Philadelphia)

PENNSYLVANIA

BRANCH FACTORIES AND WAREHOUSES

BOSTON

CHICAGO

SAN FRANCISCO

Offices in Principal Cities

In Canada: Diamond State Fibre Company of Canada, Limited, 245 Carlaw Avenue, Toronto

CONDENSITE CELORON STANDARD RADIO PANEL

Deafness



Perfect hearing is now being restored in every condition of deafness or defective hearing from causes such as Catarrhal Deafness, Relaxed or Sunken Drums, Thickened Drums, Roaring and Hissing Sounds, Perforated, Wholly or Partially Destroyed Drums, Discharge from Ears, etc.

Wilson Common-Sense Ear Drums

"Little Wireless Phones for the Ears" require no medicine but effectively replace what is lacking or defective in the natural ear drums. They are simple devices, which the wearer easily fits into the ears where they are invisible. Soft, safe and comfortable.

Write today for our 168 page FREE book on DEAFNESS, giving you full particulars and testimonials.

WILSON EAR DRUM CO., Incorporated, LOUISVILLE, KY.
335 Inter-Southern Bldg.

60% of Market Price Hundreds of Diamonds



This 1.2-5.32 Ct. sparkling diamond solitaire of fiery radiance at \$22.65. Also hundreds of equally amazing money-saving offers in latest Diamond Bargain Bulletin. This 75 year, oldest, largest Diamond Bargain firm in all the world lends money on diamonds. Thousands of unpaid loans and other bargains. (Must sell NOW.)

Why Pay Full Prices

Costs Nothing to See. Investigate this offer: Any diamond sent for absolutely Free Examination at our risk. No obligation. No cost to you.

LOAN LIST FREE—Send Now

Latest bulletin includes Unpaid Loans—sent free. Describes Diamond Bargains in detail, gives guaranteed cash loan values. Explains price paid unlimited exchange privilege. Send today for Diamond Bargain Bulletin. No obligation. Edition Limited—Write Now. Postal card will do.

Jos. DeRoy & Sons 4715 DeRoy Building Only Opposite Post Office Pittsburgh, Pa.

\$1.00 DOWN Brings Your Choice 10 Months to Pay



Use Your Credit Choose Your Xmas Gifts From Sweet's Deluxe Diamond Book

\$1.00 Brings
Your Choice—
10 Months to
Pay

Just think!—\$1.00 brings any article you select for examination. Buy a worth-while token on our FRIENDLY CREDIT TERMS at less than cash prices. \$1.00 at Sweet's does the work of \$5 elsewhere! When you have convinced yourself that the article you have selected is exceptional value, keep it and pay only 1/5th of the price. 10 MONTHS NEXT YEAR TO PAY THE BALANCE.

SPECIAL XMAS SERVICE
Orders shipped promptly. NO RED TAPE—NO DELAY. Guarantee Value Bond with every diamond. All transactions strictly confidential. FREE: A postal brings the Sweet Diamond Book, containing over 3,000 appropriate Xmas gifts. Everything on our generous credit terms. Send for it TODAY to Dept. 473-T.

THE HOUSE OF QUALITY
CAPITAL \$1,000,000.
L.W. SWEET INC.
1650-1660 BROADWAY, NEW YORK

Working Drawings for Useful and Novel Christmas Gifts

BESIDES a large variety of designs for useful Christmas gifts in this month's Home Workshop, you will find some unusually attractive pieces of furniture, toys, and other gifts listed below among POPULAR SCIENCE MONTHLY blueprints. Note particularly the Pullman play table (No. 28) and the toy train, horse, and house (No. 14); the kitchen cabinet work table (No. 27) and the kitchen cabinet (No. 5); the gateleg table (No. 24), the Colonial writing desk (No. 21), the sewing table (No. 1), the smoking cabinet (No. 2), and the two-stage radio receiving set (No. 6).

Having a good drawing or design to work by is half the battle. It will do more to insure success in your home workshop than any other single item. The tendency of many amateur mechanics is to start out to build something with little more than a general idea of the design in their mind or at best a very rough sketch. As a result, there is no efficiency or method in the construction, time is wasted in checking up details that should have been foreseen at the very beginning, and the builder's skill and patience are tried. All this can be avoided by having a fully detailed plan in the beginning and a list of materials.

For any project other than the most elementary, the home worker will find it is best to make a careful drawing and list of materials, or to make use of blueprints such as those in the Home Workshop series.

Complete List of Blueprints

ANY one of the blueprints listed below can be obtained from POPULAR SCIENCE MONTHLY for 25 cents. The Editor will be glad to provide, upon request, information relative to tools, material, or equipment.

Blueprint Service Dept.
Popular Science Monthly
225 West 39th St., New York

GENTLEMEN:

Send me the blueprint, or blueprints, I have checked below, for which I inclose.....cents in stamps or coin:


No.	Title	Price
1.	Sewing Table.....	25c
2.	Smoking Cabinet.....	25c
3.	Book Trough End Table.....	25c
5.	Kitchen Cabinet.....	25c
6.	V. T. Radio Receiving Set.....	25c
8.	Shaving Cabinet.....	25c
9.	Arbor with Gate and Seats.....	25c
10.	Porch Swing.....	25c
11.	Bench and Tilt-Top Table.....	25c
12.	Electric Washing Machine.....	25c
13.	Tea Wagon.....	25c
14.	Toy Train, Horse, and House.....	25c
15.	Home Workshop Bench.....	25c
16.	Inlaid Radio Cabinet.....	25c
17.	Cedar and Mahogany Chest.....	25c
18.	Telephone Table and Stool.....	25c
19.	Grandfather's Clock.....	25c
20.	Flat Top Desk.....	25c
21.	Colonial Writing Desk.....	25c
22.	Girl's Cabinet and Desk.....	25c
23.	Pergola Garage.....	25c
24.	Gateleg Table.....	25c
25.	Sailing Outfit for Canoe.....	25c
26.	Baby's Crib and Play Pen.....	25c
27.	Kitchen Cabinet Work Table.....	25c
28.	Pullman Play Table.....	25c
29.	Toy Tea Cart, Garage, etc.....	25c

Name.....
(Please print)
Street.....
City and State.....



John Davey needs young men

John Davey's organization, The Davey Tree Expert Co., Inc., has a limited number of openings for ambitious young men between 20 and 30 years of age, single men preferred. The opportunity is unusual, offering good pay at the start, permanent employment in the Davey organization, and thorough scientific training in the profession of Tree Surgery. Advancement rapid, according to merit. The work is fascinating, offers chance to travel extensively, and association with fine fellows. Only clean, red-blooded young Americans, lovers of the outdoors, need apply. Write, giving full information to The Davey Tree Expert Co., Inc., 55 City Bank Bldg., Kent, Ohio.

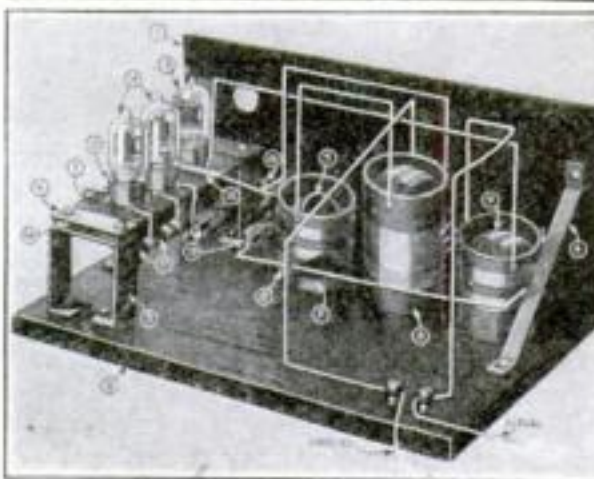

Make Your Own RADIO Receiving Set

Use a blueprint of this two-stage regenerative receiving set with two stages of amplification, which, under favorable conditions, if a long high aerial is used, will receive 500 miles.

The blueprint is easy to understand and contains working drawings, instructions, and bill of materials.

Price 25 cents

Radio Map of the United States

With Dictionary of Broadcasting, Government and Commercial Stations, Call Letters, Wave Lengths, etc.



Price 35 cents

Popular Science Monthly
225 West 39th Street New York City

Using Steam from House Boiler to Heat Water

WHEN a steam-heating plant is used to heat water for the house water system, the usual practice is to place a coil of pipes at one side in the combustion chamber. This is objectionable because in small firepots one side of the water jacket is made less efficient and the coil itself is often in the way when the fire is being stoked. The heating device illustrated was made to avoid these difficulties, and it gives a very quick and hot flow of water.

It is made from ordinary pipe, pipe fittings, and copper tubes. The ends of the large pipe are closed and sufficient tubes are placed in it, as shown, to give

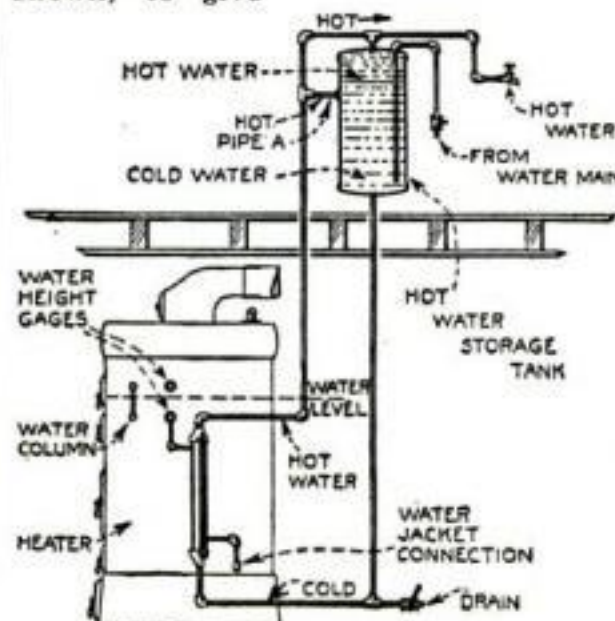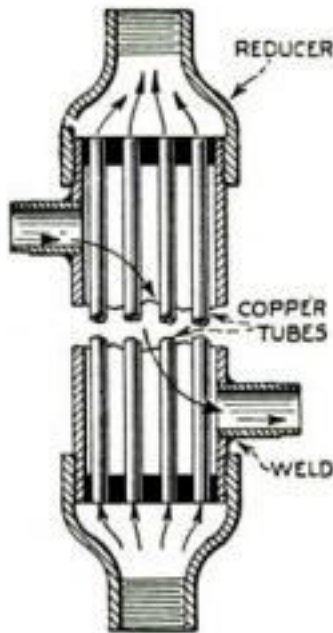

Heating device (above) and general arrangement of the water heating plant (below)

the same area as the area of the outlet pipe. The space around these tubes is connected with the water jacket of the boiler by a short pipe, as indicated. Therefore water at very nearly steam temperature constantly surrounds the copper tubes. Cold water enters the tubes from the bottom and in passing up through them becomes hot.

This heater is connected in the usual way with the storage tank, except that the pipe leading into the tank just above the center is an improvement over the regular method.—PAUL H. BYER.

Capping Tool Handles

A WOODEN tool handle can be fitted easily with a leather cap. Cut off the top squarely to form an even bearing for the leather and then cut a piece of sole leather to suit. Glue this to the top of the handle and fasten with half a dozen shoemaker's tacks. The end of the wood can't come through a handle of this sort, and if carefully made, it will last for years.—B. Y.



Charges Radio and Auto Batteries at Home Over Night - For a Nickel!

For a friend who owns a radio set or automobile, what could be more appropriate than a gift which would eliminate the inconvenience and expense of taking his battery to a service station every time it requires recharging? The

GOLD SEAL
HOMCHARGER
The World's Most Popular
Battery Charger

is such a gift, appropriately dressed up in a beautiful Christmas package, too. It charges any AUTO, RADIO or "B" storage battery in the simplest, quickest and most efficient manner possible. Connects to any lamp socket—operates silently—requires no watching. Fully automatic in operation—absolutely safe.

HOMCHARGER'S TEN POINTS OF SUPERIORITY

1. **Simple**—Only one moving and wearing part, replaceable after thousands of hours use for \$1.00. Will last a lifetime.
2. **Efficient**—Uses less than one-half the current of any bulb or liquid type rectifier. Will charge any radio or automobile battery for a nickel.
3. **Quick**—Its high charging rate of 7 amperes eliminates long waiting for battery to become charged. Will charge any "A" or "B" battery over night, or three times as fast as a 2-ampere machine.
4. **Clean**—No expensive bulbs to break or acids to spill or replace. No acid fumes. Charges without muss, fuss or bother.
5. **Dependable**—Tungsten contacts insure continuous operation—prevent sticking and stopping.
6. **Fool-Proof**—Can be operated by anyone. Attach to lamp socket and connect battery either way, it will always charge. High-grade ammeter eliminates guess work.
7. **Safe**—No danger of shock or fire. Tested and approved by Fire Insurance Underwriters everywhere. Gives tapering charge—will not overheat or injure battery.
8. **Beautiful**—Mahogany and Gold Finish.
9. **Unqualifiedly Guaranteed.**
10. **Popularly Priced**—Retail at \$18.50 complete (\$25.00 Canada). No extras to buy. Sold by all dealers.

FREE BROADCASTING LIST. Ask your dealer or write direct for Free Homcharger List of Broadcasting Stations, and Circular Describing the Gold Seal Homcharger.

DEALERS!

JOBBER!

GOLD SEAL HOMCHARGERS in their attractive Xmas packages are going to be "best sellers" to the holiday trade. Write for our elaborate merchandising plans and then prepare to get your share of this big "Homcharger Xmas business".

Insist on the GOLD SEAL

ACCEPT NO SUBSTITUTE. Like all good products, the HOMCHARGER has been widely imitated. No other charger is just as good. INSIST on seeing our registered trade-mark, the "GOLD SEAL," on nameplate and carton before purchasing.



The Automatic Electrical Devices Co., 131 West Third St., Cincinnati, O.
Largest Manufacturers of Vibrating Rectifiers in the World

Clear Your Skin!

Your Skin Can Be Quickly Cleared of Pimples, Blackheads, Acne Eruptions on the face or body, Barbers Itch, Eczema, Enlarged Pores and Oily or Shiny Skin.

FREE Write today for my FREE BOOKLET, "A CLEAR-TONE SKIN," telling how I cured myself after being afflicted 15 years. \$1000 Cash says I can clear your skin of the above blemishes. E.S. GIVENS, 153 Chemical Bldg., Kansas City, Mo.



We have a wonderful new copyrighted system of teaching note music by mail. To first pupils in each locality we will give free a \$20 superb Violin, Tenor Banjo, Ukulele, Hawaiian-Guitar, Banjo, Mandolin, Banjo-Ukulele, Banjo-Mandolin, Cornet or Banjo-Guitar absolutely free. Also teach Piano and Organ. Very small charge for lessons only. Four lessons will teach you several pieces. Over 100,000 successful players. We guarantee success or no charge. Complete outfit free. Write today, Dept. 148. No obligation. Slingerland School of Music, 1815 Orchard St., Chicago, Ill.



"I'm making real money now"

SEE that coupon? Remember the day you urged me to send it to Scranton? It was the best thing I ever did. "Mr. Carter called me in to-day. Said he'd been watching my work for some time—ever since he learned I was studying with the International Correspondence Schools."

"Then he asked me if I thought I could take over Bill Stevens' job. I told him I was sure that I could—that I had had that goal in view ever since I started my I. C. S. course."

"I start to-morrow, Mary, at an increase of \$60 a month. It's wonderful how spare-time study helps a man to get ahead."

FOR thirty-one years, the I. C. S. has been helping men to win promotion, to earn more money, to get ahead in business and in life.

You, too, can have the position you want in the work you like best. Yes, you can.

All we ask is the chance to prove it. Without cost, without obligation, just mark and mail this coupon.

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7665-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING COURSES

- | | |
|--|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Show Card Lettering |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating |

TECHNICAL AND INDUSTRIAL COURSES

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy <input type="checkbox"/> Mining | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics |

Name.....
Street.....
Address.....
City..... State.....

Occupation.....
Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

Big Value for 10 Cts.

6 Songs, words and music; 25 Pictures Pretty Girls; 40 Ways to Make Money; 1 Joke Book; 1 Book on Love; 1 Magic Book; 1 Book Letter Writing; 1 Dream Book and Fortune Teller; 1 Cook Book; 1 Base Ball Book, gives rules for games; 1 Toy Maker Book; Language of Flowers; 1 Morse Telegraph Alphabet; 12 Chemical Experiments; Magic Age Table; Great North Pole Game; 100 Conundrums; 3 Puzzles; 12 Games; 30 Verses for Autograph Albums. All the above by mail for 10 cts. and 2 cts. postage.

ROYAL SALES CO., Desk 139, South Norfolk, Conn.
HOW TO CONDUCT A RADIO CLUB

E. E. BUSCHER
Covers parliamentary procedure, indoor and outdoor experiments, 5,000 mile receiving sets, vacuum tube amplifiers and detectors and many other subjects.
148 pp. Fully illustrated. Price 75c
POPULAR SCIENCE MONTHLY

225 West 39th Street New York City

Craftsman's Table Lamp Has Art Glass Shade

By James Ellis


THIS table lamp, because of its simplicity of line, displays to unusual advantage an art glass shade. The pedestal and shade frame can be made of mahogany, gum, or any wood that can easily be worked, and they can be put together with very few tools.

If the lumber is bought, a $\frac{1}{8}$ -in. board about 2 ft. long will make all the parts. The base may be cut from a thicker piece or glued up from thin stock. It is chamfered on the upper edges and has a mortise to receive the column and a hole for the lamp cord.



The lamp is of mahogany and red art glass

The column is made of four pieces glued together, mainly so that the recess for the socket can be worked out with less trouble, but it can be shaped from a solid, glued-up piece. A regular pull socket is used, but the brass outer shell is discarded and the fiber cover is glued in the socket recess when the column is assembled. A hole for the chain is bored through one of the sides. The wiring is carried through a

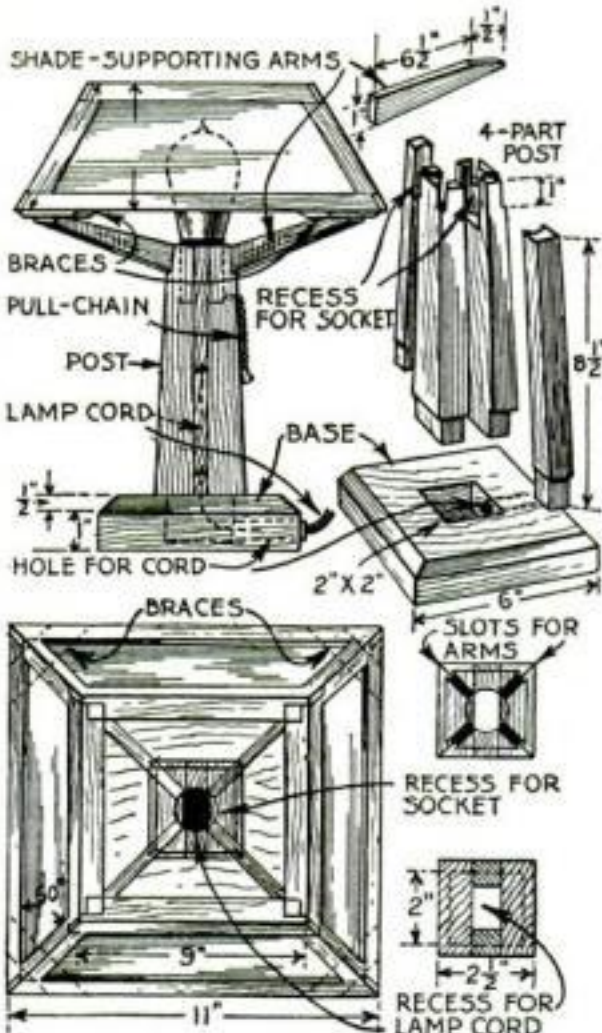

Side and top views of the lamp and details of the base, pedestal, and arms

central hole to the base before the column is glued together.

At the top of the column four slots are sawed, one at each corner, to take the arms that support the shade. These arms are made tapered and are set into the column at a slight angle.

(Continued on page 111)

Play this Jazzy Sax Without Practice

No Lessons Sweet Jazzy Tone

Anyone can play this imported Jazzy Sax right away. No knowledge of music required, no lessons. Play by numbers instead of notes—play by notes or ear if you wish. All directions and 30 songs free! Be popular at parties, dances, picnics.

Not a toy—but a real musical instrument. Glistening, polished brass with nickel mouth-piece. Looks like a regular saxophone the same size. Weighs over 3 lbs.

Beautiful, clear, ringing tones and delightful harmony. No need to spend \$85 when you can own a Jazzy Sax.

"Easy to Play" "This is easy. I played tunes after fifteen minutes and am delighted."—V. D. Beatty, Chicago, Ill. "I find your Jazzy Sax is very easy to play."—Clara Lemke, Appleton, Wis. You, too, will be delighted with your Jazzy Sax.

Send No Money

Just fill out the coupon below. When the Sax and the 30 Free Songs arrive, pay the postman only \$5.98 plus a few pennies postage. Play the songs right away. You don't risk a penny. Satisfaction guaranteed or money refunded. But the supply is limited—so don't delay. Mail the coupon today.

Send This Coupon Today

FERRY & CO., 75 W. Van Buren Street, Dept. 1785, Chicago, Ill.

Please send me at once your Jazzy Sax and 30 Free Songs. On arrival I will deposit \$5.98 plus postage with the postman. If I am not satisfied, I will return the instrument and you will refund my money.

Name.....
Address.....
City..... State.....

MASTER ELECTRICALITY AT HOME

Send for Free Book. A straight-from-the-shoulder talk about your future. No misleading promises to insult your intelligence as "Earn \$10,000 a year" or "Become an Electrical Expert in a few months." Let me help you better yourself as I have helped thousands. Instructions easily understood.

FREE BUY SUCCESS WITH BURGESS TRAINING
Our close connection with International Association of Electrical Engineers gives you unusual chances. Experts everywhere endorse this course. All branches of electricity covered. FREE—Slide Rule and Course in Slide Rule Reading if you ACT NOW. Write TODAY for FREE Book. New Radio Course Now Ready. **BURGESS ELECTRICAL SCHOOL**
Yocko Burgess, Superintendent
Dept. 12, 746 E. 42nd St., CHICAGO, ILL.
Canadian Branch, 201C Crawford Pl., Toronto.

How to Make and Use a Small Chemical Laboratory

By RAYMOND FRANCIS YATES. The treatise covers all of the essentials of elementary chemistry. The second part of the book is devoted to chemical and electro-chemical experiments. Price, 75 cents

Popular Science Monthly


225 West 39th Street New York

Craftsman's Table Lamp

(Continued from page 110)

Although it seems rather formidable, the shade is really not difficult to make. If a protractor or bevel is not among the tools available, the frame should first be laid out full size on paper. The main angles are cut at 60 degrees and the joints are made in the fashion of a half lap, the tongues being $\frac{1}{8}$ in. thick. The cutting is done on the inside, where the glass goes. The outer angles can be planed, but the inside will have to be finished with a chisel.

The shade frame is assembled by gluing together two panels and letting them dry before putting on the connecting pieces.

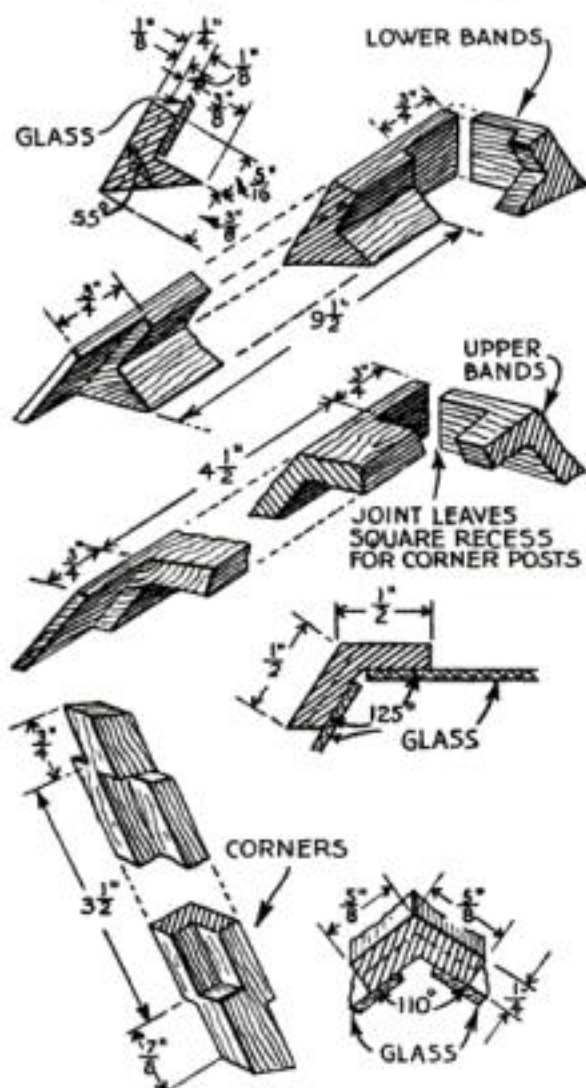

How the pieces for the shade frame are cut out and put together

If the lengths have been laid off accurately, and the angles cut carefully, they should go together without any trouble. They should be clamped and left overnight for the glue to harden.

Since all of the bands are made the same length, it is necessary to trim off the ends of the bands glued first, so that the remaining bands will go on properly. A file is a most useful tool for the delicate fitting and lapping, as the depth of the laps is only $\frac{1}{8}$ in.

A place on the bench is cleared off for the final assembly, so that the corners can be tried with a square and thoroughly checked for trueness before the joints are clamped or tied together.

At each corner of the shade a small piece of wood is glued to take a small wood screw passing up through the end of each arm.

The lamp should be stained and finished as desired before the glass is set. The glass is bought cut to the exact sizes and is put inside the shade with small nails, wood screws, glazier's points, putty, or sealing wax.

Special Offer

\$6⁹⁵

Regular Value
\$10.00

\$1⁰⁰
Down

Brings this
All Wool
Heavy
Sweater

Send only
\$1.00 with the
coupon for
this All-Wool
—heavy, jum-
bo sweater.
Money back
instantly if
you ask for it.
Order NOW!

Heavy Pure Wool

This is a splendid big sweater at a bargain price. Every fibre pure wool. Heavy rope stitch. Large fashioned shawl collar. Two large lined pockets. Close knitted wrist-lets. Ivory buttons to match. Made in big, full size, in rich fast colors. Nothing so practical for fall and winter wear. Sold by most stores for \$10.00, all spot cash. Sizes 34 to 46. Colors: Dark Maroon or Navy Blue. Order by No. F-12. Send \$1.00 with coupon. \$1.00 monthly. Total \$6.95.

6 Months
to Pay

Write for our
Free Bar-
gain Catalog
of men's
women's and
children's
clothing and
shoes. Every-
thing on
small month-
ly payments.

Send Coupon

Don't miss this bargain. The supply is limited. You take no risk. We stand back of this sweater. Money back if you say so. Compare our prices with cash prices in retail stores. Send the coupon now with \$1.00. Don't be too late for this Special Offer. Send the coupon NOW.

Elmer Richards Co.

Dept. 1789 W. 35th St., Chicago, Ill.

Buy the Elmer Richards way, on credit, as thousands of well satisfied men do. Everything you need in clothing or shoes and you pay in small monthly sums. Open a charge account with us. No charge for credit. One price only. Strictly dependable qualities.

Elmer Richards Co.

Dept. 1789 West 35th Street, Chicago, Ill.

I enclose \$1.00. Send Heavy Wool Sweater No. F-12. Size _____ Color _____
If I am not satisfied when I receive the sweater I can return it and get my payment back with charges. Otherwise, I will pay the advertised terms, \$1.00 with coupon, \$1.00 monthly. Total price, \$6.95.

Name _____

Address _____

Town _____ State _____

The Radio Guide Will Tell You—

What radio equipment you will need
How you assemble your receiving set
How to adjust the set for Signals
What radio stations you can hear
How to make a crystal detector receiving set
How to make a vacuum tube detector set
Important tricks and trouble spots in radio
Glossary of principal radio terms
What you can hear with a radio set
How wireless speech is possible
A picture story of how radio works

The Standard RADIO GUIDE

May Save You \$5⁰⁰ to \$50⁰⁰

ANSWERS every question of the radio beginner or the man who wants to know more about radio before he begins.

Every difficult point is made doubly clear by photographs and diagrams.

Price, post paid 50 cents

POPULAR SCIENCE MONTHLY
225 West 39th Street New York City

ATKINS

METAL CUTTING SAWS



Do Your Work Faster—Easier


TRY an Atkins Non-Breakable Blade in your hack saw frame. It will saw the toughest metal faster and easier than ordinary blades, hold its cutting edge longer, and will not break.

There's a reason. These blades are made of selected steel, and are hardened and tempered by an exclusive gas-and-oil process, which gives a hard, keen cutting edge and a tough, flexible body.

You can eliminate losses of time and money due to breakage of brittle blades by using Atkins Non-Breakable Hack Saw Blades. Prove it for yourself. Send ten cents and tell us what metal you want to cut, and we'll send you a sample blade.

Saws for Every Use

When you need a hand saw, circular saw, band saw, pruning saw, metal cutting machine, or any saw for cutting wood or metal—there's an Atkins product that will save time, money and labor. Write for free booklets on the saws you need.

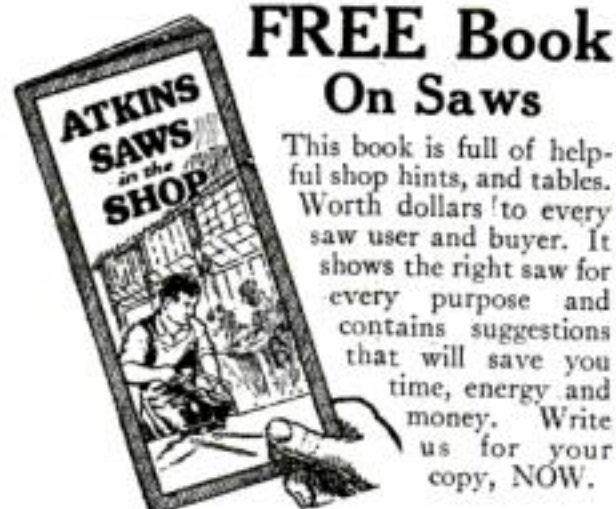

E. C. ATKINS & CO., Inc.

Dept. D-20, INDIANAPOLIS, IND.

Makers of Silver Steel Saws and Tools



Old Electric Lamp Makes Novel "Crystal" Gazing Globe

CRYSTAL gazing globes, sometimes used by seers and mind readers, cost from \$5 for the cheapest glass to \$500 for the larger, highly polished crystal ones. An excellent substitute, which can be made in the home workshop almost without cost, will give just as much amusement as an expensive globe and can be easily "doctored" to provide mysterious "visions."


The writer made the "crystal" illustrated from an old, sphere-shaped, tipless electric light globe. The copper shell at the end was removed and a tiny hole was filed into that part of the globe formerly covered by the metal. Air was admitted gradually so as to avoid breaking the bulb. A ring was then filed around the socket part, next to the globe, and the sphere shaped part broken off by gently tapping it. Fitted and glued to a turned wood base, the sphere forms an excellent gazing globe.

The diagram shows how a special base was constructed to give entertainment to friends. It was made of a 4-in. length of cardboard mailing tube, covered with black velvet and glued to the wooden base and to the globe. Inside the tube is a small flashlight battery which supplies current to a light when a button switch, concealed under the velvet, is pushed.

The light illumines a transparent picture and causes it to appear in the



The "crystal" globe

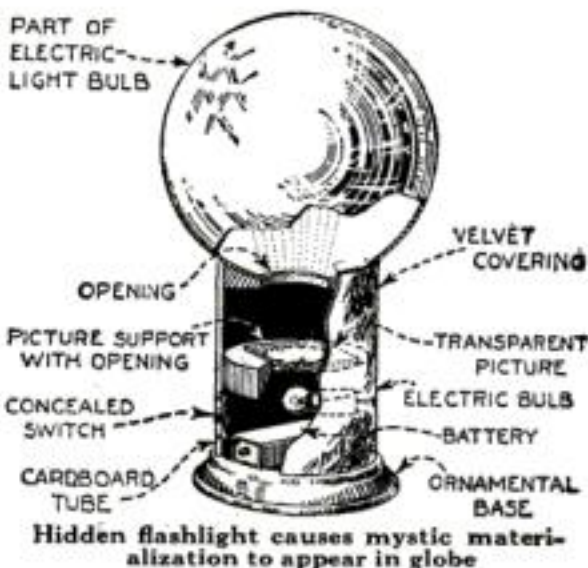

globe, as if a materialization in a séance. The opening beneath the globe for the reflection should be small and hidden as much as possible by the velvet.

A picture to suit the "medium's" purpose is drawn on glass or celluloid or a transparent slide, as for a magic lantern, or is made from a photograph.

BEFORE putting a paint brush away wash it thoroughly with kerosene, and while still soaked, wrap it in waxed paper. Use turpentine, gasoline or benzene to wash it out before using it again.

Sent on
Approval

21 JEWEL

No Money Down

While other watch dealers are raising their prices, asking you for larger monthly payments, and making payment terms harder for you to meet, we are offering you our new model Santa Fe Special, no advance in price, no money down, easier terms and smaller monthly payments. WE realize the war is over and in order to double our business we MUST give you pre war inducements, better prices, easier terms and smaller payments.

LOOK Adjusted to Positions
Adjusted to Temperature
Adjusted to Isochronism
Adjusted to the Second
Thin Model. All Sizes

Without one penny of advance payment let us place in your hands to see, to examine, to inspect, to admire, to approve, a real masterpiece in watch creation. A Watch which passes the most rigid inspection and measures up to the exacting requirements of the great Santa Fe Railway System, and other great American trunk lines.

Page 12 of our Watch Book is of Special Interest to You

Ask for our Watch Book free—then select the Watch you would like to see, either the famous Santa Fe Special or the 6 position Bunn Special, and let us explain our easy payment plan and send the watch express prepaid for you to examine. No Money Down. Remember—No money down—easy payments buys a master timepiece—a 21 Jewel guaranteed for a lifetime at about half the price you pay for a similar watch of other makes. No money down—a wonder offer.

SANTA FE WATCH COMPANY
C.80 Thomas Bldg., Topeka, Kansas
(Home of the Great Santa Fe Railway)

A Letter, Post Card or this Coupon Will Bring My Beautiful Free Watch Book

SANTA FE WATCH CO.
C.80 Thomas Bldg., Topeka, Kansas

Please send me your new Watch Book with the understanding that this request does not obligate me in any way.

Name.....
Address..... State.....

Learn to Play **SAXOPHONE** EASY PAYMENTS

"C Melody" Artists' Model Complete Professional Outfit

Boy it's a WOW! As easy to play as one-finger tunes on a piano—easiest fingering, easiest blowing, richest TONE! Sax' ever! The choice of teachers and professionals all over the world. Now offered direct from factory at wholesale price on small payments!

10 MONTHS TO PAY!

Thousands of snappy young fellows have made their ARTISTS' MODEL SAXOPHONES pay for itself in spare time earnings! Now at last you can be EVERYBODY'S FAVORITE—you can turn your saxophone playing into pleasure and profit!

FREE TRIAL Sensational offer right now! Big complete outfit on 6 DAYS' FREE TRIAL! Consists of \$10 case, self-instruction book, sheet music, reeds, strap, pearl keys, etc. Only \$1.00 reserves your Saxophone. Small first payment. Balance only \$8 a month! Highest quality PROFESSIONAL Saxophone outfit now within your reach. Write for catalog.

Standard Music Co. CATALOG FREE!
Dept. 430 P.O. Box 593 Chicago

MOVIES In Your Home

Our marvelous practical Movie Machines sell as low as \$5.00—and what's more, we have wonderful films at lowest prices—with a new film rental service. Don't Miss This! Write NOW for Free Catalogue.

PARAMOUNT MFG. COMPANY
Box 1371, Dept. P. S.
Boston, Mass., U. S. A.

Radio Receiving Set Fits Well in Sectional Bookcase

ONE radio fan solved the problem of providing a neat and convenient cabinet for his radio receiving set by putting it in one compartment of his sectional bookcase. A 1-in. thick wooden baseboard was stained ebony black, and the composition panel was attached to the base with short brass screws. The set was shallow enough so that, when placed on



A convenient place for the radio set. The loud speaker, if used, can be placed on top of the bookcase


the bookshelf, the sliding door of the compartment could be shut.

Being placed in the third tier, the set is just the right height for comfortable operation. The cavity to the right of the panel is utilized as a storage place for the head phones, and a hook screwed to the end of the bookcase supports wires that run to the batteries. The batteries are placed in a neat box, stained and varnished to match the bookcase.

When adjustments are necessary, the set is pulled out bodily and placed on a table.—J. R.

Cheaply Made Bins for Nails, Screws, and Hardware


MANY home workshops and garages have not a sufficient number of bins or drawers for small parts, such as bolts and nuts. An economical way of

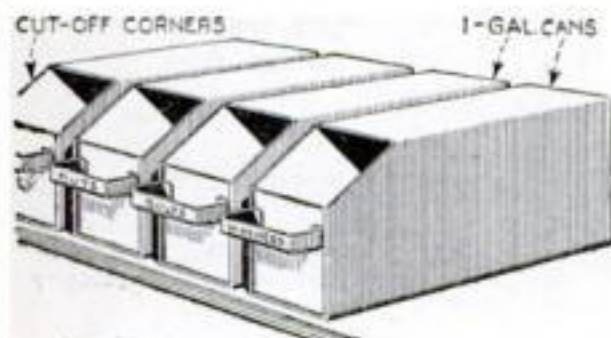

Empty oilcans with a corner cut off make handy containers in the home workshop

making containers for this purpose is to cut a corner off empty one-gallon cans, as illustrated. This is easily done with a can opener and tin snips.

The handle is used as a pull for the bin and also provides a place where a label can be glued. Shelves may be arranged to hold any number of cans.—J. E.

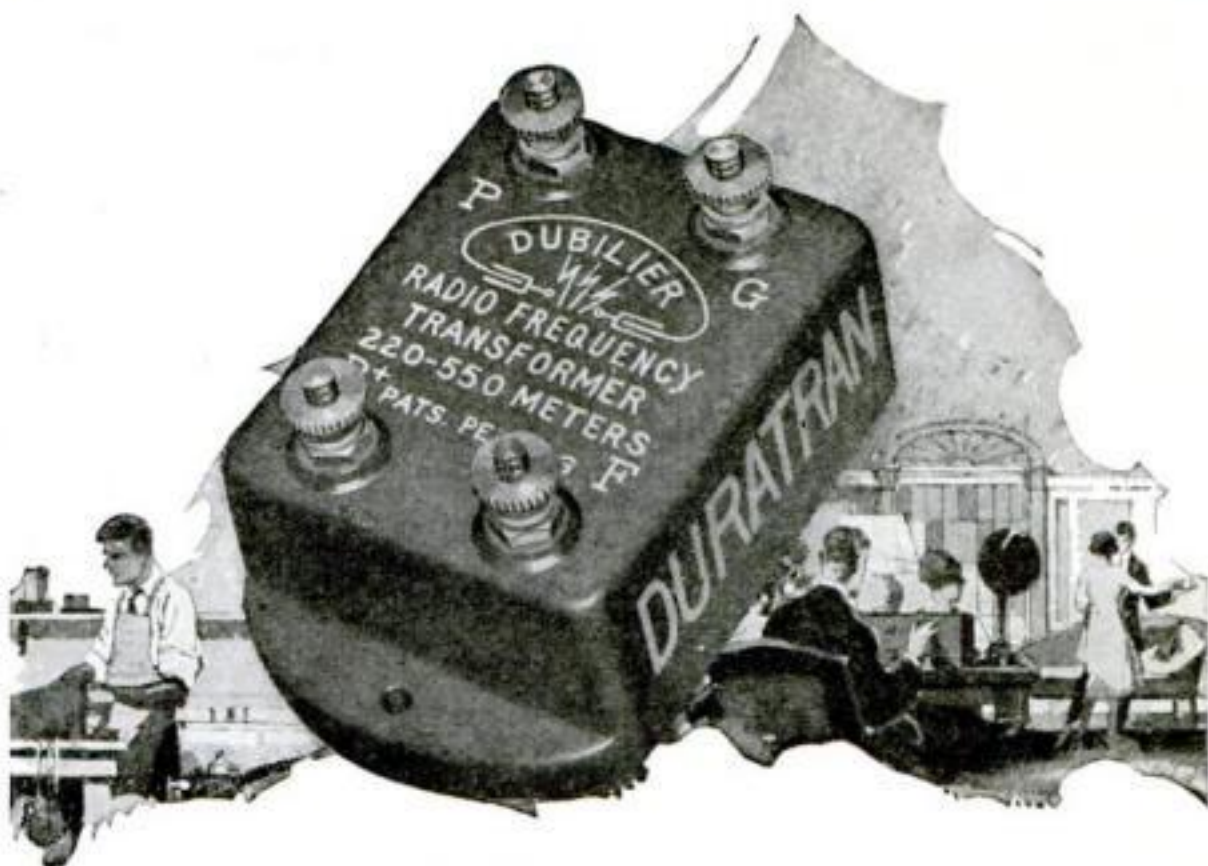

The DUBILIER Duratran— Amplification on all wavelengths

THE Dubilier Duratran is the supreme radio-frequency transformer. It amplifies powerfully and uniformly over *all the wavelengths* now used by broadcasting stations.

Price \$5.00
At all good dealers

Write for booklet on radio-frequency amplification

DUBILIER CONDENSER AND RADIO CORP.

48-50 West Fourth Street, New York



Dubilier Ducon (Socket-plug)



Dubilier Micadon (Fixed Condenser)



Dubilier Variadon mica variable condenser.

DUBILIER DEVICES

\$25.00 in PRIZES

See top of page 8 in front of book for details

Learn AUTO PAINTING

THE best paid profession in the industry—experience not necessary. We teach everything from A to Z in 8 to 10 weeks. More men are needed.

Now you can make \$50 to \$300 a Week.

Factories are calling for men. You can start a business of your own with no more capital than a few brushes and some paint. Investigate our Earn While Learning Plan. Enroll now for Fall and Winter Course. All information free.

DETROIT AUTO PAINTING SCHOOL
The pioneer, the largest and best equipped School in U. S. A.
412 D. A. P. S. Bldg.
1471 Van Dyke Avenue DETROIT, MICH.

BE A TRAFFIC MAN

DEMAND INCREASING DAILY

With the energetic revival of business activities, the demand for men trained to handle transportation problems is greater than ever before. Our highly specialized course prepares you for this high salaried profession. Personal attention and practical experience—with successful Traffic Men. Special plan to help pay your tuition. Post graduate course FREE. Write today for full information.

INTERSTATE TRAFFIC SCHOOL
212 Traffic Bldg. Fort Wayne, Ind.



The FLORSHEIM SHOE

Men who appreciate the finer things of life look upon THE FLORSHEIM SHOE as one of the requisites of daily comfort and correct appearance.

The Rodney—Style M-131

Most Styles \$10

Booklet "Styles of the Times" on request

THE FLORSHEIM SHOE COMPANY
CHICAGO



Prices Reduced On All Standard Make TYPEWRITERS



Lowest Prices in Years
We will ship any make you choose for one week's trial. Underwood, Royal, L. C. Smith, Remington, Oliver, etc.

Easy Terms Pay less than rent each month and own a typewriter. Guaranteed as good as new. Perfectly rebuilt by experts—the famous "Young Process." Send for our free trial offer and new low price list now. **WRITE TODAY.**

Young Typewriter Co.
World's Largest Dealers in Standard Typewriters
654 W. Randolph St., Dept. 142C, Chicago, Ill.

SEND NO MONEY

For this beautiful 14^{kt} gold fountain pen—with your name engraved **FREE** in 18^{kt} gold



Special 10-DAY FREE TRIAL

Try this beautiful, 14 karat gold fountain pen free for 10 days at our expense. If you're not delighted with its beautiful appearance, smooth writing, don't pay one penny. The "Wonder" is a high grade, guaranteed, self-filler fountain pen with 14 pt. gold band tempered, iridium tipped pen point, 14 kt. gold-filled safety clip and lever. Women's size too, with pretty gold-filled ring for neck ribbon. As a special introductory offer, we will engrave your name **FREE** in gold letters on the barrel of pen. Regular \$5.00 value in retail stores, now offered direct for only \$1.75. **Send no money.** Just name and address. Deposit \$1.75 and postage with postman when pen arrives. Your money back if not absolutely satisfied after 10 days trial.

Splendid for gifts—Christmas, Birthdays, etc.

THE BRITMOR CO.,
Dept. PSM, 236 Fifth Ave., New York City

Saws as much as 10 Men!

Now, you can saw 15 or more cords of wood each day with the OTTAWA Log Saw. With wood selling at \$3.00 a cord, owner makes \$45.00 a day. Send for **SPECIAL OFFER**, now.

NEW MODEL: Write for Special Introductory Offer and advanced information about the wonderful new model OTTAWA—just out. Send your name on post card today.

30-Day Trial

Cash or Easy Terms

OTTAWA 4 in 1 LOG SAW
Get **BIG Factory-to-User Offer!**

Send for Big **FREE 32-Page Book**, Special Offer and Low Prices. Write today.

OTTAWA MFG. CO.
1505 N. Wood St.
Ottawa, Kansas.
Room 1805 H
Magee Building
Pittsburgh, Pa.

New Improved OTTAWA



Camping Out at Home with a Fireplace Cooker

TO THOSE who have an innate desire for campfire cooking, I suggest an occasional meal prepared on a tripod over the flames in the fireplace. Try this for a picnic Sunday supper or for that luxurious night when the maid is away.




The iron tripod

The tripod is necessary because modern fireplaces, although quite common, rarely have cranes. It is simply a triangle of iron with 7- or 8-in. sides mounted on legs that have a slight outward spread for steadiness. The legs may be 4, 5, 6, or more inches high. You can have the stand made by your local blacksmith.

This tripod, which can be placed right over your fire, supports three pans, one on each corner. With a lively blaze to cheer you, you can cook whatever you wish and broil steak over the coals beside.—A.D.P., Hindman, Ky.

Shed-Roof Brooder House Serves Double Purpose

POULTRY raisers who are planning to build new chicken houses will find a useful suggestion in the accompanying illustration of an up-to-date shed-roof brooder house. It was recently designed and built by the Poultry Husbandry Division of the Bureau of Animal Industry,

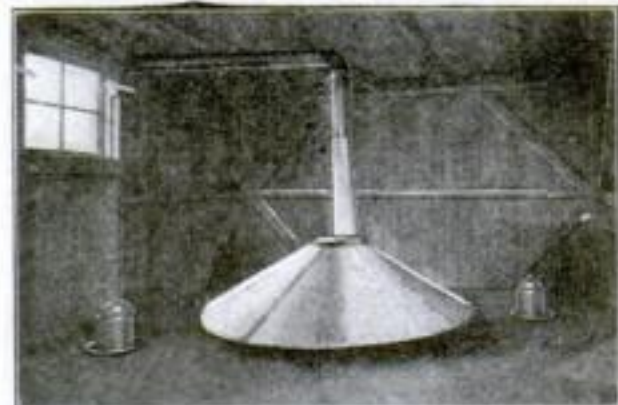

The outside of the poultry house (above) and the interior with brooder stove (below)

United States Department of Agriculture, for experimental use at the Government poultry farm, Beltsville, Md.

The house is 10 ft. wide in front and 14 ft. deep. It can be used for laying hens as well as for brooding purposes, so is especially valuable on farms where chicken raising is more or less of a side issue.


When used as a brooder, the chickens are kept near the stove for the first two days of their life.—S. R. WINTERS.

Simply Made Concrete Strongbox Safeguards Valuables

By George A. Luers

THE advantage of having a fireproof and, if possible, secret container in the home for deeds, notes, valuable papers, jewelry, and silver plate, can hardly be overestimated. Any one who has been through a fire or suffered a burglary knows the dollars-and-cents value of a good strongbox. The small deposit boxes available at banking places are best of all, of course, but relatively few householders find it convenient to use them for everyday purposes.

To make up a serviceable small safe deposit box of concrete is not difficult and it will be fireproof and, if well concealed,

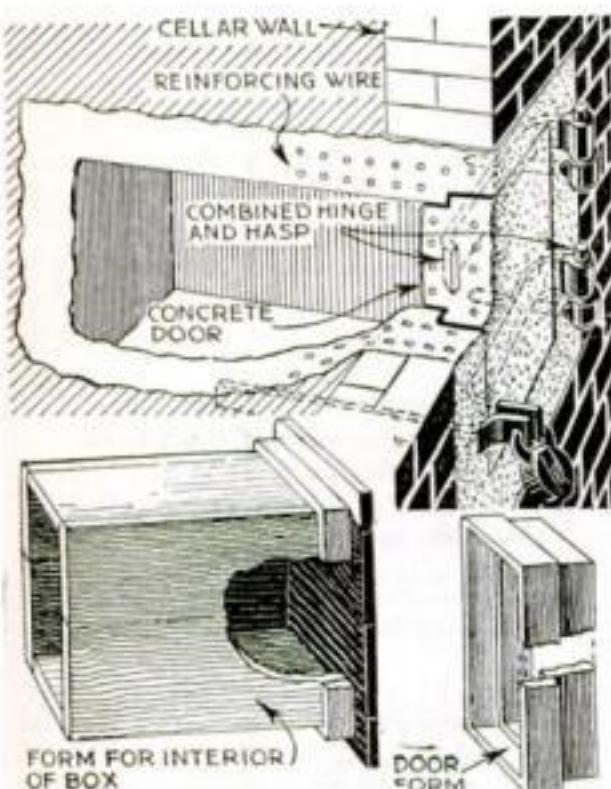

Cut-away view of the completed strongbox and the wooden forms

practically burglar-proof. A basement wall location is usually best. If the box is built into a wall it cannot very well be removed from the building, and if it is concealed with a screen or shelving, it is not likely to be discovered by any outsider.


A 2-ft. square excavation, about 3 ft. deep, is made into one of the walls at the desired location. A box form is constructed of wood to form the mold for the interior of the box; this is about 15 in. square and 30 in. deep. The cavity itself serves as the outer mold.

The concrete mixture should be quite rich in cement, the proportions being about one part cement to two parts sand. In pouring the box, the forward top section of the form is left off; the concrete is then poured in and tamped, and the final filling is made at a small aperture above the edge of the top of the form after the top piece is put on.

To do this properly requires some care and the mixture must be quite liquid, in order to prevent any "voids" being left in the concrete. In many cases it is easier to dig down through the earth from outside, if the distance is not great, and fill the back part of the form from above. In fact, various expedients can be adopted in pouring forms of this type. Meshed wire is used about the front of the box to

(Turn to page 116)

This Amazing Book Makes Radio Easy

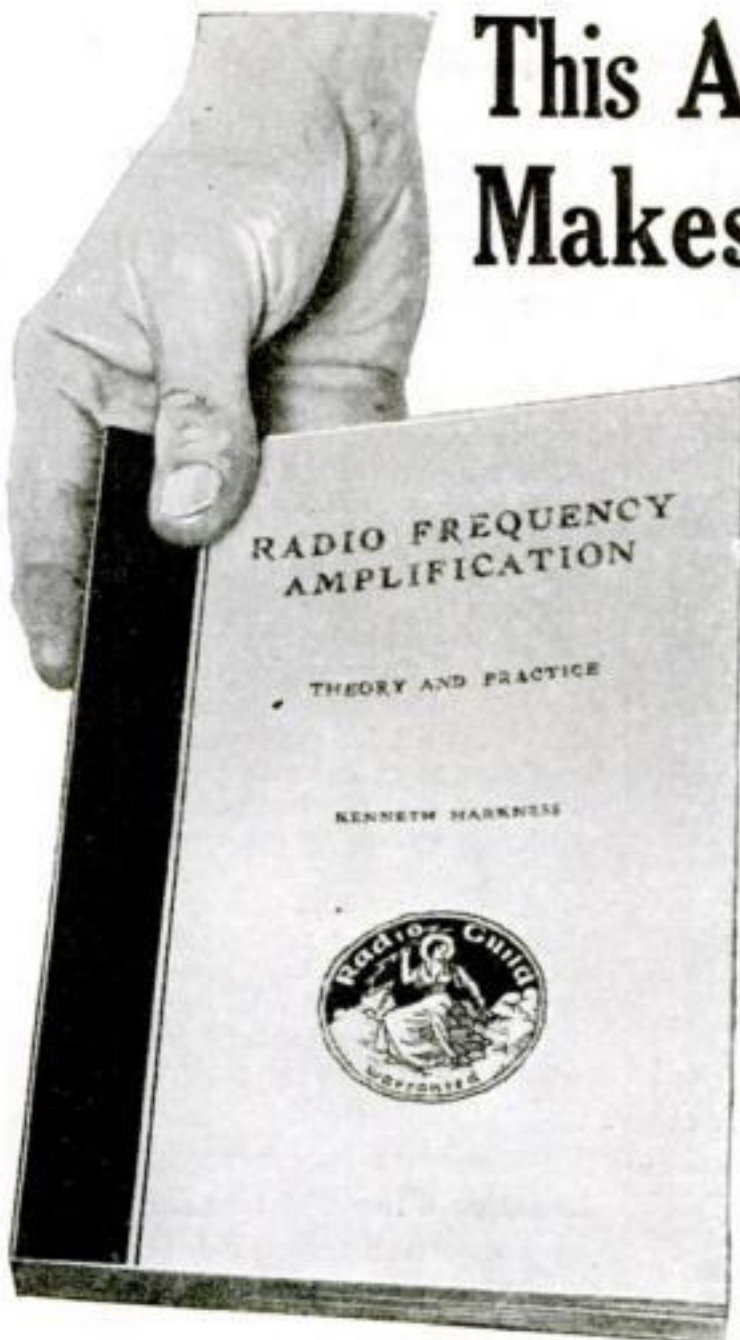

It explains to you in easy-to-grasp language the theory of radio reception from A to Z. It tells you everything you want to know about radio—answers all your questions.

It shows you how you can easily build at very low cost a new easy-to-operate one tube radio receiver which runs a loud-speaker! It also shows you how to build four other types of modern luxurious radio receivers.

If you already have a radio receiver this book will tell you how to add a Radio Frequency Amplifier and thereby make your set receive stations thousands of miles away.

This astonishing book actually tells you how you can banish interference from your receiver.

All the latest developments of the radio laboratories are disclosed in this remarkable book written by Kenneth Harkness, Chief Engineer of the Radio Guild.

Examine this amazing new book and judge for yourself. Mail the coupon below for your copy today.

What This Book Means To YOU

This book will teach you elementary and advanced radio—with hardly any effort on your part! Kenneth Harkness wrote this book with you in mind. He realized you have absolutely no use for radio books full of complex equations and involved statements. At the same time he knew you don't want to read a book which is too simple and elementary—which doesn't teach the things you want to know. So Mr. Harkness wrote his new book in **your** language—the language **you** use every day; the language **you** understand. His book fills an open gap in radio literature. He explains advanced radio—hitherto understood by mathematicians only—yet he explains it in simple easily understood English. He sits right down with you and explains in easy-to-grasp language the big important things in radio you always thought were too complicated to understand.

In the first part of his book the author leads you step by step from the elementary laws of electricity to the advanced principles of radio reception. His arguments are so skillfully worded; his explanations are so simple and understandable that you will quickly and easily learn how modern radio receivers operate.

In the second part of his book he will tell you how to **build** receivers—with all the details of construction. He doesn't leave anything to your imagination. He tells you exactly how you can build your choice of 5 different types of modern radio receivers. With 175 diagrams, drawings and action photographs each consecutive step in the construction of these receivers is unfolded for you with the graphic clearness of a talking moving picture.

The very first day you start reading this book you will feel yourself growing in knowledge. Everything is so delightfully clear; each subject is taken

up so smoothly and simply that you will clean forget you are actually learning advanced radio—actually learning all about the operation and construction of the latest types of radio receivers.

Special 5-Day Examination Offer

You've always wanted a real live, practical radio book like this. You can have it for the asking—without paying a cent in advance. In fact, we are so confident that you will be *delighted* with this book that we will send it to you for 5 days' examination and let you judge for yourself! Just fill in and mail the coupon below. Don't send any money—pay nothing until the book is actually in your hands. When the postman arrives deposit with him the full price of the book—only \$1.25 plus a few cents postage. Examine the book for 5 days. Read it from beginning to end. See for yourself how it expands your knowledge of radio. Learn all about the remarkable receivers Mr. Harkness describes. If you are not absolutely satisfied, if you do not feel that the book is all that we claim and more—send it back and we will promptly refund your money. That's fair enough, isn't it? You take no risk—you've nothing to lose and everything to gain so mail the coupon today and get your copy by return. Don't delay—you may forget or misplace this advertisement and thereby miss this great opportunity. Do it now while you're thinking about it.

Do it now
SEND NO MONEY
JUST MAIL THIS
COUPON



THE RADIO GUILD, Inc.
256 West 34th St., New York, N. Y.

Please send me—immediately—the new Kenneth Harkness book "Radio Frequency Amplification," explaining the theory and practice of radio reception in simple language. When the book arrives I will deposit \$1.25 (plus a few cents postage) with the postman. It is understood that if I am not absolutely satisfied I may return the book within five days after receipt and you will refund my money without question.

Name.....

Full Address.....

(Orders from Canada and other countries outside of the U. S. are payable \$1.50 cash with order.)

P. S.—12-23

Price Cut 1/2 On World's Greatest Reference Books



Latest Edition

Let experts work for you—in these books you will find the most remarkable collection of practical job experience and vital knowledge that was ever assembled in book form. More than 200 of the greatest engineers, lawyers, business men, and practical experts—all of them men who have gone through the mill—give you in these books a lifetime of valuable inside information on the line of work in which you want to get ahead. Make their knowledge and experience your own. Let them show you all the newest methods—the best ways of doing things. This very minute you may be up against some tough problem—if you had these books you would solve it instantly. Send the coupon for

A Week's Free Trial

Just fill out the coupon and we will immediately send you any one of these libraries express collect. Read the books over carefully. Test them out thoroughly for seven days. If you do not want them, send them back at our expense. If you decide that they will do for you what they have done for 280,000 other men to whom they brought more money and success, pay \$2.80 within one week and \$3.00 a month thereafter until the special price is paid. This amounts to only 10c a day. Mail the coupon NOW if you want a bigger, better job and bigger pay.

Free Consulting Membership

A resident staff of from 15 to 20 practical experts is waiting to solve for you any difficulty that you may have.

Your Choice 75c a Week

- 5 vols. Carpentry and Contracting—was \$37.50 now.....19.80
- 2 vols. American Law and Practice (including free reading course and 250 page book of standard legal forms)—was \$97.50 now.....49.80
- 4 vols. Applied Electricity—was \$60.00 now.....29.80
- 6 vols. Auto Engineering—was \$45.00 now 21.80
- 9 vols. Civil Engineering—was \$67.50 now.....34.80
- 8 vols. Business Management—was \$52.50 now.....29.80
- 7 vols. Steam and Gas Engineering—was \$52.50 now.....24.80
- 4 vols. Sanitation, Heating and Ventilating—was \$30.00 now.....14.80
- 4 vols. Fire Prevention and Insurance—was \$30.00 now.....14.80
- 6 vols. Modern Machine Shop Practice—was \$45.00 now.....21.80
- 4 vols. Telephone and Telegraphy—was \$30.00 now.....14.80
- 4 vols. Drawing—was \$30.00 now.....14.80

A letter or a wire to American Technical Society will bring you an immediate answer and the solution to your problems. This advisory staff of practical men plus your working and reference library will enable you to handle successfully any job in your line. These men know all the latest methods and the newest and best ways of doing things. Let this pay-raising consulting staff be YOUR SILENT PARTNER.

This free consulting membership offer is good for a limited time only and can be withdrawn without notice.

Send No Money

Here is your opportunity if you want to earn more money. Remember we are taking all the chance—you pay nothing until you are thoroughly convinced that these books will help you to greatly increase your pay. Isn't this about the fairest proposition that was ever made you?

American Technical Society

Dept. X-920, Chicago, Ill.

© A.T.S. 1923

AMERICAN TECHNICAL SOCIETY,
Dept. X-920, Chicago.

Please send me a set of for seven days' FREE EXAMINATION, shipping charges collect. I will examine these books thoroughly, and if satisfied will send \$2.80 within seven days and \$3.00 a month until I have paid the special price of \$..... If I decide not to keep the books, I will return them within one week at your expense. It is understood that if I keep the books I am entitled to a FREE Consulting Membership in the American Technical Society.

Name.....

Address.....

Reference.....
(Please fill out all lines, give local merchant, banker, or employer as reference.)

Simply Made Concrete Strongbox

(Continued from page 115)

prevent the concrete from cracking and breaking out.

A wooden form is made for the door, as indicated, and meshed wire is used as reinforcement. The hinges and hasp are set in place as the concrete is poured, so that they are cast integrally. These parts are wrought-iron fixtures of heavy construction, such as are used for barn doors.

The pin parts of the hinges, which enter a wall section, are wrapped with wire and the ends are left protruding into the form, so as to make a solid bond into the concrete.

After the concrete has hardened or set for a period of two weeks, the interior and door should be finished with paint. Linseed oil is used for the first coat, followed by one or more coats of any good paint and a final coat of white enamel.

A good strong padlock serves as the lock. If the casing and door have been made carefully, with the concrete thoroughly mixed and reinforced with wire, and the hinges and hasp set to match up evenly, the box will prove a tight, safe, and commodious receptacle for the small valuables that are not infrequently a total loss through fire or burglary.

Leather Flap Protects Padlock from Snow and Ice



ALTHOUGH the better grades of padlocks are designed to withstand exposure and abuse, they will last longer and be easier to handle if protected with leather or rubber flaps, as shown. Even in the most severe weather, these protectors prevent the padlocks and hasps from becoming frozen and caked with ice and snow.—F. J. A.

To Clean Household Brushes

BRISTLE brushes should be washed with lukewarm water and a little ammonia, although borax or soda can be used in place of ammonia. Cleanse the bristle part thoroughly, shake out, and let the brush dry in the sunshine.

Dipping the bristles in a strong solution of alum will make them stiffer.—R.C.

Simple as ABC



—And comprehensive, too. The new Valley Battery Charger, Type ABC, charges all Radio storage batteries—2-volt peanut tube batteries, 6-volt A Batteries, and 1 to 4 B Batteries. Also charges 12-volt batteries.

Plugs into regular electric light socket. Uses a negligible amount of current—a dime's worth for an average charge.

Unfortunately, production is limited. Don't miss out, and don't buy another until you have seen the Valley Type ABC Charger. At all good radio dealers.

VALLEY ELECTRIC CO.

3157 S. Kingshighway St. Louis, Mo.

Valley Battery Charger

CAR OWNERS WANTED!


To use and introduce the greatest improvement in Inner Tubes since autos were invented. Air gauge in valve stem of every Tube shows at a glance through the Unbreakable Transparent Valve Cover amount of air in tires.

AIR-GAGE Heavy Duty Tubes

—sell on sight to almost every car owner because they save trouble, time, worry and expense. Add one-third to life of tires. Paul salesmen make big profits selling direct to car owners. Our million dollar factory can use 500 more salesmen at once. Experience not necessary. Big illustrated Free Book tells how the Paul Plan will start you in this big money-making business without capital. Write for Free Book Today, THE PAUL RUBBER CO., Dept. 34, Salisbury, N.C.

ADD \$5.00 a DAY to YOUR PROFITS with a TORIT ACETYLENE TORCH No. 13

For radiator repairing, general soldering, light brazing, heating, battery repairing, etc. Produces instant hot flame, works rapidly. Furnished with 4 different tips and soldering copper, enabling you to do a wider range of work.

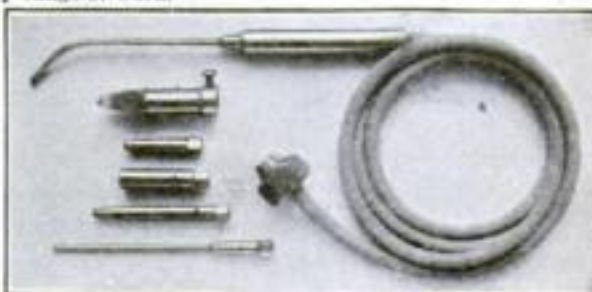

USES ACETYLENE ONLY

A splendid use for discarded auto acetylene tanks. Many owners make the Torit No. 13 pay for itself in a single day. Torch with 4 different tips, soldering copper, 5 ft. tubing and connection for auto acetylene tank \$7.50.

Order today from your jobber, or
St. Paul Welding & Mfg. Co., 164 W. 3rd St., St. Paul, Minn.

Phonograph Operates Flasher

(Continued from page 120)

position by weights, by placing them inside the cabinet and using soft wedges, or in any way that suggests itself.

When a screw on the disk passes between an upper and lower spring contact, the electrical circuit is completed and the lights light until the screw runs off the contacts.


The method of laying out the wooden disk is made clear in the illustration. There are four circles, one for each contact. The number of divisions of the plate depends on the number of color combinations desired, the limit being set by the number of strings of lights employed. With four strings it is possible to produce 15 different combinations. This is done by using each string separately, and then two or more strings in combination.

The screws are set in the disk in the same manner as in the spring holders except that there are no connections, the screws serving merely to connect the upper and lower spring contacts between which it passes. The speed of the disk is reduced as far as possible with the adjustment provided on the machine and the friction of the contact reduces it to a still greater degree.

The method of arranging the lights is optional. All the lights on one string may be of the same color, or they may be different. Experiment will determine which gives the most pleasing effect in the decoration of any given tree.

Making an Auto Steering Wheel Spider and Hub

IF A larger steering wheel is to be fitted to an automobile, or a wheel has to be made for a homemade motor vehicle, the construction of the spider and hub can be easily accomplished. Secure a wooden rim of the diameter desired and then turn up a piece of cold-rolled steel shafting to the proper diameter to form the hub.

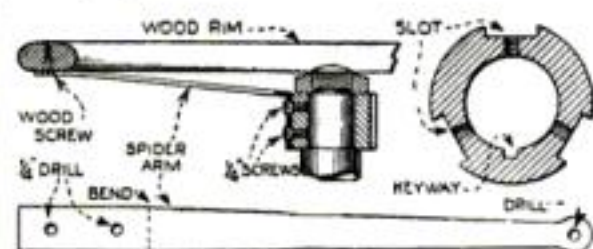

How the hub and arms are made and put together to hold the wooden wheel

Slot it in three places, as shown, the slots being just deep enough to give the spider arms a solid anchorage. The hub should have a keyway to fasten the wheel to the steering column.

The arms proper are made of flat steel stock, neatly tapered off. Three arms, if strong enough, are sufficient, although four lighter ones also make a good looking job. A hole for a wood screw is drilled and countersunk in the eye end of each; the other end is drilled for 1/4-in. oval countersunk head screws. The arms are then bent to the required angle.

The corners of the arms should be neatly beveled off and the metal painted with black enamel.

Earn Big Money Learn the Automobile Business

PUT YOUR NAME HERE

Think of the repair work necessary on the thirteen million automobiles in the U. S. A. alone! Electrical systems, engines, etc., to be maintained, batteries and tires to be repaired and replaced. Think of the wonderful opportunities for a shop of your own. There are not nearly enough trained men to do this work right. Why not get some of this good money yourself? Thousands of graduates of the Michigan State Automobile School (all over the world) are now successful in good jobs or in shops of their own. Age, education, or experience make no difference. You can be successful too if you will get M. S. A. S. practical training now.

Unlimited Opportunities For Trained Men

Get the right start. Come to Detroit and learn the business thoroughly. Study automobiles, engines, trucks, auto electricity, tractors, farm lighting plants. Learn on best equipment, all in good condition, up-to-date. Our engines are ready to run, our electrical systems are kept in A-1 condition,—no useless junk to look at but not fit to learn on. You are taught under factory endorsed methods by expert instructors. A thorough complete course that slights nothing. Plenty of time in every department to learn right.

What Our Graduates Say R. L. Beck, Pa., writes: "My wages have been increased 300% in two years since getting M. S. A. S. training." M. B. Gill, Idaho: "I am now foreman of my shop, have doubled my salary and am turning out far better work than before I took your course." J. I. Mayes, Kansas: "I have saved \$100 every month since taking your course." Vanderbie, Holland, Michigan, writes: "We have the Durant agency and are the busiest place in Holland." Thomas, Pa., "Three months after graduating I became foreman of the Dodge garage at \$200 a month." Nelson, N. Y., (seventeen years old when he graduated) writes: "I have five men working for me." Greve, California, "Last year's business bought us a nice little home and we have started buying another this year." These are not exceptions. They are just average fellows, no better than you. You can do it too.

Come To DETROIT—The Auto Center

Here you have wonderful advantages. Visit the great plants, Ford, Dodge Cadillac, Packard, Lincoln, Hupp, Hudson, Studebaker, Paige, Buick, Rickenbacker, many others. These great companies fully endorse this school altho they have no business connection with it whatever. Their letters of recommendation have been written by their executives who have seen our school, inspected our methods, employed our graduates, and furnished us equipment for instruction. They tell you to come here because they know our course is right. This is the **only automobile school in the world** which has this endorsement. It all means **real opportunity** to you to get ahead. Packard says: "We recommend M. S. A. S. in every particular." Dodge: "A diploma from M. S. A. S. helps get jobs with auto dealers." Cadillac: "Most complete school in the country." Others say the same. Take their word for it and you will be **sure** you're right. Be glad forever after for your M. S. A. S. training. **START NOW! Be A TRAINED MAN,—SUCCESSFUL!**

M. S. A. S. MONEY BACK GUARANTEE

We guarantee to qualify you for a position as chauffeur, repair man, demonstrator, auto electrician, garage man, automobile dealer, tractor mechanic and operator, or farm lighting expert, paying from \$1500 to \$5000 a year, or refund your money.

We Teach: Autos, Auto-electricity, Trucks, Tractors, Tire Repairing, Battery Repairing, Welding, Machine Shop. Send the coupon to day for our big, fully illustrated catalog.

MICHIGAN STATE AUTOMOBILE SCHOOL

The "Old Reliable" School in Detroit, the Auto Center. Endorsed by the Auto Industry. A. G. ZELLER, President.

592 Auto Bldg. Detroit, Michigan

Mail Coupon Today

Michigan State Automobile School
592 Auto Bldg., Detroit, Mich.
Gentlemen:
Without expense or obligation to me, please send your big catalog and tell me more about the opportunities for me in the automobile business.
Name.....
St. or R. F. D.....
City..... State.....
(Do you wish to start your M. S. A. S. training at home or at our school in Detroit?.....)
What are you doing now?.....
Age?..... Married or Single?.....

\$25.00 in PRIZES

See top of page 8 in front of book for details

\$11⁵⁰

COMPLETE

Alfred's Ice King

The Skate for Pleasure

The Finest Tubular Skate and Shoe Made

Used by the World's Greatest Amateur and Professional Skaters. For Sale by All Good Dealers or Direct from Factory.

Factory and Salesroom
Dept. PS, 2846 W. North Ave., Chicago, Ill.

To Sales Managers, and other executives or employers of men

A sure-fire Christmas remembrance for the "go-getters"

The man-to-man gift should be something of a friendly, masculine sort—and something that doesn't presume too much upon personal tastes. Men don't like to be sentenced to wear neckties, scarf-pins, or other adornments of another's choosing.

As the ladies have not, as yet, taken up pipe-smoking, pipe-tobacco remains "he-



stuff." Nothing up-stage about it, either; since the first Indian pipe-of-peace, tobacco has been a symbol of democracy and the brotherhood of man.

No harm is done if some lucky fellow gets two or three jars of tobacco from different friends. Duplicates are welcomed. The more, the merrier Christmas.

Edgeworth is so generally liked that it's a safe, sure-fire present for men. In the glass humidor jar it keeps in condition indefinitely.

These 16-ounce jars are sold at \$1.65 at all tobacco stores; but if your regular dealer hasn't enough of them, we offer you this painless plan, just to relieve the pressure on Santa Claus:

Send us \$1.65 for each pound jar of Edgeworth to be sent out, a list of the names and addresses of those you wish to remember, together with your personal greeting cards.

We will pack each jar in an appropriate Christmas box, enclose your card, and send them all off in plenty of time to be delivered before December 25th.

Personal—If you are not personally acquainted with Edgeworth, we will be glad to send you free samples—generous helpings both of Edgeworth Plug Slice and Ready Rubbed.

Kindly address Larus & Brother Company, 59 South 21st Street, Richmond, Va. If you will also include on your postcard the name and address of your regular tobacco dealer, your courtesy will be appreciated.

To Retail Tobacco Merchants: If your jobber cannot supply you with Edgeworth, Larus & Brother Company will gladly send you prepaid by parcel post a one- or two-dozen carton of any size of Edgeworth Plug Slice or Ready Rubbed for the same price you would pay the jobber.




Building a Realistic Toy Theater

By Ernest Bade, Ph.D.

IT IS Christmas and the room is dark. A square of light is seen through the door; this reveals a miniature stage. Slowly the curtain rises. A tropical shore is seen in the white light of the Southern sun. The sky assumes the fiery hues of a tropical sunset. The sun sinks below the horizon, while a rosy light ripples upon the quiet ocean swell. The waves move! Slowly the scene grows darker, and the curtain falls.

Such is a scene that can be played upon this tiny stage. A number of settings arranged with tiny cardboard figures will illustrate any play or story, such as "Robinson Crusoe" or "The Sleeping Beauty."

First obtain or make a box approximately 5 in. high, 12 in. long, and 14 in.

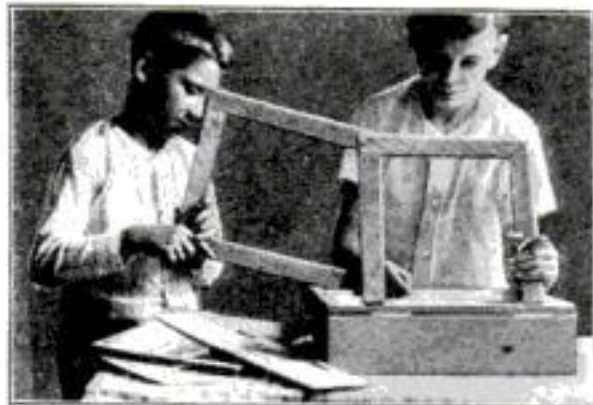

Setting up the two stage frames, which rest in sockets in the box

wide. The lid is hinged at the top of one of the wide and long sides, but before the hinges are attached, make two light squares, each open on one side, as shown. Use thin strips of wood for them. The larger one is made so that it just fits within the box, while the smaller is about 4 in. shorter but just as wide.

Next cut two slits in the front of the box so that the tall U-shaped wooden frame fits snugly, and place a little bracket on the bottom of the box so that the frame will be held firmly. Do the same at the back of the box for the shorter U.

Three parallel grooves are then cut into the top of the box cover. These are 1/4-in. wide and are placed at equal distances from each other. The first is placed about 1 in. from the back of the box, the second two thirds of the way from the front and the last one third of the distance from the front. Now fasten the hinges to the box and place the legs of the two U-shaped pieces in their holes, the larger one being, of course, in front.

Cut two strips of wood so that they just fit between the two frames, and also groove these to correspond with the grooves on the stage. These two braces or bars are then provided with sheet-tin hooks taken from a tin box. Eyes to fit these hooks are fastened to the top of the uprights. This completes the woodwork.

For the proscenium use a strong, stiff piece of cardboard or wallboard. Carefully paste some wallpaper, pictures, or

(Continued on page 123)



The New Gibson Tenor Banjo is featured in Bob Miller's Steamer Idlewild Orchestra

Play the NEW Mastertone

The new Gibson Tenor Banjo, preferred by players who know, is now being adopted by famous dance and recording orchestras because of its marvelous tone, "easy playing" and absolute dependability.

All the tang of real banjo tone with added musical quality, wonderful carrying power and vibrancy, due to the exclusive Gibson Rim and Ball Bearing Tone Tube construction, the biggest improvement ever made in banjos. Gibson Tone Projector takes place of resonator attachments and gives absolute control over tone color and dynamics. SCIENTIFICALLY CORRECT SCALE makes easier playing and eliminates string breakage. These are but a few of the many exclusive Gibson features; all the knowledge and experience of the world's leading manufacturers of fretted instruments has been concentrated in making this supreme instrument.

EASY PAYMENTS on any Gibson instrument, including Tenor Banjo, Mandolin Banjo, Guitar Banjo, Cello Banjo, Mandolin, Mandola, Mandocello, Guitar, Harp-Guitar and Mando Bass. Send Coupon NOW for Free Book and complete information, mentioning instrument.



Gibson

GIBSON MANDOLIN-GUITAR Co.

1205 Parsons St. Kalamazoo, Mich.

Please send me complete information about

(Instrument)

Name _____

Street or R. R. _____

P. O. _____

If interested in becoming a teacher-agent check ()

FORDS run 34 Miles

on Gallon of Gasoline
Low Gear Seldom Used
with Air Friction Carburetor

We guarantee all other cars nearly double present mileage, power and flexibility, make hills on high formerly difficult on low. Models for any car, truck, tractor, marine or stationary engine. Makes old cars better than new. See wonderful mileage guarantees for other cars.

Ford.....34 ml.	Reo.....24 ml.	Chevrolet...32 ml.
Quick 4...30 ml.	Chalmers...23 ml.	Maxwell (25) 30 ml.
Buick 6...24 ml.	Olds 6...23 ml.	Nash 6...23 ml.
Hudson...20 ml.	Paige 6...20 ml.	Lincoln 8...17 ml.
Hupp.....25 ml.	Oakland 6...24 ml.	Stoddard 16...23 ml.
Dodge.....28 ml.	Over'd 4...32 ml.	Cole 8...17 ml.

If your car is not mentioned here send name and model for particulars and our guarantee on it. **AGENTS WANTED SENT ON 30 DAY'S FREE TRIAL** You can drive any car in heaviest traffic without shifting gears. Starts off on high in any weather without priming or heating—no jerking or choking. No more foul spark plugs or carbon in cylinders. No leaking of gas into crank case. Try it 30 days on our guarantee of money back if not entirely satisfied. No strings to our guarantee. **YOU ARE THE JUDGE.** Anyone who can handle a wrench can attach it. No boring of new holes or changing of operating mechanism. Write today. **AIR-FRICTION CARBURETOR CO.**

164 Raymond Bldg.

Dayton, Ohio, U. S. A.

EARN MONEY AT HOME

YOU can make \$15 to \$60 weekly in your spare time writing show cards. No canvassing or soliciting. We instruct you by our new simple Directograph system, pay you cash each week and guarantee you steady work. Write for full particulars and free booklet.

WEST-ANGUS SHOW CARD SERVICE LIMITED

Authorized Capital \$1,250,000.00


63 Colborne Building

Toronto, Can.

Building a Realistic Toy Theater

(Continued from page 122)

designs from magazines, and a few colored papers together to make some kind of an ornamental arrangement around this frame, leaving a clear stage opening 8 in. wide and 7 in. high, which is later cut out. It is well to use two pieces of cardboard for the arch, joining them together with a strip of calico pasted on the back.

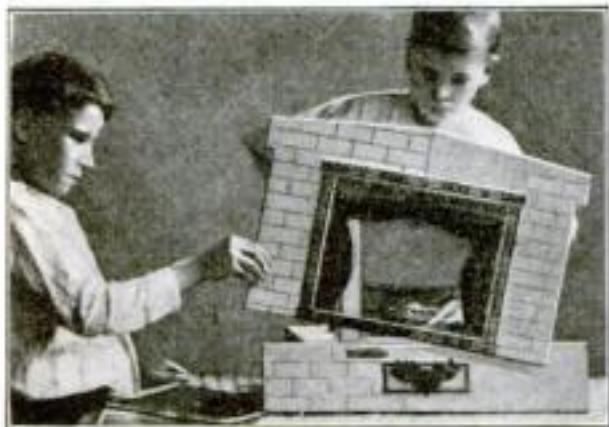

The proscenium is made from cardboard and covered with wallpaper and colored cutouts

This will permit folding so that the proscenium can be packed away in the box when the stage is to be put away.

The front of the box is concealed by another cardboard strip 5 in. high and about 20 in. long. This is also in two parts so that it will fit into the box.

The curtain is just back of the proscenium and consists of a piece of cloth with a picture pasted on it. It is weighted on the bottom with one or two pieces of iron wire. Near one end a cord is firmly fastened for raising or lowering the curtain, the cord winding around the roller. The roller is held in place like any window-curtain shade.

The side scenes and backgrounds can now be made. Each background must have two side scenes to match, cut from cardboard about 11 in. long and 9 in. high. The opening in each side scene may be the same as the stage opening, that is, 7 by 8 in., although it is better to make it about 1 in. larger each way.

The backgrounds also are 9 by 11 in.

They may consist of some simple scene cut from magazines or books, showing rural landscapes, interiors, street scenes, harbors, and the like. The background must fit in



The complete stage, showing the sliding background and side scenes

the last groove of the stage and of the upper bars; the side scenes fit the other grooves, so that all can be pushed in and pulled out easily.

When a number of scenes have been prepared, a few figures can be mounted on cardboard and cut out. Placed on the stage in small wire brackets, small plays

(Turn to page 124)

Wouldn't you like to work this 10 ton CRANE?

LOOK at it! A slight pull of a lever and away up into the air swings 10 tons as though it were ten pounds.

Every bit of the fun of working this crane is yours, if you have Meccano.

You see, Meccano parts are real engineering parts and that makes your crane work just like the bigger ones. And just whenever you want to, you can take your crane to pieces and build a tower, a battleship, a bridge, a fire-escape—anything you like.

MECCANO

Toy Engineering for Boys

Send for This New Meccano Book

It describes Meccano and tells interesting things about model building. Every page a pleasure. Free, if you send names and addresses of yourself and three chums. Put No. 65 after your own name for reference.



MECCANO PRICES

No. 00 Outfit builds 40 models—	\$1.00
No. 0 " " 70 " —	2.00
No. 1 " " 105 " —	3.00
No. 1X with electric motor —	5.00
No. 2 Outfit builds 151 models—	6.00
No. 2X with electric motor —	8.50
No. 3 Outfit builds 195 models—	9.00
and up to \$40.00	

For sale by most department stores, toy, hardware and sporting goods dealers. If your dealer cannot supply you, we will do so on receipt of price.

MECCANO COMPANY, Inc.

Division K-12, Elizabeth, N. J.

In Canada:

Meccano, Ltd., 11 Colborne St., Toronto



SENSATIONAL SALE

GUARANTEED TYPEWRITERS



Limited quantity fully guaranteed standard make typewriters. Five Days Free Trial. Lowest prices ever offered. Easy monthly payments. Send today for FREE booklet of Valuable Typewriter Information and Special Sale Bulletin.

SMITH TYPEWRITER SALES CO.
321-360 E. Grand Ave. Chicago, Ill.



MAKE MONEY AT HOME

15 to 50 Dollars a Week for Your Spare Time. No Canvassing. Experience Unnecessary. Write today for Illustrated Booklet and Free Working Outfit. UNITED SHOW CARD STUDIOS, 807 Dinan Bldg., Detroit, Mich.



No Deposit

Just send your name, address and finger size, and we will send you this beautiful genuine diamond, 14K solid gold ring on approval. Send no money; pay no C. O. D. Merely accept the ring and wear it a week. Then decide—either return the ring and call the deal closed, or keep it and send only \$3.75 a month until our net price of \$38.75 is paid. (Regular \$50.00 value.)

Genuine Diamonds

Each ring is solid 14K green gold, with 18K white gold top, exquisitely hand engraved and set with a fine, large, extra brilliant, perfectly cut, blue-white genuine diamond. Order now—at once! Send name, address and finger size. Also kindly give your age and occupation and say whether you want ladies' or men's ring. Write today!

Harold Lachman Co., 200 So. Peoria Street, Dept. 1789 Chicago, Ill.

WURLITZER

TRADE MARK REG. SUPREMACY IN MUSICAL INSTRUMENTS



Try It in Your Own Home

You may now have any known musical instrument for a week's free trial in your own home. Play it as much as you wish. See how easy it is to learn. There is no obligation to buy; no expense for the trial. You may return the instrument at the end of a week if you decide not to keep it. Wurlitzer instruments are known the world over for unusual tone quality and excellence of workmanship. They are used by the greatest musicians, bands, and orchestras.

Easy Payments

If you decide to buy, the Wurlitzer plan makes it easy for you to own the instrument you want. Payments are conveniently arranged in small monthly sums—a few cents a day will pay.

Special combination offers on complete outfits—velvet lined case, all accessories, self-instructor, etc.—everything you need at practically the cost of the instrument alone.

Free Catalog

The greatest musical catalog ever published—over 8000 articles—every known instrument described and illustrated—many of them shown in full color. Gives you lowest prices and all details of the Wurlitzer plan.

Send this Coupon

The Rudolph Wurlitzer Co., Dept. 1789
117 E. 4th St., Cincinnati 329 So. Wabash Ave., Chicago
120 W. 42nd St., New York 250 Stockton St., San Francisco

Send me, absolutely free, your new illustrated catalog of musical instruments. Also tell me how I may try any instrument in my own home at your expense, and how the Wurlitzer plan makes it easy for me to buy. No obligation.

Name

Address

City State

Instrument
(State instrument in which you are interested.)

Copyright 1935, Rudolph Wurlitzer Co.

Building a Realistic Toy Theater

(Continued from page 123)

can be performed with these figures.

Almost all the backgrounds can be made transparent and quite a number of them can be made movable. A rising moon can be made by cutting a 1-in. strip out of the cardboard sky from the horizon to the top of the picture. Take a piece of black paper about 1 ft. in length and cut it 1 in. wide. In the center cut a small round hole to represent the moon. Paste two strips of cardboard along the cutout in the background, to form a groove for the black paper. Light the back of the stage with a lamp or a flashlight and gently pull the strip of black paper upward. This will give the effect of the rising moon.

Other effects to be obtained are the lighting up of windows, lightning flashes, twinkling stars, moving waters reflecting the rising moon or setting sun, rainbows, and the like. Elaborate cutouts can be glued to netting, which can be used to aid in many novel stage effects. To increase the effect, small toy electric lights may be added. These can be worked either through a transformer or by a set of batteries.

There should be at least two footlights—a blue light and a white light—and two droplights, the first being placed just in front of the first scene and the second in front of the second side scene. By using a dimmer or rheostat connected with the white lights, the lighting can be lowered gradually until the one blue light left burning gives the effect of night. These lighting devices greatly increase the charm of the model theater, especially if the backgrounds have been made transparent.

Yardstick Set in Bench Serves for Rough Measurements

REPEATED handling of a rule at the woodworking bench can be avoided to some extent by inlaying a yardstick in the top of the bench near the front edge.

When the carpenter who devised this method wishes to measure a few feet of



Measuring a length of molding with a ruler inlaid in the bench top

stock, particularly of the molding and lighter materials which he mostly handles, he simply runs it close against his bench parallel with the ruler and marks off the length.—FRANK V. FAULHABER, Brooklyn, N. Y.

SEND NO MONEY 2 GENUINE DIAMONDS $\frac{1}{100}$ Each

(Cut Stones—No Chips)

Solid Gold \$25

14 Kt. White Gold Top, Gold Initial or Emblem Inlaid in



Genuine Hope Ruby

This Registered Trade Mark guarantees you genuine diamonds.

Can be had in all initials (Old English); also in all lodge emblems.



Send size of finger and ring will be sent for inspection.

Buffalo Jewelry Mfg. Co., "The Mail-Order House" Dept. A, Brisbane Bldg., Buffalo, N. Y.

THE NEWEST SIMORE TOOL

"Lightning-Change"



Combination KNIFE and screwdriver—a keen steel knife blade, and two screwdriver blades in the handle—blades selected and produced by gravity, the knife blade can never fold or turn and injure you, change blades in two seconds.

This Combination KNIFE and screwdriver will be sent you post prepaid for only \$2.25, check or money order. The only tool of its kind, ideal for radio fans, carpenters, motorists, and for household use. Order TODAY.

\$2.25 PREPAID

Dealers are invited to write for proposition on this and other Simore tools.

THE SIMON & SKIDMORE MFG. CO. Dept. 512 Santa Ana, Calif.

The New Ace Type 3 B

A new member of the Ace family selling for \$50, which is equal to a combination of the Ace Type V and the Ace two-stage amplifier. Like the Ace Type V it is manufactured under Armstrong U. S. Patent No. 1,113,149. This set is new, but months of research work have brought it to a high degree of perfection. Out-performs receiving sets costing great deal more. A filament switch eliminates necessity of turning out rheostats when set is not in use. A person hearing a broadcasting station may turn off the set by throwing switch and come back later without retuning. A telephone jack is between first and second stage of amplification. This is for use of persons who desire to use head phones instead of loud speaker. Crosley Multistats, universal filament control rheostats for all makes of tubes, also are used in the Type 3B. Price, \$50

The Precision Equipment Company

Powel Crosley Jr., Pres. 1217 Vandalia Avenue, Cincinnati, Ohio

FREE RADIO BOOK

An easily understood explanation of Radio written by Powell Crosley Jr., President of Crosley Mfg. Co., Cincinnati, and The Precision Equipment Co., Cincinnati.

Write today for this Booklet.

CROSLY MANUFACTURING CO. 1217 Alfred St. Cincinnati, O.

Learn to Mount Birds

Learn at home to mount birds, animals, game heads; tan furs, make rugs and robes. Complete lessons. Easily and quickly learned by men, boys and women. Write for Free Taxidermy Book. Tells all about it. Every sportsman, trapper and nature lover should know this wonderful fascinating art. Save your trophies. Big profits. Success guaranteed. 25,000 graduates. Investigate. Write for Free Book. Northwestern School of Taxidermy 1789 Elwood Bldg., Omaha, Neb.

Fairy Figures Form Novel Christmas-Tree Stand

CHRISTMAS trees in Europe, where so many of our Yuletide customs originated, are usually gathered and sold with the roots attached. They are then set up in a large pot or tub, according to size. This has advantages, from a picturesque standpoint, over the American practice of mounting Christmas trees on a stand of two crossed sticks.

More novel than either method is to have some pixies or fairies holding the tree upright. Three or four of these, as shown in the accompanying illustration, can be cut from thin wood (three-ply paneling is best) with a fretsaw or a sharp



Cut from plywood and gaily painted, these figures make an attractive support for the Yule Tree

knife and painted as decoratively as possible. These figures do not require a solid base; a diagonal brace between them will be ample. Flat pieces may be nailed to their backs, if desired, to make it easier to attach them to the tree trunk.

Another method is to make the figures like big dolls, but with stiff wire along the legs and up the backs, passing out through the shoulders and round the stem of the tree, with perhaps a sash right around them all for a lower support.

Make the figures large enough to form a steady support, say 18 in. high for a 6-ft. tree.—E. A. M.

FEATURES FOR JANUARY

NO MATTER what particular aspect of the home workshop interests you most, you will find exceptionally useful articles relating to it in next month's POPULAR SCIENCE MONTHLY.

First there are the prize-winning letters in the recent tool contest.

Then, for the woodworker, there are articles on how to build an ideal home workshop wall cabinet for tools and a combination bench hook, miter block, and shooting board; on weatherstripping your home, and on rebuilding a pedestal dining table.

Those interested in outdoor sports will find unusually good plans for a non-tipping bobsled and a racing skate sail.

For the children, there is a child's kitchen cabinet; for the typist, a cheap method for making rubber keys. Similarly, for the autoist, the radio fan, and the metal worker, there is a great wealth of helpful material.

"American Flyer" Railroads and "Structo" Automobiles

Here's great news, boys and girls—this year we have made more "American Flyers" than ever before, so every Toy Store in your town can get a supply. We are also selling "Structo Autos"—you can buy them "Ready Built" or you can get them "Knocke! Down" and put the parts together yourself. Remember, The American Flyer Company GUARANTEES all trains to be electrically and mechanically perfect. If any Toy Store hasn't got the "American Flyer" or "Structo" outfit that you want we will ship any of the trains, autos or equipment illustrated, post-paid on receipt of cash.

A full line of both electrically and mechanically operated "American Flyer" Miniature Railroads at the best Toy Stores. Take this Magazine to your Toy Store and ask to see these Trains and Autos.

No. 1221—Electric Engine, with headlight, 8 inches, 3 double-track cars, 6½ inches. 14 pieces of track; semaphore, station, tunnel; rheostat and track connection. Length of train, 31 inches. Price, delivered, \$11.00

No. 2—Mechanical Engine, with brake and piston rods, 6½ inches, tender 4 inches, cars 5½ inches; baggage car has sliding doors; 10 pieces of track; length of track, 103 inches; length of train, 24½ inches. Price, delivered, \$2.65

No. 44 "STRUCTO" Ready-Built Caterpillar Tractor. Complete as shown with disc harrow attached. Operated by a powerful motor. Works just like a real tractor. Measures 11 inches over all. Price, delivered, \$4.00

No. 12 "STRUCTO" De Luxe Auto. Complete construction outfit—all parts ready to put together. Makes a car 16 in. long, as illustrated below. Price, delivered, \$10.00

No. 13—Mechanical Engine, with brake and piston rods, 7 inches, tender 4 inches, cars 5½ inches; baggage car has sliding doors; 12 pieces of track, 2 switches; length of track, 160 inches; length of train, 25 inches. Price, delivered, \$4.00

SEND TEN CENTS and we will mail you beautifully illustrated catalogue showing the full line of "American Flyer" trains and "Structo" Autos. We will also send free Horace Wade's famous story about "The Backyard Railroad"—how to build one and have loads of fun. You can operate a regular system of land transportation with "American Flyer" Trains and "Structo" Automobiles.

AMERICAN FLYER MFG. CO., 2237 South Halsted St., Chicago, Ill.

Ask the Toy Store to show you this "American Flyer" Electric Train—the engine is an exact copy of the New York Central Electric Locomotive—the only electric engine that will reverse itself automatically whenever you want it to.

No. 1307—Electric 12-Wheel Engine, with headlight and automatic reverse, mail car, 2 Pullmans, all electric lighted, 20 pieces of track; rheostat and connection; length of train, 48 inches, length of track, 202 inches. Price, delivered, \$27.00

Station—No. 103 \$2.10

De Luxe Auto—No. 12 \$10.00

Station—End of Line—Take Structo Auto for home

De Luxe Auto—No. 12 \$10.00

Semaphore—No. 202 \$2.00

Transformer—No. 1250 \$3.00

All clear! Go ahead!

LEARN RADIO

Get into the world's greatest field of profit and pleasure. Big money-making opportunities. Easy to learn. Trained men are in demand—mechanics, operators, designers, inspectors. Qualify for these high salaried positions, or make big money in your spare time. Unlimited possibilities on land and sea.

I WILL TRAIN YOU AT HOME TO BE A RADIO EXPERT

You, too, can learn, quickly and easily, to design, construct, install, operate, repair, maintain and sell all forms of Radio apparatus. No previous experience necessary. My methods are the latest and most successful in existence.

FREE Wonderful home construction tube receiving set, of the latest design. **Write Today "Radio Facts" FREE**

A. G. Mohaupt, Radio Engineer, AMERICAN RADIO ASS'N, Dept. 412, 4513 Ravenswood, CHICAGO

LEARN—High Paid Profession NEW EASY TRADE

Lifts Men out of Small Pay Jobs

*Are you Satisfied with your Job?
Have You got all the Money you Want?*

**If Not, Send for My Big New Free Book
and learn how to**

Earn \$50 to \$150 Each Week

No matter what you are doing now, no matter how much your present earning is, our amazing new system of training for the barbering profession is a sure and steady source of bigger earnings.

Learn in a Few Weeks—Double Your Income

Put yourself in the big pay class. Get expert training under the Moler System experts. Be master of a trade in which there are not enough highly skilled men to fill the jobs now open. The Moler System gives you a practical, super-training in barbering. Just a few hours a week for a very short period and you get a thorough training under the personal direction of Moler experts. Start today—in a few short weeks you'll be earning \$50 to \$150 a week.

Write for Free Book

Our illustrated book that we mail free tells how we enable you to earn while learning, how we put you into the best city jobs, how we equip your shop on easy payments. In fact, how we take you just as you are, make your life's work easier, better paying and more independent. We have 33 branch schools in leading cities. We have one near you.

I Give You a Real Training

As owner and chief instructor of the Moler System, I know exactly the kind of training a man needs to get the steady business and big earnings. Hundreds of my students are now earning \$3,500 to \$8,000 a year. Many own the biggest and best shops in their town.

**Write Today! Nearest Branch
Moler System of Colleges**

33 Branches

157 Third Ave. New York, N. Y.	110 S. 14th St. Omaha, Neb.
185 S. Wells St. Chicago, Ill.	513 E. Water St. Milwaukee, Wis.
810 N. 6th St. St. Louis, Mo.	1005 Canal St. New Orleans, La.
544 Main St. Kansas City, Mo.	23 N. Forsyth St. Atlanta, Ga.
206 E. 4th St. Cincinnati, Ohio	89 N. 2nd St. Memphis, Tenn.
215 Huron Rd. Cleveland, Ohio	910 Main St. Dallas, Texas
1045 Cass Ave. Detroit, Mich.	712 Franklin Ave. Houston, Texas
1229 17th St. Denver, Colo.	727 W. Commerce St. San Antonio, Texas

What Moler System Means to You

Everywhere there is a big demand for Moler trained barbers. Our national advertising educates the public to the safety, cleanliness and comfort of the Moler System. It makes you the sought-after barber in your locality. It keeps your chairs filled and turns profits into your pocket. You as graduate are a part of a national institution which assures steady, profitable business. Through no other method can you get this.

Easy Work—Always Busy—Big Pay

A trade that enables you to travel and see the world—one that pays in tips and commissions in addition to salaries. Moler System graduates are in great demand and have no trouble in securing good jobs.

Moler System of Colleges

(WRITE NEAREST BRANCH)
Please send without obligation your Free Booklet C and full information.

Name.....

Address.....

Squab Book FREE

Squabs selling at highest prices ever known. Greatest market for 20 years. Make money breeding them. Raised in one month. We ship everywhere our famous breeding stock and supplies. Established 23 years. Write now for big illustrated free book, How to Make Money Breeding Squabs. **PLYMOUTH ROCK SQUAB CO.** 616 H St., Melrose Highlands, Mass.



DO YOU LIKE TO DRAW? CARTOONISTS TRAINED BY W. L. EVANS MAKE MONEY

Some of the cleverest cartoonists are former students. They had no experience before enrolling, but worked at the lessons during their spare time and found **CARTOONIST EVANS' METHOD "easy to learn"** and are now making good money. It is not hard to learn to draw originals when shown in a practical way.

The School is recommended by well known cartoonists because they know the students are handled right.

If you like to draw and want to be able to sell your drawings, send a sample of your work (either a copy or an original) and let us see what you can do. We will send you the portfolio of cartoons and full details about the school.

The Course is NOT EXPENSIVE



**THE W. L. EVANS SCHOOL
OF CARTOONING**

825 Leader Bldg., CLEVELAND, OHIO

ARITHMETIC OF ELECTRICITY

A practical treatise on electrical calculations of all kinds reduced to a series of rules, all of the simplest forms, and involving only ordinary arithmetic. 200 pp. Price, \$1.50.

POPULAR SCIENCE MONTHLY
224 W. 39th St. :: :: NEW YORK

TYPEWRITER PRICES CUT
World's best makes—Underwood, Remington, Oliver—prices slashed to almost half.
\$2 and it's yours

All late models, completely rebuilt and re-finished brand new. GUARANTEED for ten years. Send no money—big FREE catalog shows actual machines in full colors. Get our direct-to-you easy payment plan and 10-day free trial offer. Limited time, so write today. International Typewriter Exch., 177 N. State St., Dept. 12-49, Chicago



\$50,000.00

Reward Dead or Alive

Toronto, Can., Millionaire Missing

BE A DETECTIVE Be a

Print Specialist. Learn Scot-

land Yard Methods. Experi-

ence not necessary. Write to-

day for FREE illustrated

booklet

United Detective Training Ass'n,

807 Dinan Bldg., Detroit, Mich.

MAKE FORD INTO THIS SPORT CAR ONLY \$6.40

Other types down to \$3.50. Famous sure fit, **Patented** life-

size patterns and picture instructions show how. You can

easily convert your Ford into this fast, **sassy Sport Car**

as hundreds have done with a few

dollars worth of material from the

hardware store. No

need to lay up

the car. The

"PAL" with

conical disc

when set in

position. Pressed

Metal Streamline

Rear only \$6.40 deliv-

ered. Built low

rides wonderfully easy. Order NOW while we can make good

delivery. Send 50 cents for illustrated prospectus of Sport Bodies.

"Jiffy" Tops and "Gowen" Windshields.

KUEMPEL CO., 524 Kuempel Bldg., Guttenberg, Iowa

A Radio Set for Christmas

(Continued from page 80)

points of contact with the binding posts, is then used to join the contacts numbered 1 of rheostats *D* and *Q* with binding post *U*₁. The No. 2 contact post of rheostat *D* is then connected with the remaining *F* terminal of socket *H*, while another wire is used to connect the remaining *F* terminals of sockets *N* and *T* with contact post No. 2 of rheostat *Q*. By means of these connections, rheostat *D* is used to control the filament current of the detector tube in socket *H*, while rheostat *Q* controls the filament current of both amplifier tubes.

Now connect the *P* terminal of transformer *I* with the inside jack spring of jack *J*, which makes contact with the outside spring, to which one of the leads from rotor winding *L* is connected. The other inside terminal of the jack is connected with the *B* terminal of transformer *I* and the remaining outside terminal is connected with binding post *U*₂.

The *F* terminal of transformer *I* is connected with binding post *U*₄, and the *G* terminal of the transformer with terminal *G* of socket *N*.

How to Wire the Jacks

The *P* terminal of socket *N* is connected with the top outside spring of jack *P* and the inside spring of the jack, which makes contact with this spring, is connected with the *P* terminal of transformer *O*. Binding post *U*₅ is connected with the bottom outside spring of the jack, while the inside spring, which makes contact with it, is connected with the *B* terminal of transformer *O*.

The *G* terminal of transformer *O* is then connected with the *G* terminal of socket *T*, and the *F* terminal of the same transformer is connected with binding post *U*₆. The wiring of the set is completed by connecting the top spring of jack *S* with the *P* terminal of socket *T* and the bottom spring of the jack should be connected with binding post *U*₇.

The type of A battery employed will naturally vary with the type of tubes that are used. Best results will be obtained when a soft six-volt tube of the UV-200 or C-300 type is used as a detector and hard tubes of the C-301-A or UV-201-A types are used as amplifiers. If a soft tube is used as a detector, rheostat *D* should be of the Vernier type. In this particular set, however, dry cell tubes of the UV-199 or C-299 type are used throughout and give excellent results, both for distance and strength of signals.

The minus or negative terminal of the A battery is connected with *U*₁. The positive of the A, the negative of the B, and the positive of the C batteries are connected with binding post *U*₂. If a soft tube is used as a detector, the 22½-volt terminal of the B battery is connected with binding post *U*₃, while if one of the hard tubes is used as a detector tube, the 45-volt terminal of the B battery should be connected with that binding post.

The leads from binding posts *U*₄ and *U*₅ are tried on various terminals of the C battery until the best value of the grid

(Continued on page 127)

PATENTS TRADE-MARKS AND COPYRIGHTS

SPECIAL OFFER FREE OPINION AS TO PATENTABLE NATURE

BEFORE disclosing an invention, the inventor should write for our blank form "Record of Invention." This should be signed, witnessed and returned to us with model or sketch and description of the invention; we will give our opinion of its patentable nature.



Our Three Books Mailed Free to Inventors

Our Illustrated Guide BOOK

HOW TO OBTAIN A PATENT

Full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described.

OUR TRADE MARK BOOK

Shows value and necessity of Trade Mark Protection. Information regarding *Trade Marks and unfair competition in trade.*


OUR FOREIGN BOOK

We have Direct Agencies in Foreign Countries, secure Foreign Patents in shortest time and lowest cost.

**ALL COMMUNICATIONS AND DATA STRICTLY CONFIDENTIAL
INTERFERENCE AND INFRINGEMENT SUITS PROSECUTED**

VICTOR J. EVANS & CO.

VICTOR BUILDING
724-726 NINTH ST., N.W.

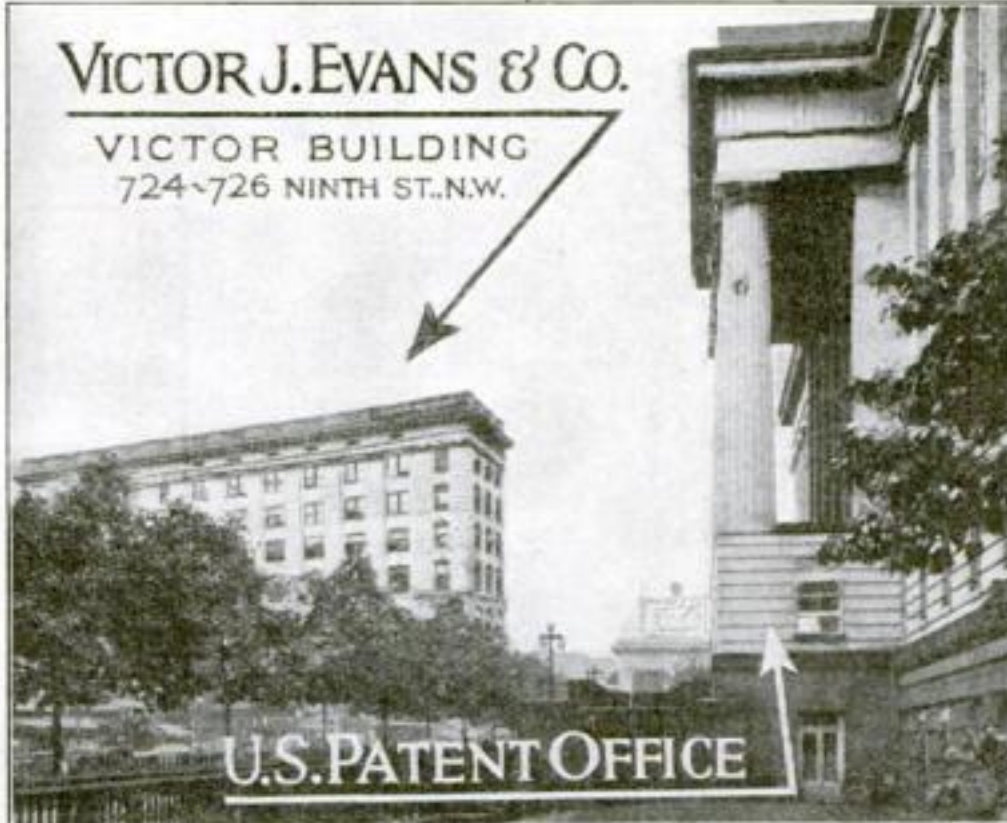

View from 9th and F Sts. corner of U. S. Patent Office showing location of Victor Building

Highest References Prompt Attention Reasonable Terms

VICTOR J. EVANS & CO., Patent Attorneys

Main Offices: 760- 9th Street, N.W., Washington, D. C.

Gentlemen: Please send me FREE OF CHARGE your books as described above.

**FREE
COUPON**

Name.....
Address.....



New York Office
Suite 1007 Woolworth Bldg.



Philadelphia, Pa., Office
Suite 714-715 Liberty Bldg.



Washington, D. C., Office
Victor Bldg.



Chicago, Ill., Office
Suite 1114 Tacoma Bldg.



Pittsburgh, Pa., Office
Suite 514 Empire Bldg.



San Francisco, Cal., Office
Suite 1010 Hobart Bldg.

Do You Believe in Luck?

Thousands waste the best years of their life waiting for some "stroke of luck" to make them successful. Two men starting exactly alike as babies with the same kind of attention—then as boys with the same advantages of education—then as young men feeling around for a start in life—and then after the final test as

At the Age of 2



He believes in Luck He in Himself

At the Age of 20



He still believes in Luck —and He in Himself

At the Age of 30



Beginning to doubt His Luck Sure of Himself

At the Age of 40



Out of Luck A Big Success

At the Age of 60



Down and Out Well Provided

men, one is a failure, the other a big success. Is it luck? No indeed.

Luck vs. Self

The one who succeeded believed in himself. He grabbed his opportunities as he saw them and made good because he was prepared. He planned his progress step by step and fitted himself with special training for the line of work he wanted to follow and liked the best. The other fellow—the failure—blinded by his unreasoning belief in luck that never came, could only say: "That man sure was born lucky."

There Is No Luck

Luck is exactly what you make it. There is an old saying—"Those who have—get." The more you go after and get for yourself instead of waiting for "luck" to come, the more good fortune is forced on you. Those who are patiently waiting for something good to turn up are invariably disappointed in life—those who know that they can make their own good fortune always find plenty of it waiting.

Stop Idle Dreaming

Take action and make your dreams come true. Make up your mind to be a success in that line of work or profession you like best—get the special training that will fit you. Do this and you will make your own good luck. But remember, the big thing is to be prepared—to have the special training that will enable you to make use of the many opportunities that will surely come your way just as soon as you have unbounded faith in yourself. Now take the first and really most important step in making your own good luck by sending in the coupon. This puts you under no obligation and no agents will bother you.

American School

Drexel Ave. & 58th St. Chicago
Dept. G975 © A.S. 1923

American School, Dept. G 975
Drexel Ave. & 58th St. Chicago
Send me full information on how I can best succeed in.....

(Write in here what line of work or profession you like best)
This request is to put me under no obligation and no agents are to bother me.

Name

Address.....

(Use margin of this magazine if you need more space to write)


How to Make a Sportsman's Pair of Skis

By Howard Greene

IF YOU are interested in skiing, which is becoming more popular every winter, you can make quite easily a pair of skis that will look well and give excellent sport. The raw material consists of a spruce board 6 ft. 6 in. long, 8 in. wide, and $\frac{3}{4}$ in. thick. The length is a good average; a tall man will need a little more and a short man a little less.

Mark two lines across the board, one 2 ft. from one end and the other 3 ft. 6 in. from the other end. Have the mill or a woodworking shop, if possible, saw a taper from these lines to the ends, so that when planed smooth the board will be $\frac{1}{8}$ in. thick at the end of the long taper and $\frac{1}{4}$ in. thick at the end of the short taper.

The board next is ripped down the center. Then a groove is cut down the center of each piece, extending to within

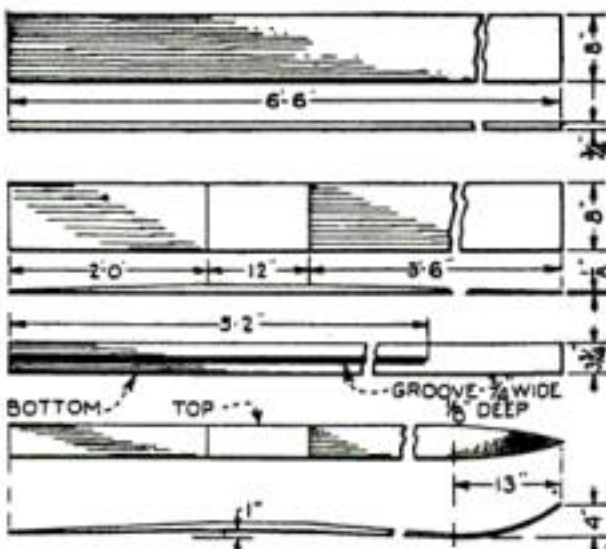

Progressive diagrams showing how the spruce is tapered, cut, grooved and bent

16 in. of the thin end, which is to be the front. The groove is made on the bottom—that is, the side opposite the tapers. The mill can do this sawing and grooving in a few minutes, but it would take hours to do by hand.

Plane and sandpaper the bottoms perfectly smooth, and smooth up the grooves with sandpaper on a rounded block. Work down the wood on the top of each ski until the edges are rather thin—about half the original thickness—while the center is left almost full thickness. Do this in front of and behind the 12-in. part that has been left the full thickness of the original board. Finish with fine sandpaper and cut the points. The skis are then ready for bending.

Make a bending form on a bench or heavy plank, as shown. Soak the wood in very hot water for three or four hours. This may be a problem, but perhaps the bathtub can be used. In that case the full length cannot be immersed at once and it will be necessary to reverse the skis every half hour or so, keeping wet cloths around the exposed wood so that it will not dry. This will prolong the soaking considerably. Steaming is better and quicker, and a small steambox fed with steam from a kettle is so easily made and used that it is worth the trouble.

Clamp the skis on the form with strips of wood extending across both at once. See that the points are supported for their

(Continued on page 133)

CAN YOU

think of a simple, practical idea that will fill one of the many requests we have on file for new inventions? It may mean a fortune for you. Thousands of things are needed RIGHT NOW. Your brains can help. Send today for our great new book—"Inventions and Trade Marks, Their Protection and Exploitation" and learn more about making money from ideas than you ever knew before. It tells many things that are wanted, too. A postal will do—it is free.

We help our clients, without charge, to get the dollars out of their ideas—having facilities none others possess.

Advice free. Don't delay—get the book at once.

AMERICAN INDUSTRIES, INC.

201 Patent Dept., WASHINGTON, D. C.

PATENTS ADVERTISED For SALE FREE In INVENTION And MANUFACTURING SUPPLEMENT.

Published for the man with an idea. Send for free sample copy. One year's subscription 50c.

Stop Using a Truss



Reduced Fac-Simile Gold Medal

STUART'S PLAPAO-PADS are different from the truss, being mechanical-chemical applicators made self-adhesive purposely to hold the distended muscles securely in place. No straps, buckles or spring attached—cannot slip, so cannot chafe or press against the pubic bone. Thousands have successfully treated themselves at home without hindrance from work—most obstinate cases conquered.



Reduced Fac-Simile Grand Prix

Soft as velvet—easy to apply—inexpensive. Awarded Gold Medal and Grand Prix. Process of recovery is natural, so afterwards no further use for trusses. We prove it by sending Trial of Plapao absolutely FREE. Write name on Coupon and send TODAY.

Plapao Co., 790 Stuart Bldg., St. Louis, Mo.

Name
Address
Return mail will bring Free Trial Plapao.

HAVE YOU AN INVENTION?

If so the WORLD PROGRESS will show you how to

Protect and Profit From Your Ideas

Sample copy free. One year's subscription \$1.00. Send for free book.

"WHAT TO INVENT"

containing Suggestions to Inventors as to Inventions Needed. We invite manufacturers to address us regarding inventions they want.

WORLD PROGRESS PUB. CO., INC.
Room 202 Victor Bldg. Washington, D. C.

INVENTORS

who derive largest profits know and need certain simple but vital facts before applying for Patents. Our book Patent-Sense gives those facts; free. Write Lacey & Lacey, 648 F St., Washington, D. C. ESTABLISHED 1869.

20¢ A DAY PAYS for a Piano

Before you buy a Player-Piano or Piano, get our beautifully illustrated FREE Book showing popular models of famous sweet-toned Symphonics. Easy payments. Save \$100 or more. 25-year Guarantee. Write TODAY. Larkin Co. Inc. Dept. P-1240 BUFFALO, N. Y. Peoria, Ill. Chicago, Ill.


To Make a Pair of Skis

(Continued from page 132)

full width, to avoid splitting while drying. Allowance should be made for the springing back of the wood when removed from the form, say 1 in. extra for the long curve of the body and 1½ in. for the point.

Allow plenty of time for drying; a week is not too much, and damp weather will retard the drying. When dry, give all but the bottom two coats of spar varnish and rub the bottom with hot beeswax, polishing it well with a rag.

There are several types of foot harness, and any kind that strikes the fancy may be copied. The one shown, however,

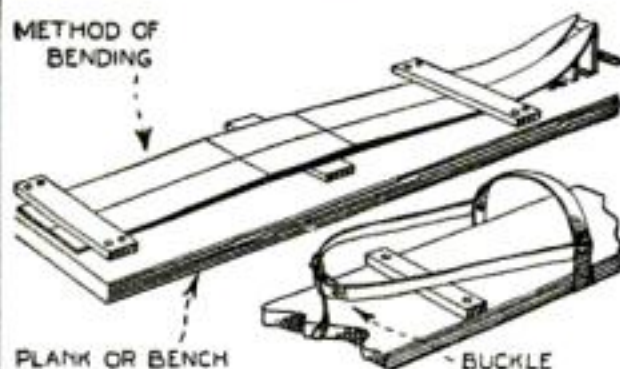

The form for bending the skis and one simple design for the foot harness


works very well and is easy to make. The toe straps are fastened at the sides with long brass screws with round heads and copper washers under the heads, or they may be passed through slots cut through the wood. The heel straps are riveted to the toe straps with copper rivets.

A pole can be made of either spruce or hard wood; spruce is lighter and strong enough. It may be from 1¼ to 1½ in. in diameter, and of a length to suit the user. A good length is about 5 ft. The usual ring may be made from a large, heavy brass curtain ring, attached to the staff by four leather strips. Wet the leather, pass it around the ring, and rivet it so that it will hug the ring as tightly as possible. Bind the other ends of the strips to the staff with fish-line or the like. When the leather is dry, it will shrink and hold hard on the ring. Then give it a good soaking with neat's-foot oil.

Drive a brass ferrule into the other end of the staff, and put in a long, heavy wood screw to the full depth of the threads. Cut off the head and file the shank to a point.

Cheap Photo Film Clips

EXCEL- LENT clips for photo films can be made cheaply from ordinary brass showcard hangers. About half the loop of each hanger is cut out, as shown,



with a pair of scissors. These hangers may be used to suspend films in the tank for development, in the fixing bath, in the washing tank, and finally on the line for drying. If desired, the hangers can be numbered with steel stamps, so that the films can be readily identified.—J. A. M.

EXPERIENCE SERVICE

CLARENCE A. O'BRIEN

PATENT ATTORNEY

REGISTERED IN UNITED STATES PATENT OFFICE
MEMBER OF THE BAR OF
SUPREME COURT OF UNITED STATES, COURT OF APPEALS DISTRICT OF COLUMBIA,
SUPREME COURT DISTRICT OF COLUMBIA, UNITED STATES COURT OF CLAIMS.
PRACTICE CONFINED TO PATENTS AND TRADE MARKS.

PATENTS & TRADE MARKS

Protect Your Ideas

ANY NEW article, machine, design or improvement thereof, or any new combination of parts or improvements in any known article which increases its efficiency or usefulness, may be patented, if it involves invention.

If You Have Any New Ideas

which you feel are useful, practical and novel, take prompt action to protect your rights. If you have invented any new machine, or new combination of parts, or improvement, or any new design or process, SEND DRAWING, MODEL OR DESCRIPTION of it for information as to procedure to secure protection.

Write Today for Blank Form "Record of Invention"

USE THE COUPON attached, and immediately upon its receipt I shall send you this form to be returned to me with drawing, description or model of your idea; promptly upon receiving your idea I shall write you fully as to procedure and costs.

No Charge for Above Information

All communications are held in strict confidence. My personal, careful and thorough attention is given to each case. I offer you efficient, reliable and prompt service—based upon practical experience. Highest references.

WRITE TODAY for free book "How to Obtain a Patent." This book will give you valuable information, and it may save you much time and effort. Send for it NOW.

My practice is devoted exclusively to United States and Foreign Patents and Trade Marks. Write me freely, frankly and with full confidence; it is very probable that I can help you. **Write TODAY.**

CLARENCE A. O'BRIEN, Registered Patent Attorney, Washington, D. C.
345 Security Savings & Com'l Bank Bldg., directly across street from U. S. Patent Office.

CLARENCE A. O'BRIEN, Registered Patent Attorney, Washington, D. C.
345 Security Savings & Com'l Bank Bldg., directly across street from U. S. Patent Office.

Please send me your free booklet "How to Obtain a Patent" and blank form "Record of Invention" without any obligation on my part.

NAME.....
ADDRESS.....
(Write clearly)

HOW TO OBTAIN A PATENT

\$25.00 in Prizes

See top of page eight in front of book for details

Radio Phone Receiving A practical book for everybody. Written in non-technical terms by nine specialists. 224 pages. Fully illustrated. Price \$1.50. Popular Science Monthly, 225 W. 39th St., New York

PATENTS
TRADE-MARKS, COPYRIGHTS AND PATENT LITIGATION
Write for advice and instructions how to proceed, costs, etc.
Hand Book with illustrations of 100 Mechanical Movements sent free on request.
ALBERT E. DIETERICH
Patent Lawyer and Solicitor
Successor to Fred G. Dieterich & Co.
30 Ouray Bldg. WASHINGTON, D. C.


PATENTS
BOOKLET FREE HIGHEST REFERENCES
PROMPTNESS ASSURED BEST RESULTS
Send drawing or model for examination and report as to patentability
WATSON E. COLEMAN, Patent Lawyer
624 F Street N. W., Washington, D. C.

PATENTS

IF YOU HAVE AN INVENTION and DESIRE TO LEARN HOW TO SECURE A PATENT, send for Our Guide Book, HOW TO GET A PATENT, sent free on request. Tells our Terms, Methods, etc. Send model or sketch and description of your invention and we will give our opinion as to its patentable nature.

NAME.....
STREET.....
CITY..... STATE.....

RANDOLPH & CO.
130 F St., N. W. Washington, D. C.

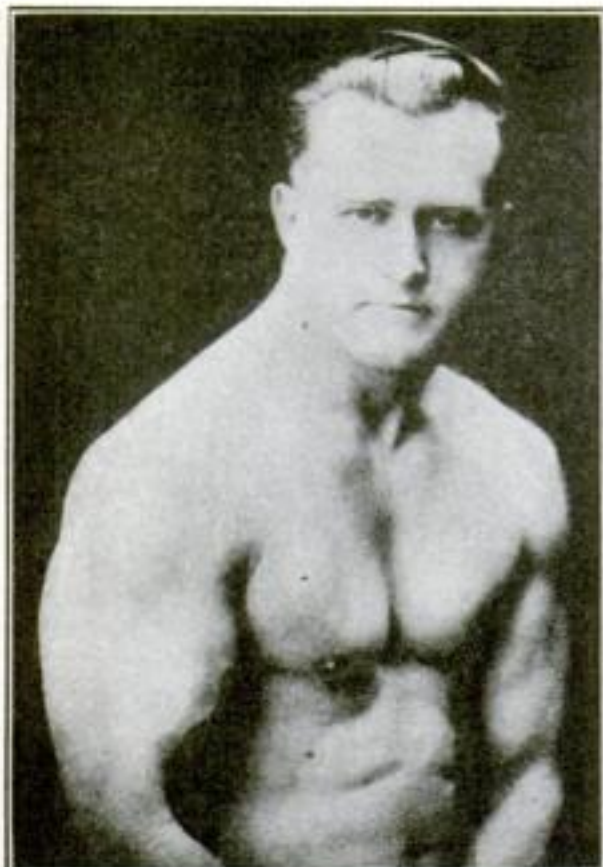

EARLE E. LIEDERMAN
as he is today

Call the Undertaker!

What's the use of living when you're only half alive? You get up in the morning and you don't have the pep of a jelly fish. Your work is a burden and life has ceased to give you a thrill. You don't seem to get anywhere and nobody cares whether you do or not. What's the use, fellows? Call the Undertaker, for you're dead and you don't know it.

A New Life

Stop! It's all wrong. There is another life right here before you. A new and a better one. A life that is full of thrills and sunshine. Every day opens new worlds to conquer, new joys, new friends and lasting ones. Come with me and let me guide you to it.

I have a system that knocks those gloom bugs higher than a kite. I'll put pep in your old backbone that will make you feel like a jack rabbit. I'll put a spring to your step and a flash to your eye so that your own friends won't know you.

Health and Strength

That's what you need and that's what you get. Come on now, pull in your belt and throw out your chest. Take a good deep breath of that pure air that's all about you. Give your heart a treat with some rich blood. You will feel so good you will think it's your birthday. Drop me a line and I'll show you how to do it. I'm going to put a chest on you that will make your old ribs strain with the pressure. I'm going to change those skinny arms and legs of yours to a real man's size. You will have the strength and vitality to do things you never thought possible. Come on, fellows! Get busy. I don't promise these things—I guarantee them. Are you with me?

Send for My New 64-Page Book "MUSCULAR DEVELOPMENT"

It contains forty-three full page photographs of myself and some of the many prize winning pupils I have trained. Some of these came to me as pitiful weaklings, imploring me to help them. Look them over now and you will marvel at their present physiques. This book will prove an impetus and a real inspiration to you. It will thrill you through and through. All I ask is ten cents to cover the cost of wrapping and mailing and it is yours to keep. This will not obligate you at all, but for the sake of your future health and happiness, do not put it off. Send today—right now, before you turn this page.

EARLE E. LIEDERMAN
Dept. 1312, 305 Broadway, New York

EARLE E. LIEDERMAN
Dept. 1312, 305 Broadway, New York City

Dear Sir: I enclose herewith 10 cents for which you are to send me, without any obligation on my part whatever, a copy of your latest book, "Muscular Development." (Please write or print plainly)

Name.....

Address.....

City..... State.....

The Shipshape Home

How to Do the Odd Jobs

Files and Filing

No HOME workbench or tool cabinet is complete without a number of files of different sizes and shapes. For an all-around set of files for the home, I should suggest the following:

- 10-in. flat wood file
- 10-in. half-round wood file
- 10-in. hand file, second cut
- 10-in. hand file, smooth
- 6-in. hand file, smooth
- 8-in. pillar file, second cut
- 10-in. half-round, second cut
- 6-in. half-round, second cut
- 6-in. round, second cut
- 6-in. handsaw file, double cut, second cut

This set with handles would cost, I estimate, about \$7. It goes without saying that it is economy to pick out the best files that can be obtained. A dollar or two more doesn't count in this case, as poor files will not last very long. The files listed will cover almost any job the home



worker will be called on to do, whether repairs, making new articles, or sharpening garden and other tools.

In use a file should always be kept biting; that is, cutting. If the file is allowed to slide half-heartedly over the work, it soon becomes dulled or shiny. On wrought iron or soft steel greater pressure is required to prevent it from glazing or slipping than on cast iron or steel.

To file a narrow surface straight requires considerable practice. When the file begins its stroke, the downward pressure exerted by the left hand holding the outer end should be at its maximum, while a minimum pressure is given by the right hand, which holds the handle. As the file advances, the pressure from the left hand decreases, while that of the other hand increases. After considerable practice, one is able to regulate the pressure on each end of the file unconsciously, so that any "rocking" motion of the file is prevented.

Amateur mechanics sometimes find confusing the various names used in describing files. Terms such as "mill," "flat," and "half-round," refer to the shape or style, that is, the cross section. The cut is referred to by two sets of terms. One refers to the character of the teeth, which may be "single cut," "double cut," or "rasp cut."

(Continued on page 135)

WHITING-ADAMS BRUSHES

Vulcan Rubber Cemented Shaving Brushes

True friends of shavers and razors. Easy shaves and smooth skins. Bristles, hair and handles never part company. Held with pure rubber vulcanized as hard as granite. Sterilized completely, sealed singly in packages. Infection cannot come from them.

Send for Illustrated Literature
John L. Whiting-J. J. Adams Co.
Boston, U. S. A.
Brush Manufacturers for Over 114 Years and the Largest in the World

YOU CAN PLAY THESE IMMEDIATELY!

A Remarkable Bargain for Lovers of Music

Here's your chance to own a musical instrument you can really play. No lessons necessary; anyone can play at once and become popular at parties and dances.

This handsome CLARINETTE is the latest European invention. A sensation everywhere. Only \$2.33.

Do you like Jazz? Then send for this handsome new SAXOPHONE. No need to pay \$55 when you can own this handsome nickel-plated instrument for

Only \$5.28

Play real music in clear, mellow tone. Popular Songs and Easy Instructions Free with Each Instrument.

SEND NO MONEY

—merely your name and address—and pay the postman on delivery. Mail your order today and receive either one of these bargains by return mail. Payments must be sent with all Canadian and foreign orders. Special Combination Offer—\$6.61 for both.

Free Catalog of Ukuleles, Banjos, Mandolins, Guitars, Accordions, Violins and others.

THE BENSBRAGG STUDIOS
Dept. 20-D,
212 Fifth Avenue, New York

Imperial Sanitary Floor

Put on like Plaster
Wears like Iron
-waterproof
-fireproof
-resilient
-noiseless
-dustless

Base and Floor one solid piece

A composition material easily applied in plastic form over practically any kind of floor. Laid about 1/8 inch thick, Imperial Floor does not crack, peel or come loose from foundation. A continuous, fine grained, smooth, non-slipping surface. No crevices to gather grease, dirt, dust, disease germs or moisture.

Ideal Floor for Kitchen, Pantry, Bath Room, Laundry, Porch, Garage, Restaurant, Theater, Hotel, Factory, Office Building, Railroad Station, Hospital—wherever a beautiful, substantial floor is desired. Several practical colors. Full information and sample FREE of your first and second choice of color.

Imperial Floor Co., 166-168 Halstead St., Rochester, N. Y.
A Success for 15 Years

HAIR GROWS!



When our Vacuum Cap is used a few minutes daily. Sent on 60 days' FREE trial at our expense. Stops falling hair and dandruff. Science combined with common sense. No drugs or electricity. A postal brings illustrated booklet.

Modern Vacuum Cap Co.
400 Barclay Denver, Colo.

The Shipshape Home

(Continued from page 134)

The other designations are for the degree of coarseness of the teeth—"rough," "coarse," "bastard," "second cut," "smooth," and "dead smooth." The coarse and bastard cuts are used upon rough and heavy work; the second cuts and smooth cuts are used for finer work and for finishing work that has been roughed down by coarser files. The very rough and dead smooth are seldom used.

A file that has one of its edges or sides smooth is called a "safe edge file" and is used in filing in corners where only one side of the corner is being worked.

Files are cutting tools. They should never be thrown into a drawer or be allowed to come in contact with each other or any hardened metal. Keep them in a rack at the back of the bench, each in its own hole, or in a shallow drawer, separated from each other by partitions.

Buy your handles when you buy the files and get good ones. Bore a small hole in each handle to a depth equal to the length of the tang; then counterbore this hole halfway in with a drill or bit of a diameter equal to the thickness of the tang about three quarters up from its point. Drive in the file tang by means of a block of wood held on the file end and struck with a hammer. Never strike a file with anything hard if you value your face.

When buying files and handles, get what is called a "file card," a sort of brush with stiff wire bristles, used for cleaning the files.

Don't allow your files to rust or rub together. Files are the most abused tools in the world and yet among the most useful. You can't get along without files, and they cost money, so take good care of them.—HENRY S. LARABY.

Fixing Shade Rollers

"live" end roller, as shown, and work it under and around the latches. Talcum powder or ordinary toilet powder is made from soapstone and is a dry lubricant. It is advisable not to use oil, which will collect dust and in time make matters worse.—E. W. CORNELL, Adrian, Mich.

WHEN a window-shade roller refuses to hold, dust some talcum powder on the



Removing Varnish

IN REMOVING old varnish from floors and other woodwork with varnish remover, the work may be speeded up and lightened by using an ordinary squeegee, such as is used by window washers, instead of steel wool or a scraper. If the varnish remover is applied generously, almost all of the old varnish may be removed in this way by going over the floor once. The squeegee is used as in cleaning a window.

PATENTS

Seventy-six Years of Practice

THE firm of Munn & Company filed its first application for a patent in 1846, and for seventy-six years has endeavored to keep pace with the inventive genius of the United States. An experience of many years is at your disposal. If you have an invention which you wish to patent, send your sketches or model together with a description of your device, explaining its operation, and you will receive prompt, courteous attention.

Write for our Handbook on PATENTS

A full and complete booklet on Patents, Designs, Trade-Marks, Foreign Patents, Copyrights, Labels and Patent Office Practice with an explanation about our methods, terms, etc.

All communications strictly confidential

Keep in touch with the inventions of the world by reading
SCIENTIFIC AMERICAN

The MONTHLY MAGAZINE with a special appeal to every man of inventive genius. Recent rulings of the Patent Office, descriptions of the latest patented inventions, legislation and court decisions affecting patents, are noted in this authoritative publication.

MUNN & COMPANY Patent Attorneys

683 Woolworth Building, New York City

Scientific American Bldg., Room 3, 625 F Street, Washington, D. C.

801-D, Tower Building, Chicago, Ill.

602 Hobart Bldg., San Francisco, Cal.

**"I have averaged \$7000
Per Year for Three Years—Have Made
Over \$90 PROFIT in One Day"**

That is the statement of Frank DePries, one of our live-wire representatives. Keeton of Mississippi made \$252 on his first sale. Vickers of Alabama made \$118 in one week. Conant quit a \$6,000 job to come with us.



DePRIES

**Ford
Auto
FREE!**

We have a plan whereby our active workers can get a Ford without cost, in addition to their big cash earnings. Get the plan—quick!



AGENTS WANTED

We need more men like these, because the demand for our Super Fyr-Fyter is growing by leaps and bounds. Sells to garages, stores, factories, schools, homes, hotels, auto owners. Approved by the Underwriters. If you are willing to work and ambitious to make some real money, get our plan. You need no experience, as we train you without cost for the work. No great capital required. Good territory going fast. Better write us at once.

THE FYR-FYTER COMPANY

1714 Fyr-Fyter Bldg.

Dayton, Ohio

WINDOW SIGNS



AGENTS 500% PROFIT Genuine Gold Leaf Letters GUARANTEED TO NEVER TARNISH

For Store Fronts, Office Windows, Bank Windows, Office Doors, Panels, Board Signs, Trucks, Automobiles and Glass Signs of all kinds. No experience necessary. Anyone can put them on and make money right from the start without previous experience. All you have to do is to show your samples, the letters are very attractive and easy to sell. Letters costing 3 1/2c sell for 25c. One agent says: "Your letters are the best thing I have seen in years. I have made \$125.00 the first week and still going strong." Paul Clark says: "Smallest day \$28.70." H. Gilder made \$835.00 in six weeks.

\$60 to \$200 a Week

GENERAL AGENTS

It is easy to appoint sub agents for this line. We pay you 20% each commission on all orders we receive from local agents appointed by you anywhere. We allow you 50% discount on your own orders. You can sell to nearby trade or travel all over the country as you please. Large demand for window lettering everywhere. Write today for free sample, full particulars and liberal offer to general agents.

METALLIC LETTER CO., 433-A N. Clark St., CHICAGO



Print Your Own

cards, circulars, labels, tags, menus book, paper. Press \$12. Larger \$35. Job Press \$150 up. CUTS EXPENSE IN HALF. SMALL OUTLAY. Pays for itself in short time. Will last for years. Easy to use, printed rules sent. Print for others, BIG PROFIT. Write factory TODAY for press catalog. TYPE, cards, paper, envelopes. THE PRESS CO., D-33, Meriden, Conn.



Sell Shirts

Sell Madison "Better-Made" Shirts, Pajamas, and Nightshirts direct from our factory to wearer. Nationally advertised. Easy to sell. Exclusive patterns. Exceptional values. No experience or capital required. Large steady income assured. Entirely new proposition. WRITE FOR FREE SAMPLES. MADISON SHIRT CO., 603 B'way, N. Y. City

MURDOCK HEADPHONES

\$4.00

\$4.50

2000 ohms

3000 ohms



These new low prices make Murdock Headphones a more wonderful value than ever. Standard for over 19 years. Satisfactory service always. Get a pair from your dealer.

A New MURDOCK Product

MULTIPLE PHONE PLUG JACK

(Cord Tip Type)

Enables you to have 4 pair of headphones connected at once. GET ONE.

\$1

AT ALL DEALERS

WM. J. MURDOCK CO.

345 Washington Ave., Chelsea, Mass.
Sales Offices, Chicago and San Francisco.



Free Your Set From INTERFERENCE

The U. S. Army Signal Corps use loops to obtain absolutely unlimited, uninterrupted radio communication. To really enjoy your super-sensitive set, banish interference from static and stray atmospherics by using a loop aerial, the best you can buy—a Warren Radio Loop. More "persistent" than the dangerous, cumbersome old-fashioned outside aerial. Easier to tune. Built on stronger frame and protected from dust, dampness and meddling by tight cover. Types for all wave meter lengths from 175 to 18,000. Most compact, efficient loop perfected. Buy a Warren Radio Loop Now!

A TYPE FOR EVERY SET

Type-A-737 (200-700 meters) 6 inches square—non-directional	\$10
Type-A-7236 (175-1000 meters) 6 inches square—non-directional	\$12
Type-B-2537 (200-700 meters) 18 inches square—directional	\$20
Type-BL-2520 (200-18,000 meters) with honeycomb coil mounting, 18 inches square—directional	\$25

Send for Bulletin U-102

V-DE-CO RADIO MFG. CO. Dept. O, Asbury Park, N. J.

Is There a Polar Paradise?

(Continued from page 31)

It is no speculation of wild improbability to picture a polar paradise like some titan emerald in its alabaster setting. At Disco, Greenland, orchids warmed by natural hot springs blossom out of doors through the bitter sunless winter months!

Weighing carefully all the facts available, we may set the area of the new land at about 50,000 square miles, or roughly the size of the state of Pennsylvania. Its perimeter is bulwarked by a quake-distorted range of mountains buried in eternal ice and snow, and rearing 10,000 feet into the sky. Twisting fiords penetrate the ragged ice-gnarled coast.

Just inside the mountains hangs a veil of fog, the vapor of contrasting temperatures. For here we may imagine the aspect changes sharply. Heat from a nether world defies the cold. White of snow and ice shades swiftly to the green of verdant pastures, and gold of wooded uplands.

We come upon a level clearing on which are spread symmetrically half a hundred human habitations. Tall men magnificently built and clad in short and bright-hued loosely fitting blouses are moving leisurely about. Mingling with them are comely, fair-haired women in dainty smocks. Laughing children dash here and there among the shrubbery.

No savages are these descendants of the vanished colony. Indeed, we shall be mistaken if they are not far in advance of our own smug selves in culture, learning, deportment, and social refinement. They have harnessed natural energy to an amazing degree. They know the truths of other worlds. They have mastered the secrets of health.

May Revolutionize Commerce

Yet we need not be swept away by too sanguine a view of what the ZR-1 may find. There are other features savoring more of cold, hard facts than of romance.

For instance, a polar air route cuts the distance to European and Asiatic capitals from 11,000 to 5000 miles. A vast volume of commerce and traffic will be deflected from America toward the Pole.

No matter what the land may be which lies close to the Pole, it will control the Polar Ocean strategically. Appreciation of this fact is evidenced by Amundsen's announcement that his next great effort to be first across will include three planes. And there are whispers that two other powers are grooming entries for the race.

Alaska then must come into her own. She will gather population and stand as an arctic service station to passing planes.

The ZR-1 may get away by early June. The weather then is calm; the daily temperature just above the freezing point. After her 6000-mile flight from Lakehurst to Point Barrow, from which she will eventually take off, there must be a period of final grooming; possibly a trial or two out over the icefields. And by the Fourth of July, 1924, we should know the answer to this most thrilling of all man's geographical conundrums:

Does a polar paradise exist? And, if so, are the vanished Norsemen there?

Here Are Correct Answers to Questions on Page 46

1. Scientists believe that the tiny one-celled animalcules that live in ponds and ditch waters are plant-animal creatures that lived on earth before the animal and plant stem of evolution became divided.
2. The wireless waves are ether waves. They pass through water, earth, and all other kinds of matter in much the same way as they do through air. Wireless signals will pass down through water and can be picked up by apparatus inside the submarine just as if it were on the surface.
3. Soap contains a material that has the ability to stick very tightly to things. It creeps over their surfaces as a film of oil will creep over the surface of water. When you wash your hands, a very thin film of this material creeps all over your hands next to the skin. It even creeps in underneath any particles of dirt that happen to be sticking to your skin. It pushes these loose and the water washes them away.
4. The earth is shrinking slowly and this puts a good deal of strain on the surface rocks, especially in parts of the earth where the rocks are being forced up into the mountain wrinkles. Sometimes a few layers of the rock break under this strain and the rocks on one side of the break slip up or down or sidewise. The shock of this slip makes an earthquake.
5. No. It used to be believed that certain foods, especially fish and other foods containing phosphorus, were especially valuable for the gray matter of the brain. This is not believed any more. Brain cells apparently use the same kinds of food materials as all other living cells do. The best way to feed your brain well is to keep your body in good health.
6. Because of the currents in the ocean. Off the coast of Maine there is a cold current coming from the polar regions and flowing southward. It cools the air and makes the climate colder. Off the coast of France there is a warm current—the Gulf Stream. This gives a warmer climate.
7. Because the bird is touching only one wire. No electric circuit is completed.
8. No. If anything, they are more healthy. Prehistoric skeletons, as well as the mummies of ancient Egyptians, show they suffered from many of our diseases.
9. We are not sure, but it is probable that they migrated from Asia across the Behring Straits thousands of years ago. The easternmost point of Asia was probably connected then with Alaska by a land bridge that since has been submerged.
10. Food keeps on cooking as long as it is hot. The fireless cooker merely keeps it hot by preventing the loss of heat.
11. Many of the little nerve fibers in the brain that connect one brain cell with another get disconnected temporarily so that the messages between the cells cannot move about as freely as when we are awake. Some stop altogether. Others continue to move in a rather uncertain way, and this is what causes dreams.
12. There is no exact limit. It depends on the way the current passes through the body, on how long it lasts, on the general health, and so on. Ordinarily there is no danger from the usual house light circuits of 100 to 120 volts.

CHEMCRAFT

REGISTERED TRADE MARK
THE CHEMICAL OUTFIT



How to be a Boy Chemist!

ANY boy can be an amateur chemist and perform hundreds of interesting chemical experiments, just like a real chemist. You can test the things you eat, wear and use every day; make ink, soap, dyes and many other useful things, and get reliable and practical knowledge of the most absorbing science there is today—the Science of Chemistry. You can also do lots of wonderful chemical tricks that will puzzle all your friends.

Chemical experimenting is the most fascinating thing you ever did; there is always something new and different to do every day. And you can do it all with a CHEMCRAFT outfit. When you get your outfit you can join the Chemcraft Chemist Club; be the Chief Chemist of your own Local Chapter and get other boys in with you, just like Fred Luce did. His picture is shown above. Plan now to get your outfit this Christmas. Tell everyone that's what you want.



Here is Chemcraft No. 3. Isn't it a dandy outfit?

Select from These Five Dandy Outfits

No. 0, 75c; No. 1, \$1.50; No. 2, \$2.50; No. 3, \$5.00 and No. 4, \$10.00.

(West of Denver, Colo., and in Canada, these prices are 10% higher.)

Each outfit is complete in itself and contains an assortment of harmless chemicals, all necessary laboratory apparatus and a Manual of Instruction. Chemcraft is sold in all good toy stores, but look for the name on the box and in that way be sure to get the original and best. If you cannot get the outfit you want, we will fill your order direct upon receipt of price.

Free to Boys!!

Send your name and address now for a Free Copy of the Chemcraft Chemist Club Magazine. It's full of dandy stories, fine experiments and Club news.

THE PORTER CHEMICAL CO.

Porter Products Puts Science at Your Service
127 Washington St., Hagerstown, Md.

Motorcycle Bargains

SAVE 25% to 65%

on Slightly Used and Rebuilt Motorcycles, Ace, Indian, Excelsior, Harley-Davidson, Cleveland, Side Cars, Johnson Motor Wheels, Evans Power Cycles, Bicycles. Send for Free Bargain Bulletin and Money Saving Message, listing hundreds of bargains in used, rebuilt and new machines, supplies, accessories, etc.
AMERICAN MOTOR CYCLE CO.
Dept. 1226 2047 W. Chicago Ave. CHICAGO



"LIGHTING FIXTURES"

Ready to hang.
Direct from manufacturers.
Completely wired including glassware.
Send for Catalogue No. 24 and Dealers' proposition.

ERIE FIXTURE SUPPLY CO.
Desk A, Erie, Pa.



Art Corner Your Pictures-Album

where you can keep them safe and enjoy them always.

Engel
5 Styles "Art Corners" Colors
are on sale at Photo Supply and Album counters everywhere. They are the only Quick, Easy, Artistic, No Paste, No Fold way to mount Kodak Prints. A dime brings 100 and samples to try. Write
ENGEL MFG. CO.
100 Buys 100 Dept. 552 4711 N. Clark St., Chicago



BATTERY CHARGING PAYS \$1500 to \$3000 a Year



Small cash payment brings you HB 8 hour charging outfit. Easy terms of only \$50 monthly let your profits pay balance with nice surplus besides. Thirty day free trial on money back guarantee lets you try HB outfit at our risk. HB patented voltage-regulating winding absolutely prevents reversing. Saves current. Start now to make \$150 to \$300 Mon-hy with HB 8 hour battery charger. Write today for information.

HOBBART BROS. CO.
Box P12, Troy, Ohio



\$95 an Hour!

"Every hour I spent on my I. C. S. Course has been worth \$95 to me! My position, my \$5,000 a year income, my home, my family's happiness—I owe it all to my spare-time training with the International Correspondence Schools!"

Every mail brings letters from some of the thousands of I. C. S. students telling of promotions or increases in salary as the rewards of spare-time study.

What are you doing with the hours after supper? Can you afford to let them slip by unimproved when you can easily make them mean so much? One hour a day spent with the I. C. S. will prepare you for the position you want in the work you like best. Yes, it will! Put it up to us to prove it. Mark and mail this coupon now!

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7666-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

BUSINESS TRAINING COURSES

- | | |
|--|---|
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Industrial Management | <input type="checkbox"/> Advertising |
| <input type="checkbox"/> Personnel Organization | <input type="checkbox"/> Better Letters |
| <input type="checkbox"/> Traffic Management | <input type="checkbox"/> Show Card Lettering |
| <input type="checkbox"/> Business Law | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law | <input type="checkbox"/> Business English |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service |
| <input type="checkbox"/> Cost Accounting | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary | <input type="checkbox"/> High School Subjects |
| <input type="checkbox"/> Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating |

TECHNICAL AND INDUSTRIAL COURSES

- | | |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Blue Print Reading |
| <input type="checkbox"/> Mechanical Engineer | <input type="checkbox"/> Contractor and Builder |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Concrete Builder |
| <input type="checkbox"/> Railroad Positions | <input type="checkbox"/> Structural Engineer |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer | <input type="checkbox"/> Automobile Work |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Airplane Engines |
| <input type="checkbox"/> Metallurgy <input type="checkbox"/> Mining | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics |

Name.....
Street.....
Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

This Wonderful Invention



converts any cook stove into a gas stove. Oxo-Gas made from kerosene and air is cheaper, cleaner and more efficient than coal. Send for

catalog illustrating Oxo-Gas appliances for all purposes where coal is used. We have openings for General Sales Managers and distributors. Only those who can finance themselves considered.

GLORIA LIGHT COMPANY
108 N. MAY ST. CHICAGO, ILL.

Evolution—A Universal Law

(Continued from page 57)

Science itself, being merely a tissue of known facts and accepted ideas, is subject to evolution. In primitive medicine, for example, it was customary to cut a hole into the skull in order to relieve headache. The idea, one imagines, was to let out some spirit or other evil creature who was believed to be producing the pain.

These ideas have evolved. We think differently nowadays about the cause of headache and we treat it, we feel sure, more successfully. Yet it is probable that the physicians of a few thousand years from now will look back on the medical theories and practices of 1923 with the same curious pity that we feel for the savage surgeons who cut into living skulls to let the demons out.

But the evolution of ideas and of customs, like that of human inventions, belongs really to the evolution of life. The body of man has evolved and his mind with it. To prove that evolution is a universal law we must produce evidence more fundamental than this. We must show that evolution applies to non-living matter as well as to living matter. Can this be done?

Evolution Applies to the Stars

It can. One of the greatest achievements of modern science is that it has been able to prove within the past 20 years that evolution applies not only to life and to all products of life, but also to things as lifeless and as fundamental as the stars and the chemical elements.

If you take a telescope and go off adventuring with the astronomers into the depths of space, you will find that all the stars you can see are great suns like our own sun, many of them, in fact, much larger and hotter and mightier even than it is. All these star-suns belong, the astronomers find, to a single series, like the children of one family.

But the family of stars has one great difference from a family of children. The youngest stars are not the smallest ones, but the largest. The baby stars, born only a few billion years ago, are tremendously big. The old, old stars, millions and millions of years old, are small and shrunken and nearly dead.

What happens to the family of stars, the astronomers believe, is about like this: The first stage of a star, so far as we now know, is probably what is called a dark nebula. This is merely a vast cloud of very thin gas or dust spread about in a certain part of space. It sends out no light, so it looks dark. Gradually this cloud draws itself together into a more or less globe-shaped mass. As it does so, it becomes hot. It begins to shine. It enters the first visible stage of a star, a baby star in years, but a giant star in size.

One of the stars that is in this stage is the great red star called Betelgeuse that forms the shoulder of the hunter in the constellation of Orion. The size of this star was measured recently by the astronomers at the Mount Wilson Observatory, and it was found to be so vast that if it took the place of our sun, the entire orbit

(Turn to page 141)

Novelty



Musical Instruments

Not toys—but high-grade practical instruments for Symphonic or Jazz orchestras. Great for solo work at Club, Lodge or Legion gatherings or home entertainments. Anyone can play with a few simple lessons, furnished with each instrument.

Musical Pitch Fork Glassophone Jazz-O-Netto
Mando-Zi Harp Musical Saw Honner Sax

Free Trial Try any of these instruments for 15 days. If not satisfied, if you can't learn to play it quickly and easily, return at our expense. Remarkably low prices. Easy Time Payments. Send today for new, illustrated catalog describing complete line.

MUSSEHL & WESTPHAL
434 S. Water Street Ft. Atkinson, Wis.

LOFTIS BROS. & CO. EST'D 1858

Genuine DIAMONDS Guaranteed

Cash or Credit

We import Diamonds direct from Europe and sell direct by mail—a great saving to you. SEND FOR CATALOG. Everything fully explained. Over 2,000 illustrations. CREDIT TERMS on all articles: One-fifth down, balance divided into equal payments within eight months.

The Loftis Carved "Perfection" Diamond Ring illustrated in Solid 14-K Green Gold, 14-K Yellow Gold, 14-K White Gold, Bridal Blossom design. Wedding Rings to match.

Blue White Brilliant, Perfect Cut Diamond. Starless Value at \$50, \$75, \$100, \$125 and up.

18-K Solid White Gold, 17 Jewels, \$35
14-K Solid White Gold, 10 Jewels, \$29

High-grade Railroad Watches Guaranteed to Pass Inspection

HAMILTON No. 992, 21 Jewels, \$56.00
Adjusted to 5 Positions. 25-Year Case

ILLINOIS "BUNN SPECIAL," 21 Jewels, Adjusted \$55.00
to 5 Positions. Gold filled 25-Year Case

ELGIN "FATHER TIME," 21 Jewels, Adjusted \$52.50
to 5 Positions. Gold filled 25-Year Case

Satisfaction Guaranteed or Money Refunded
LOFTIS BROS. & CO. National Jewelers
Dept. G-571 108 N. State St., Chicago, Ill.
Stores in Leading Cities

Quick action!

So often, where a liniment is required, there is need for an antiseptic. And where an antiseptic is required, there is often need for a germicide. Have all three in one container. \$1.25 at drug-gists or postpaid. Liberal trial bottle, postpaid, 10c.

W. F. YOUNG, Inc.
350 Lyman Street
Springfield, Mass.

Absorbine Jr. THE ANTISEPTIC LINIMENT

AGENTS: \$6 PER DAY AND UP

Selling concentrated, non-acidic food flavors. Always fresh. Put up in collapsible tubes. Ten times the strength of bottled flavors. Guaranteed under U.S. pure food laws. All flavors. Sells in every home. Used every day. Not sold in stores. Big demand. Big repeater. 100% profit.

Men or Women

can make big money. Have sold over \$100 in one month. You will find this a big, easy seller and a sure repeater. Must satisfy customers or money back. Write for territory and sample outfit. Get a big line of customers. Get repeat orders every month and have a steady income. Write quick.

American Products Co.
8895 American Bldg., Cincinnati, O.



ACT QUICK WRITE TO-DAY

Evolution—A Universal Law

(Continued from page 140)

of the earth would lie inside it. Yet the matter of the star is very thin. It is a bubble of highly rarefied gas rather than a solid ball like the earth, or a globe of dense gas, almost liquid-like, such as we believe our sun to be.

What will happen to this young giant star as it grows older we can foresee, we believe, from the present condition of other stars. It will grow smaller and denser and at the same time hotter. After a while it will be a brilliant white star like the dog-star Sirius. Though it will continue to shrink, it will stop growing hot. Instead, it will cool off a little and its light will become more and more yellow. Presently it will resemble our sun, which is a star past the first vigor of youth and well along in middle age. Finally, as it cools off more and more, Betelgeuse will become still smaller, more and more reddish in color, less and less brilliant, more and more dense. In the end it will be altogether dark and probably solid.

Every Star Is Changing

Every one of the thousands of stars that you see in the sky and each of the millions more that the astronomers have counted on their telescopic photographs is believed to represent a definite stage in this development from a dark gas cloud.

There are many details of this evolution that we still do not know. But of the fact that stars change there can be no question at all.

And with the chemical elements the proof is just as sure. A distinguished and sincere opponent of the theory of human evolution, Mr. William Jennings Bryan, has argued that if evolution be true of life, it ought to be true of everything, and that since (as he believes) it is not true of the chemical elements it cannot be considered true of life.

It is unnecessary to pause over the weak logic of this argument—the obvious possibility that evolution might be true of life and still not be applicable to everything. The evolutionist need not quibble. He can accept the argument on Mr. Bryan's own ground. If the theory of evolution is to stand or fall, as Mr. Bryan argues that it must, on the question of its applicability to the chemical elements, it will stand and Mr. Bryan should accept it. For the chemical elements *do* evolve and science has proved that they do.

The outstanding example of this chemical evolution is the element radium. The peculiar properties of this element—its continual emission of heat, the rays from it that affect a photographic plate, its ability to make the air about it a conductor of electricity, its curative properties in disease—all are due to the fact that the atoms of radium are in evolution.

Radium belongs, in fact, to a series of no less than 27 chemical elements that make up a known evolutionary series. The first one, the original parent element (so far as we now know) of the entire series, is uranium. Uranium changes after a while into another element called Uranium X, this into a third and so on for four changes. The fifth element is radium.

(Continued on page 142)

Men Wanted Mechanically Inclined

YOU want to make more money. You want to do the work you like. You hope to be independent, to be your own boss. Perhaps you want to travel and see the world. You want to get out of the rut. You want a job with a real future. Then learn about the opportunities that exist everywhere, at home, in your own town, on rural routes, state highways, cities, etc., offering every choice of climate and living conditions, of starting your own business, as a garage or tire service shop. Auto mechanics are needed everywhere, and men who want to travel and see the world but don't want the responsibility of owning their own place find jobs at \$50 a week and up quicker than any other line of work.

Over sixty thousand men have proved this to be true, and over twenty thousand are running their own business. These are the interesting figures from the records of the world's greatest and most successful trade school, the Million Dollar Sweeney Auto School at Kansas City.

How to Be Sure of a Steady Job

I am teaching the most practical, most profitable, easiest learned trade in the world. I am teaching white-collar boys from cities who want to get into overalls, and boys from the farm who want the bigger opportunities and advantages of city life. I am teaching coal miners, factory employees, unskilled laborers of all kinds, men who want to quit being wage slaves whose job a strike or bad business or employer's whim can terminate without warning. Who want a chance to be independent, make real money, and own their own business. I refer you to sixty thousand men who found the way to success by sending for my catalog. The Sweeney trained men are ready to **HOLD GOOD PERMANENT JOBS**. To be partner or owner in a garage. To be independent. To be in business for himself. He is not working in a factory that may close down overnight, on a railroad where a strike may put him out of business, in a coal mine where labor troubles may send him to the bread line. He has **CAPITAL** in his head and hands.

Be Your Own Boss

Of the 60,000 Sweeney Graduates I estimate that 20,000 of them own garages, tire shops, vulcanizing and service shops. It is easy to start in business for yourself. Then you don't have to bow down to some employer and do work you don't like. I say work for yourself, then you are not bothered by strikes and lockouts or factories closing down. **OWN YOUR OWN BUSINESS**. Work for yourself with enthusiasm, not drudgery. It's the yearning of every young man to **BE HIS OWN BOSS**, and Sweeney makes it possible.

Sweeney trains men in eight weeks in the Auto and Tractor business, and you don't need previous experience.

The man who writes for my CATALOG has taken the first step towards his **OWN BUSINESS**. Towards independence and prosperity. It's just your own lack of energy and enterprise that's holding you back! Trust yourself. I will show you **HOW EASY** it is to be a man of standing and importance in your town.

A Billion Dollar Business

The **AUTOMOBILE BUSINESS** is America's greatest industry. It employs twice the capital of the National Banks in the United States. In 1922 people paid **ONE BILLION, FOUR HUNDRED AND NINETY MILLION DOLLARS FOR TIRES**, and over **SEVEN HUNDRED MILLION DOLLARS** for parts and accessories. Yet this great business is just beginning. In ten years there will be over 23 million pleasure cars alone. That is about one for every family. Trained mechanics are in demand. Hundreds of thousands of them are needed not only as mechanics but as salesmen, garage owners, tire repairers, dealers, demonstrators, chauffeurs, etc.

The smart man will **QUIT** his job and learn

a **SURE TRADE**. He will **BUILD A BUSINESS OF HIS OWN**. He will be independent and not at the mercy of strikes, depressions, and circumstances beyond his control.

There was never a time when a man should consider his future and plan to put himself on a sure foundation more opportune than **TODAY**. Don't be a wage slave!

In thousands of localities there are opportunities for garages, repair shops, tire shops, sales agencies. Radio offers similar independent opportunities. Own your own shop. Stand on your own feet! How can you get into this great business?

What Others Have Done

There are opportunities everywhere. Other fellows with money are often looking for trained men to handle the mechanical end as partners.

Look at Clayton Eden's nice garage at Ainsworth, La. Clayton says: "We operate the leading garage. Have all the business we can do. Also handle Hudson, Essex and Buick cars. Owe my present success to the wonderful training received at the Sweeney School."

Roy A. Atkinson sent me this letter from Everett, Mo. "Worked on a farm," says Roy. "At nineteen had only \$14.00. Got father to send me to the Sweeney School. Three days after I came home I fixed a neighbor's Ford car. That was my start. Today this garage is worth \$4,785.00. My business takes three men to handle. I never worked in any other garage. I used my Sweeney training. If you want to get that start, do as I did and go to the Sweeney School."

Look at John Boyer's garage at Millford, Ill. John says: "Having a good business; busy all the time."

From far off Australia S. A. Noller writes business is fine.

What these boys have done **YOU** can do. If you like mechanics, write me today for my big free Catalog. Mail the coupon today or post card will do.

What Is the Sweeney System?

The Sweeney System is the practical way—the only way to learn if you want to get into the Automobile business at the least possible expense of time and money.

It is easy—requires no previous education—no books—only eight weeks' work. Our way of training is interesting in the extreme because it is so practical; no guesswork to it. Just like a boy told me this morning. He said: "I really ought to go home and help the old man with his crop, but I never had so much fun and worked as hard and learned more in my life." He said he could spend six months here and every day learn something new.

Get this Free Catalog

If interested in bettering your condition, simply send name today and get a free copy of my new illustrated 64-page catalog and a free copy of the interesting Sweeney News; also many pictures showing men at work and play in this world-famous school. I will also tell you about a special new offer I am making, and some interesting opportunities in this line of work. There is no cost, no obligation, no one will call on you, or bother you. No colored students accepted. Just send name today to E. J. Sweeney, President, **SWEENEY AUTO AND ELECTRICAL SCHOOL**, Dept. 1258, Kansas City, Mo.

Here's Your Coupon

SWEENEY AUTO & ELECTRICAL SCHOOL
1258 SWEENEY BLDG.
KANSAS CITY, MO.

DEAR E. J. SWEENEY: More money is just what I need—
Please tell me, but without obligation of opportunities in
the Auto Business. Send me your **FREE CATALOG!**

Name _____
Street _____ State _____
City _____

Save \$35.00

Recover your old auto top frame yourself. \$4.45
Parcel Post Paid AND UP

Custom tailor made to fit all makes and models of cars. Any person who can drive a car can put it on. Roof and quarters sewed together, with rear curtain, fasteners, welts and laces complete. Give name, year and model number of your car, and we will send you catalog with samples.

Liberty Top & Tire Co., Dept. E-5, Cincinnati, O.

BUCHSTEIN'S FIBRE LIMB

soothing to your stump—
strong, cool, neat, light.
Easy payments.

Guaranteed 5 Years
Send for Catalog Today

P. BUCHSTEIN CO., 113 6th St., MINNEAPOLIS, MINN.

BURN YOUR NAME ON TOOLS WITH ARKOGRAF

Protect your tools from theft. Write any name, engrave any design on metal with electricity like writing on paper with pen or pencil. Complete outfit \$3.00, prepaid anywhere. Interesting descriptive circulars free. Write today. Agents wanted.

Arkograph Pen Co., 481-A East Couch St., Portland, Oregon


10¢ A DAY and Up

Bargain Prices

Celebrated Symphonola Phonographs

Genuine Mahogany, Walnut, or Oak. Portable and cabinet models. 10¢ a day and up pays. Plays any record. Write **TODAY** for Big **FREE Book**.

Larkin Co.
Dept. S-1240 BUFFALO, N. Y. PEORIA, ILL. CHICAGO, ILL.

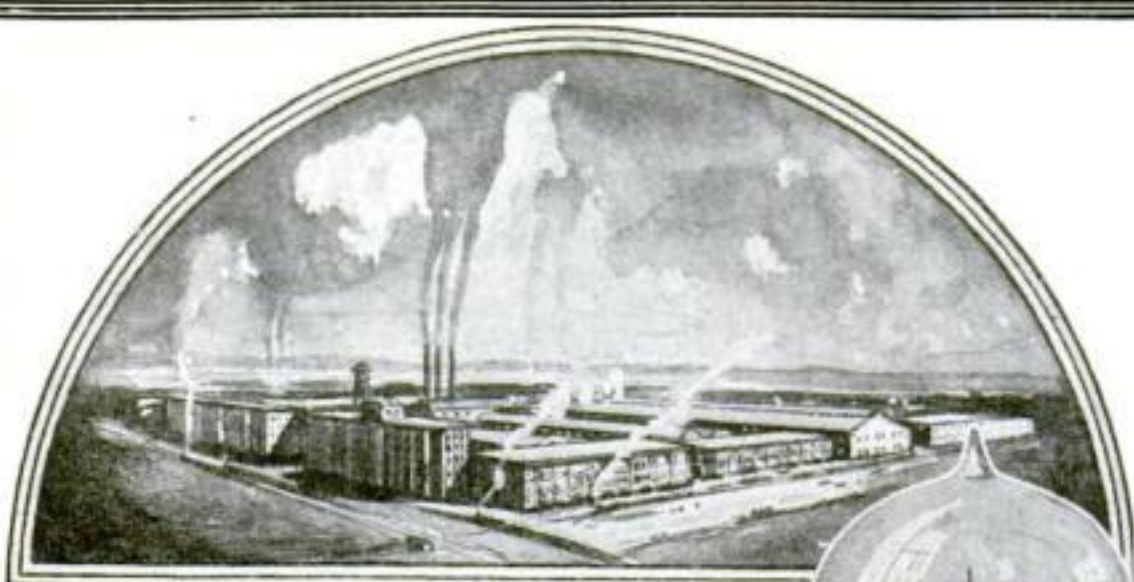

Cunningham tubes

A MONUMENT TO
SCIENTIFIC RESEARCH

CUNNINGHAM VACUUM TUBES, built by one of the world's largest manufacturers with unlimited resources, are the product of years of research and development work by that great scientific organization, the Research Laboratory of the General Electric Company.

The development of the special filament used in the two new Cunningham Tubes, type C-301-A, and C-299, is truly a monument to the scientific skill of that organization and the ability of its engineers.

The outstanding feature of this filament is its property of high electron emission at a low temperature. This results in a Vacuum Tube having a greatly increased output, with only a fraction of the filament power consumed by previous types.



Patent Notice: Cunningham Tubes are covered by patents dated 11-7-05, 1-15-07, 2-18-08, and others issued and pending. Licensed for amateur, experimental and entertainment use in radio communication. Any other use will be an infringement.

E. J. Cunningham Inc.

Home Office: 182 Second St.,
San Francisco, Calif.

154 West Lake Street
Chicago, Illinois

20 Church Street
New York City, N. Y.



$\frac{1}{4}$ Ampere Filament Current.
Mutual Conductance 700 Micromhos.

CUNNINGHAM RADIO TUBES
C-301A—6 volts $\frac{1}{4}$ amp. Amplifier.....\$6.50
C-299—3 volts .06 amp. Dry Battery Det.
and Amp..... 6.50
C-300—6 Volts Gas Content Detector..... 5.00
C-11—1.1 Volts .25 amp. Dry Battery
Det. and Amp. Special Base..... 6.50
C-12—Similar to C-11 with standard base 6.50

Evolution—A Universal Law

(Continued from page 141)

Then when radium changes, it produces a gaseous element called niton. This, too, evolves and changes into another element, a solid one this time, and so on until we reach an element which, if it changes at all, does so so slowly that we have not yet proved the change. This final element is lead.

No one believes, however, that lead is really final or unchanging. It merely changes so slowly that we have been unable, as yet, to detect the change.

We already have, indeed, some evidence that it does change. Not only lead but all other chemical elements have been found to possess in a very slight degree the same properties that make radium so remarkable. Radium produces much heat, but all kinds of matter produce a little heat. Radium gives out powerful rays, but all kinds of matter give out feeble rays of the same kind. It is probable, therefore, that all kinds of matter are undergoing evolution, though an evolution much slower than the change of radium.

Benjamin Franklin's Insect Story

In an often quoted letter of Benjamin Franklin he speaks of those insects that live only for an hour or two in the summer and he imagines one of these to be describing to its companions the appearance of the world. The flower on which all of them lived was, quite evidently, eternal. Through the length of a long life, urged the oldest of the insects, the flower had not been observed to change. There were, moreover, ancient traditions that through many generations of previous insects there had been no change. How could such a thing as change be thought of in this pleasant perfumed plain?

Now we, who feel sometimes that we live so long and so importantly, have but little longer tenure of this pleasant earth of ours than had the tiny insect of his flower. Things that seem to us unchanging may be no more so, in reality, than is a flower, if only we grant time enough for them to change. Evolution is not a rapid process as men count time. It has required long and able investigation, the accumulation and study of innumerable facts, in order to discern it at all.

But this is not because evolution is concealed. It is because man lives for such a little while. Even the whole billion years of earth history into which we have crowded the origin and evolution of life is but a moment in comparison with the vastness of time.

THE END

FOR FURTHER READING

ON THE evolution of the chemical elements see "Within the Atom," by John Mills, (D. van Nostrand Company, New York, 1922). The conclusion that all kinds of matter are slightly radioactive rests, in the main, upon experiments by Prof. R. A. Millikan announced in several scientific lectures but not yet published in full. I know of no comprehensive and non-technical book in English on the evolution of the stars. An excellent brief account is "The New Heavens," by Dr. George Ellery Hale, probably the most distinguished living astronomer. It is published by Charles Scribner's Sons, New York, 1922. A good short article on stellar evolution, by Isabel M. Lewis, was published in the *Scientific American* for July, 1923.



How Did Your Garters Look This Morning?

Hurried on in the morning—tossed off at night, your garters are perhaps not so carefully scrutinized as are other articles of apparel. Keep them fresh and lively—the added comfort will repay you. Try the Wideweb "Boston."

GEORGE FROST COMPANY, BOSTON
MAKERS OF VELVET GRIP HOSE
SUPPORTERS FOR ALL THE FAMILY



Hotel
Position
Waiting
for
YOU

EARN up to \$400 per Mo.
Living Expenses Paid

There's an enviable, pleasant, big-paying position waiting for YOU in one of America's fine hotels. Wonderful opportunities for advancement to executive positions.

You Can Qualify

(either man or woman) for one of the many positions to be filled by our graduates. Meals and often rooms provided; chances to save unexcelled. Previous experience unnecessary.

Take the First Step Now

Get particulars regarding the Hotel Operation and Management Course prepared by experts, giving you practical hotel training in a few weeks' spare time. When you graduate we will gladly put you in touch with hotels now asking for S. B. T. I. graduates.

Write for Bulletin of positions open. Mail the coupon NOW.

**STANDARD BUSINESS
TRAINING INSTITUTE**
Carlton Court, Buffalo, N. Y.

Standard Business
Training Institute
Carlton Court, Buffalo, N. Y.
Send me free booklet H-167
giving full information about
Hotel Operation and Management
Course, also Employment
Bulletin.

Name
Street
City

This One



1TRL-18B-3Q6J

How Lively Is Your "B" Battery?

THIS IS NUMBER THREE OF A SERIES

Some people buy Eveready "B" Batteries oftener than other people. This is because each fan has different tastes and desires in radio receiving. Those that demand maximum volume—and to get it use many tubes, forcing them to the limit with high voltages on the plates—are eager and frequent buyers of these batteries.

Others renew them less often. They are the ones that are content with smaller volume and employ fewer tubes at lower plate voltages.

Furthermore, every radio fan, regardless of the tubes he uses, has his own ideas as to when it is time to strengthen the signals with fresh "B" Batteries. Some will long enjoy concerts that others would not consider loud enough. Just what is "too weak" is purely a matter of personal opinion.

These, then, are the things that determine how long you use your "B" Batteries—

1. *The number and kind of tubes.* The more tubes you use and the greater their power, the more current flows from the "B" Battery and the shorter is its life.
2. *The "B" Battery voltage.* The higher it is, the more current flow, from the battery.
3. *The amount of negative grid bias ("C" Battery voltage) on amplifiers.* The greater the bias, the smaller the "B" Battery current.
4. *The life put into the battery in the first place by the manufacturer, and the freshness of the battery when you buy it.*
5. *The signal strength you wish.* The smaller the volume of sound you can enjoy, the longer you can use your "B" Batteries.

The life of any "B" Battery you can buy is affected by the above factors. Subsequent advertisements will set forth each factor in detail.

Eveready "B" Batteries predominate. There is more life in them—they last longer! Blocks of large cells, packed with energy, made especially for radio use, delivered fresh to your dealer, give you the most power for your money—power you can use loudly and swiftly, or softly and slowly, as you wish—Eveready for Everybody.

"the life of your radio"



The Metal Case Eveready "B" Battery, No. 766. The popular 22½-volt Eveready Battery in a new handsome, durable, waterproof metal case. At all dealers, \$3.00.

Eveready "B" Battery No. 767. Contains 30 large size cells, as used in the popular No. 766. Voltage, 45. Made especially for sets using detector and one or more stage of amplification. The most economical "B" Battery where 45 volts are required. At all dealers, \$5.50.



Eveready Radio Battery No. 771. The Eveready "Three." The ideal "C" Battery. Voltage, 4½ — three terminals permitting the use of 1½, 3, or 4½ volts. The correct use of this battery greatly prolongs the life of the "B" Battery. At all dealers, 70 cents.

Manufactured and guaranteed by

NATIONAL CARBON COMPANY, Inc.

Long Island City, N. Y.


EVEREADY

Radio Batteries

—they last longer

Note: This is Number 3 of a series of informative advertisements, printed to enable users to know how to get the most out of their receivers and batteries. If you have any battery problem, write to G. C. Furness, Manager Radio Division, National Carbon Company, Inc., 116 Thompson Ave., Long Island City, N. Y. Write for special booklets on "A," "B," and "C" Batteries.

DON'T BURN COAL!

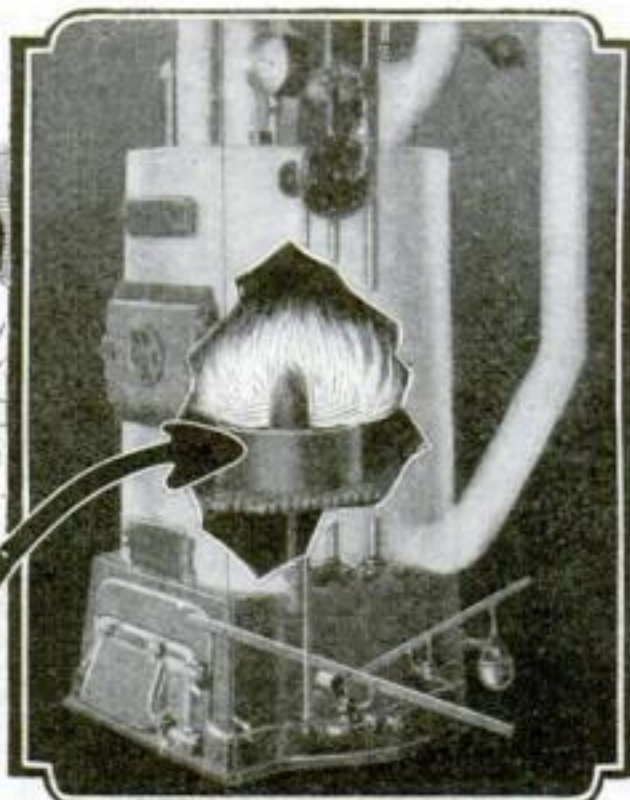

Fits all types of Hot Air, Hot Water or Steam Furnaces without change to your present plant

FITS ANY FURNACE or STOVE

The Oliver burner fits all hot water, hot air or steam furnaces as well as all types of coal or wood ranges and heating stoves. Quickly and easily installed without change. No noisy motors, no electrical connections, no moving parts. This invention equips any furnace to burn a new cheap fuel called Oil-Gas. Three times the heat of coal without any of the drudgery. And so low in price that any family can afford its convenience and cleanliness and comfort.



New Kind of Fuel Replaces Coal In Any Furnace or Stove!

COAL—ashes—dirt—dust—soot—smoke—building fires—cleaning furnaces—carrying ashes—uneven heat—cold rooms—frozen pipes—coal shortages—poor quality—exorbitant prices? NO! Never again as long as you live!

INSTEAD: Quick heat—cheap heat—plentiful heat—clean heat—even heat—warm rooms—smokeless heat—sootless heat—ashless heat—odorless heat—and all this controlled by the turn of valve, or, AUTOMATICALLY by a thermostat, with an installation every family can afford.

Three Times the Heat of Coal

Mr. B. M. Oliver, well known heating expert, discoverer of this new method, calls his invention the Oliver Oil-Gas Burner because it uses 95% air and only 5% oil, the cheapest fuel there is. The result is a perfect fuel gas that burns with an intense, clean flame giving three times the heat of coal.

No Expensive Equipment

This simple device, without noisy mo-

tors, without electrical connections, without any moving parts—converts any type or size of steam, hot water, or hot air furnace into an automatic heating plant. Maintains a steady, even temperature in coldest Winter weather. Quickly, easily installed without any change whatever to your furnace. Absolutely safe. Lasts a Lifetime.


Perfect Heating Guaranteed

The performance of the new Oliver Burner has been so thoroughly tested and proved in over 150,000 homes that Mr. Oliver gives anyone the opportunity of using his invention under an extraordinary guarantee of complete satisfaction.

Low Introductory Offer

Find out now how you can be freed forever from dirt, drudgery and expense of coal fires. Tear out, fill in and mail the coupon below for full description and low price. By mailing coupon at once you will be entitled to the low introductory price offer whether you buy now or later.

The Oliver Burner makes any range a gas stove—on and off at turn of valve

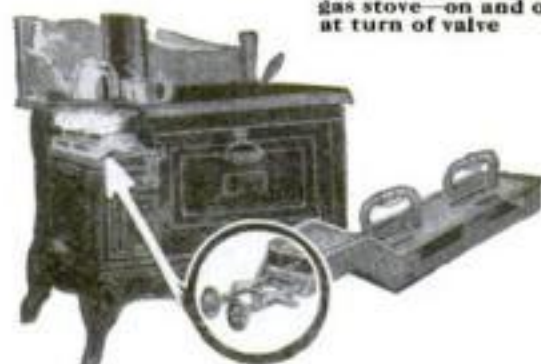

Sizes to fit all heating stoves give warm room at once—no waiting for fires to come up.



AGENTS, SALESMEN and DISTRIBUTORS Demand is enormous. Thousands of spare time workers, agents and salesmen are needed. \$75 a week easy! Many getting \$1,000 a month. Men with selling organizations who can swing whole territory can earn \$10,000 to \$50,000 or more a year. Write or wire at once for details and figures or appointment for interview. Address me personally, B. M. Oliver, at address shown.

OLIVER

OIL-GAS BURNERS

OLIVER OIL-GAS BURNER CO., 2007-L Oliver Bldg., St. Louis, Mo.
Oldest and Largest Manufacturers of Oil-Gas Burners in the World
Canadian Distributor, 2007-L Oliver Bldg., Toronto, Ontario

OLIVER OIL-GAS BURNER CO.

2007-L Oliver Building, St. Louis, Mo.

Gentlemen:—Send me your Free book "New Kind of Heat" and your Special, Low Price, Introductory Offer. I am interested in burner for a

☐ Coal Range ☐ Heating Stove ☐ (Steam) (Hot Water) ☐ (Hot-Air) Furnace

Name.....

Address.....

City..... State.....

The SIXTH SENSE OF INDUSTRY

Tycos Temperature Control

THE crisp, evenly colored crackers that are now to be had in every food store in any part of the country aren't the result of chance.

They are made by the millions—yet whenever you buy them, whether in North Dakota or in New Mexico, Connecticut or California you know they will be of the same dependable quality.

In the old days no two crackers tasted exactly alike. They were made by bakers who depended on their sense of taste. Naturally they varied in taste—and quality.

Today the sense of taste in manufacturing has been replaced by the sixth sense of industry—Tycos.

Certain temperatures, exactly regulated and accurately controlled, are required in making crackers—and all other food products that are baked, boiled, roasted or otherwise cooked before they reach the public.

This exact regulating and control of heat required in baking is supplied by Tycos Instruments.

These instruments are more than human—they work automatically—there is no guesswork in manufacturing when they are used. Tycos Instruments ensure the uniform quality that is essential to any product that has a big sales volume.

MANUFACTURERS


What is your problem of applying the "sixth sense" to your manufacturing? For every process requiring heat control or regulating—in any industry—there is a type and style of instrument in the Tycos Line that embraces over eight thousand varieties of heat control, indicating and recording instruments.

Write us and informative literature on any instrument or type of instrument will be sent promptly. Or, if you prefer, our experts will advise you on how money can be saved in your plant by the application of Tycos Heat Control.

Taylor Instrument Companies

Main Office and Factory
ROCHESTER, N. Y., U. S. A.

Canadian Plant
TYCOS BUILDING
TORONTO
CANADA

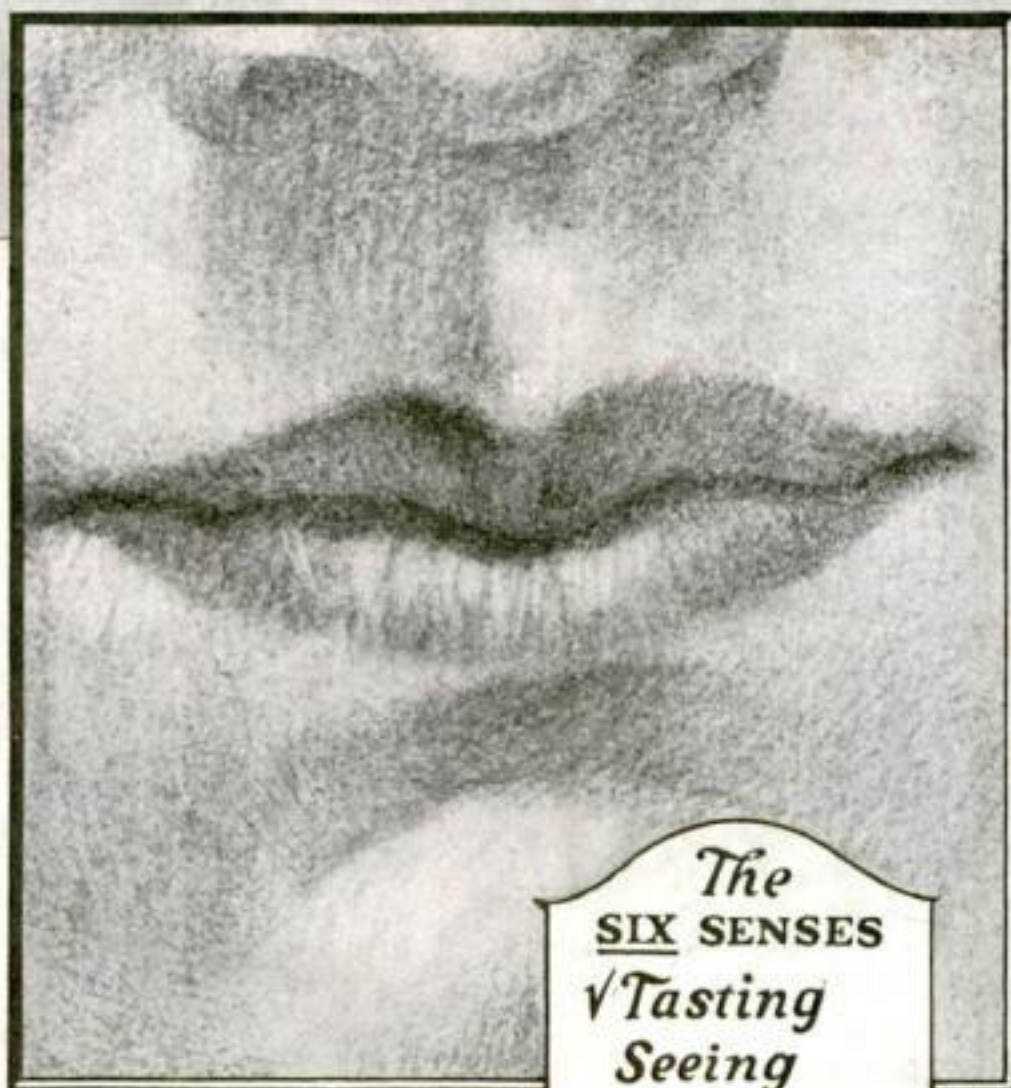

The
SIX SENSES
✓ Tasting
Seeing
Feeling
Hearing
Smelling
and
Tycos
Temperature
Control

Tycos in the Home

Tycos Office Thermometers
An aid in promoting human efficiency.

Tycos Bath Thermometers
To enable you to get the most good from your bath.

Tycos Home Set
Bake Oven Thermometer, Candy Thermometer, Sugar Meter. The secret of accurate results in cooking.

Tycos Wall Thermometers
To help you maintain a temperature in your house conducive to good health.

Tycos Quality Compasses
To show you the right way in unfamiliar country.

Tycos Fever Thermometers
A necessity in every home.

Tycos Stormguide
Forecasts the weather twenty-four hours ahead with dependable accuracy.

Tycos Hygrometer
To enable you to keep the humidity of the atmosphere in your home correct at all times.

Your dealer will show them to you. Ask us, on a postal, for booklets on any of the above.

TYCOS and the MEDICAL Profession

Tycos Sphygmomanometer, Pocket and Office type

Tycos Urinalysis Glassware.

Tycos Fever Thermometers.

Bulletins on request.

Tycos Temperature Instruments



Victrola

REG. U. S. PAT. OFF.



Now is the time to select your Victrola for Christmas

Victrola Instruments and Victor Records are so much in demand for gifts that there is a shortage every Christmas. Place your order now while all the twenty-one instrument styles at from \$25 up and complete record stocks are available.

Ask your dealer or write to us for illustrated catalogs.



Victrola

Look under the lid and on the labels for these Victor trade-marks
Victor Talking Machine Company, Camden, N. J.